



DATA SHEET

# WTM4SP-22161120A00

W4  
Photoelectric sensors

# SICK

Sensor Intelligence

PHOTOELECTRIC SENSORS

WT-  
M4SP-22161120A00



Illustration may differ

ORDERING INFORMATION

Type	part no.
WTM4SP-22161120A00	<a href="#">1131619</a>

Further device versions and accessories at [www.sick.com/W4](http://www.sick.com/W4)



DETAILED TECHNICAL DATA

FEATURES

Functional principle	Photoelectric proximity sensor
Functional principle detail	Background suppression, Foreground suppression, MultiMode, distance value
MultiMode	1 Background suppression 2 Foreground suppression 3 Two Value Teach-in 4 Two independent switching points 5 Window Mode 6 ApplicationSelect

<sup>1</sup> 90% remission factor.

<sup>2</sup> Equivalent to 1  $\sigma$ .

<sup>3</sup> See repeatability characteristic lines.

		M manual / measurement	
Sensing range	Sensing range min.	4 mm (mode 1, 3, 4, 5) 0 mm (mode 2) 4 mm (mode 1 and 6 combined)	
	Sensing range max.	250 mm (mode 1, 3, 4, 5) 250 mm (mode 2) 500 mm (mode 1 and 6 combined)	
	Adjustable switching threshold for background suppression	10 mm ... 250 mm (mode 1, 3, 4, 5) 10 mm ... 500 mm (mode 1 and 6 combined)	
	Adjustable switching threshold for foreground suppression	10 mm ... 250 mm (mode 2)	
	Reference object	Object with 90% remission factor (complies with standard white according to DIN 5033)	
	Minimum distance between set sensing range and background (black 6% / white 90%)	5 mm, at a distance of 150 mm (mode 1, 3, 4, 5) 1.8 mm, at a distance of 100 mm (mode 2) 8 mm, at a distance of 250 mm (mode 1 and 6 combined)	
	Minimum object height at set sensing range in front of black background (6% remission factor)	1.8 mm, at a distance of 100 mm (mode 2)	
	Recommended sensing range for the best performance	40 mm ... 170 mm (mode 1, 3, 4, 5) 40 mm ... 140 mm (mode 2) 50 mm ... 200 mm (mode 1 and 6 combined)	
	Distance value	Measuring range	10 mm ... 250 mm
		Repeatability	0,2 mm ... 6 mm <sup>1) 2) 3)</sup>
Accuracy		Typ. 5.0 mm at 10 ... 50 mm distance <sup>1)</sup>	
		Typ. 6.0 mm at 15 ... 100 mm distance <sup>1)</sup>	
		Typ. 8.0 mm at 100 ... 150 mm distance <sup>1)</sup>	
		Typ. 12 mm at 150 ... 200 mm distance <sup>1)</sup>	
Typ. 16 mm at 200 ... 250 mm distance <sup>1)</sup>			
Distance value output	Via IO-Link		
Resolution	0.1 mm		
Update rate of the distance value	20 ms		
Emitted beam	Light source	PinPoint LED	
	Type of light	Visible red light	
	Shape of light spot	Point-shaped	
	Light spot size (distance)	4 mm (150 mm)	
	Maximum dispersion of the emitted beam around the standardized transmission axis (squint angle)	< +/- 1.5° (at T <sub>u</sub> = +23 °C)	
Key LED figures	Normative reference	EN 62471:2008-09   IEC 62471:2006, modified	
	LED risk group marking	Free group	
	Wave length	635 nm	
	Average service life	100,000 h at T <sub>a</sub> = +25 °C	
Smallest detectable object (MDO) typ.		0.2 mm, At 180 mm distance, mode 1, 3, 4, 5 0.6 mm, at a distance of 140 mm, mode 2 0.1 mm, At 180 mm distance, mode 1 and 6 combined Object with 90% remission factor (complies with standard white according to DIN 5033)	
Adjustment	Teach-Turn adjustment	BluePilot For adjusting the sensing range with mode selection	

<sup>1)</sup> 90% remission factor.

<sup>2)</sup> Equivalent to 1σ.

<sup>3)</sup> See repeatability characteristic lines.

	IO-Link	For configuring the sensor parameters and Smart Task functions
Display	LED blue	BluePilot: Display of mode, display of output states $Q_{L1}$ (LED 3 permanently on) and $Q_{L2}$ (LED 5 permanently on)
	LED green	Operating indicator Static on: power on Flashing: IO-Link mode
	LED yellow	Status of received light beam Static on: object present Static off: object not present
Special features	MultiMode	
Special applications	Detecting uneven, shiny objects, Detection of poorly remitting and tilted objects	

<sup>1)</sup> 90% remission factor.

<sup>2)</sup> Equivalent to 1  $\sigma$ .

<sup>3)</sup> See repeatability characteristic lines.

## SAFETY-RELATED PARAMETERS

MTTF <sub>D</sub>	1,404 years
DC <sub>avg</sub>	0%

## COMMUNICATION INTERFACE

IO-Link	✓, IO-Link V1.1
Data transmission rate	COM2 (38,4 kBaud)
Cycle time	2.3 ms
Process data length	16 Bit
Process data structure	Bit 0 = switching signal $Q_{L1}$ Bit 1 = switching signal $Q_{L2}$ Process data structure: Bit 2 ... 15 = current receiver level (live) mode 1-5. Process data structure B: Bit 2 ... 15 = distance value 0.1 mm (live) mode M.
VendorID	26
DeviceID HEX	0x80031A
DeviceID DEC	8389402
Compatible master port type	A
SIO mode support	Yes

## ELECTRONICS

Supply voltage $U_B$	10 V DC ... 30 V DC <sup>1)</sup>
Ripple	$\leq 5 V_{pp}$
Usage category	DC-12 (According to EN 60947-5-2) DC-13 (According to EN 60947-5-2)
Current consumption	$\leq 20$ mA, without load. At $U_B = 24$ V

<sup>1)</sup> Limit values.

<sup>2)</sup> Signal transit time with resistive load in switching mode.

<sup>3)</sup> Mode 1, 2, 3.

<sup>4)</sup> Mode 4, 5.

<sup>5)</sup> Mode 1 and 6 combined.

<sup>6)</sup> With light/dark ratio 1:1.

<sup>7)</sup> This switching output must not be connected to another output.

Protection class	III	
Digital output	Number	2
	Type	Push-pull: PNP/NPN
	Switching mode	Light/dark switching
	Signal voltage PNP HIGH/LOW	Approx. $U_B - 2.5 \text{ V} / 0 \text{ V}$
	Signal voltage NPN HIGH/LOW	Approx. $U_B / < 2.5 \text{ V}$
	Output current $I_{max}$	$\leq 100 \text{ mA}$
	Circuit protection outputs	Reverse polarity protected Overcurrent protected Short-circuit protected
	Response time	$\leq 500 \mu\text{s}$ <sup>2) 3)</sup> $\leq 1,000 \mu\text{s}$ <sup>2) 4)</sup> $\leq 15 \text{ ms}$ <sup>2) 5)</sup>
	Repeatability (response time)	$500 \mu\text{s}$ (mode 1, 2, 3) <sup>2)</sup> $350 \mu\text{s}$ (mode 4, 5) <sup>2)</sup> $5 \text{ ms}$ (mode 1 and 6 combined) <sup>2)</sup>
	Switching frequency	$1,000 \text{ Hz}$ (mode 1, 2, 3) <sup>6)</sup> $500 \text{ Hz}$ (mode 4, 5) <sup>6)</sup> $30 \text{ Hz}$ (mode 1 and 6 combined) <sup>6)</sup>
Pin/Wire assignment	Function of pin 4/black (BK)	Digital output, light switching, object present → output QL1 HIGH (Mode 1, 3, 4, 5, 6) <sup>7)</sup> Digital output, dark switching, object present → output $\bar{Q}$ L1 HIGH (Mode 2) <sup>7)</sup> IO-Link communication C
	Function of pin 4/black (BK) – detail	The pin 4 function of the sensor can be configured Additional possible settings via IO-Link
	Function of pin 2/white (WH)	Digital output, dark switching, object present → output $\bar{Q}$ L1 LOW (Mode 1, 3, 5, 6) <sup>7)</sup> Digital output, light switching, object present → output QL1 LOW (Mode 2) <sup>7)</sup> Digital output, light switching, object present → output QL2 HIGH (Mode 4) <sup>7)</sup>
	Function of pin 2/white (WH) – detail	The pin 2 function of the sensor can be configured Additional possible settings via IO-Link

<sup>1)</sup> Limit values.

<sup>2)</sup> Signal transit time with resistive load in switching mode.

<sup>3)</sup> Mode 1, 2, 3.

<sup>4)</sup> Mode 4, 5.

<sup>5)</sup> Mode 1 and 6 combined.

<sup>6)</sup> With light/dark ratio 1:1.

<sup>7)</sup> This switching output must not be connected to another output.

## MECHANICS

Housing	Rectangular
Design detail	Slim
Dimensions (W x H x D)	12.1 mm x 41.9 mm x 18.6 mm
Connection	Male connector M8, 4-pin
Material	Housing Plastic, VISTAL® Front screen Plastic, PMMA Male connector Plastic, VISTAL®
Maximum tightening torque of the fixing screws	0.4 Nm

## AMBIENT DATA

Enclosure rating	IP66 (EN 60529) IP67 (EN 60529)
------------------	------------------------------------

# PHOTOELECTRIC SENSORS - WTM4SP-22161120A00

Ambient operating temperature	-40 °C ... +60 °C
Ambient temperature, storage	-40 °C ... +75 °C
Typ. Ambient light immunity	Artificial light: ≤ 50,000 lx Sunlight: ≤ 50,000 lx
Shock resistance	30 g, 11 ms (3 positive and 3 negative shocks along X, Y, Z axes, 18 total shocks (EN60068-2-27))
Vibration resistance	10 Hz ... 1,000 Hz (Amplitude 1 mm, 3 x 30 min (EN60068-2-6))
Air humidity	35 % ... 95 %, relative humidity (no condensation)
Electromagnetic compatibility (EMC)	EN 60947-5-2
Resistance to cleaning agent	ECOLAB
UL File No.	NRKH.E181493 & NRKH7.E181493

## SMART TASK

Smart Task name	Base logics
Logic function	Direct AND OR
Timer function	Deactivated Switch-on delay Off delay ON and OFF delay Impulse (one shot)
Inverter	Yes
Switching frequency	SIO Logic: 900 Hz (mode 1, 2, 3) <sup>1)</sup> SIO Logic: 450 Hz (mode 4, 5) <sup>1)</sup> SIO Logic: 30 Hz (mode 1 and 6 combined) <sup>1)</sup> IOL: 800 Hz (mode 1, 2, 3) <sup>2)</sup> IOL: 450 Hz (mode 4, 5) <sup>2)</sup> IOL: 30 Hz (mode 1 and 6 combined) <sup>2)</sup>
Response time	SIO Logic: 550 μs (mode 1, 2, 3) <sup>1)</sup> SIO Logic: 1100 μs (mode 4, 5) <sup>1)</sup> SIO Logic: 15 ms (mode 1 and 6 combined) <sup>1)</sup> IOL: 600 μs (mode 1, 2, 3) <sup>2)</sup> IOL: 1100 μs (mode 4, 5) <sup>2)</sup> IOL: 15 ms (mode 1 and 6 combined) <sup>2)</sup>
Repeatability	SIO Logic: 200 μs (mode 1, 2, 3) <sup>1)</sup> SIO Logic: 400 μs (mode 4, 5) <sup>1)</sup> SIO Logic: 5 ms (mode 1 and 6 combined) <sup>1)</sup> IOL: 250 μs (mode 1, 2, 3) <sup>2)</sup> IOL: 450 μs (mode 4, 5) <sup>2)</sup> IOL: 5 ms (mode 1 and 6 combined) <sup>2)</sup>
Switching signal	Switching signal $Q_{L1}$ Switching output Switching signal $\bar{Q}_{L1}$ Switching output

<sup>1)</sup> Use of Smart Task functions without IO-Link communication (SIO mode).

<sup>2)</sup> Use of Smart Task functions with IO-Link communication function.

## DIAGNOSIS


Device temperature	Measuring range	Very cold, cold, moderate, warm, hot
Device status		Yes
Detailed device status		Yes
Operating hour counter		Yes
Operating hours counter with reset function		Yes

Quality of teach	Yes
------------------	-----

**CERTIFICATES**


EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
Moroccan declaration of conformity	✓
China RoHS	✓
cULus certificate	✓
Information according to Art. 3 of Data Act (Regulation EU 2023/2854)	✓

**DISPLAY AND ADJUSTMENT ELEMENTS**

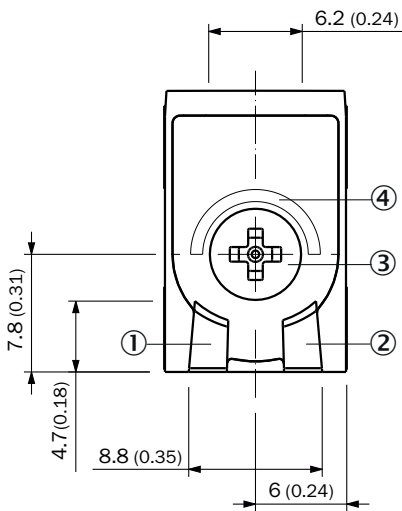


- ① LED green
- ② LED yellow
- ③ Teach-Turn adjustment
- ④ LED blue

**DISPLAY AND SETTING DETAIL**

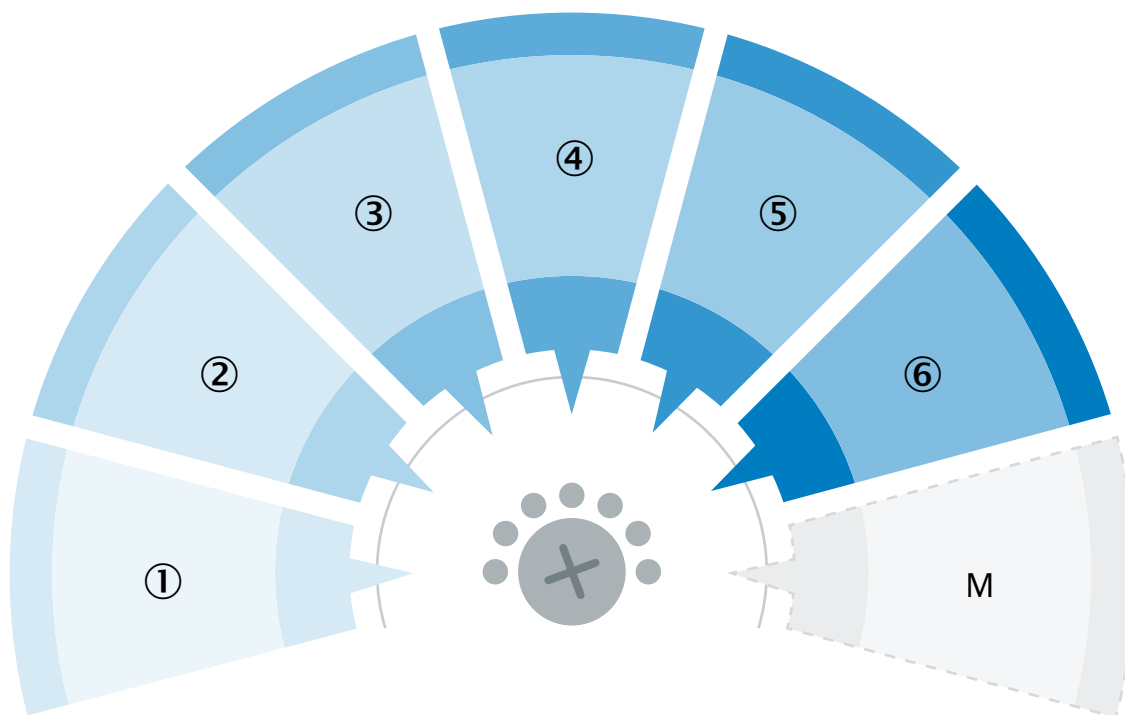


MultiMode settings		
1		Background suppression
2		Foreground suppression
3		Two Value Teach-in
4		Two independent switching points
5		Window Mode
6		ApplicationSelect
M		Manual / measurement


**CONNECTION TYPE MALE CONNECTOR M8, 4-PIN**



**CONNECTION DIAGRAM CD-598 (MODE 1, 2, 3, 5, 6)**



**CONNECTION DIAGRAM CD-597 (MODE 4)**



**TRUTH TABLE PUSH-PULL: PNP/NPN - DARK SWITCHING  $\bar{Q}$  (MULTIMODE 2)**

	Dark switching $\bar{Q}$ (normally open (upper switch), normally closed (lower switch))	
	Object not present → Output LOW	Object present → Output HIGH
Light receive	✔	✘
Light receive indicator	☀	✘
Load resistance to L+	⚡	✘
Load resistance to M	✘	⚡

**TRUTH TABLE PUSH-PULL: PNP/NPN - DARK SWITCHING  $\bar{Q}_{L2}$  (MULTIMODE 4)**

	Dark switching $\bar{Q}_{L2}$ (normally closed (upper switch), normally open (lower switch))	
	Object not present → Output HIGH	Object present → Output LOW
Light receive	⊗	✓
Light receive indicator	⊗	☀
Load resistance to L+	⊗	⚡
Load resistance to M	⚡	⊗

**TRUTH TABLE PUSH-PULL: PNP/NPN - DARK SWITCHING  $\bar{Q}_{L1}$  (MULTIMODE 4)**

	Dark switching $\bar{Q}_{L1}$ (normally closed (upper switch), normally open (lower switch))	
	Object not present → Output HIGH	Object present → Output LOW
Light receive	⊗	✓
Light receive indicator	⊗	☀
Load resistance to L+	⊗	⚡
Load resistance to M	⚡	⊗

**TRUTH TABLE PUSH-PULL: PNP/NPN - LIGHT SWITCHING QL2 (MULTIMODE 4)**

	Light switching $Q_{L2}$ (normally open (upper switch), normally closed (lower switch))	
	Object not present → Output LOW	Object present → Output HIGH
Light receive	✘	✔
Light receive indicator	✘	☀
Load resistance to L+	⚡	✘
Load resistance to M	✘	⚡

**TRUTH TABLE PUSH-PULL: PNP/NPN - LIGHT SWITCHING QL1 (MULTIMODE 4)**

	Light switching $Q_{L1}$ (normally open (upper switch), normally closed (lower switch))	
	Object not present → Output LOW	Object present → Output HIGH
Light receive	✘	✔
Light receive indicator	✘	☀
Load resistance to L+	⚡	✘
Load resistance to M	✘	⚡

**TRUTH TABLE PUSH-PULL: PNP/NPN - LIGHT SWITCHING Q (MULTIMODE 2)**

	Light switching Q (normally closed (upper switch), normally open (lower switch))	
	Object not present → Output HIGH	Object present → Output LOW
Light receive	✓	✗
Light receive indicator	☀	✗
Load resistance to L+	✗	⚡
Load resistance to M	⚡	✗


**TRUTH TABLE PUSH-PULL: PNP/NPN - DARK SWITCHING  $\bar{Q}$  (MULTIMODE 1, 3, 5, 6)**

	Dark switching $\bar{Q}$ (normally closed (upper switch), normally open (lower switch))	
	Object not present → Output HIGH	Object present → Output LOW
Light receive	✗	✓
Light receive indicator	✗	☀
Load resistance to L+	✗	⚡
Load resistance to M	⚡	✗


**TRUTH TABLE PUSH-PULL: PNP/NPN - LIGHT SWITCHING Q (MULTIMODE 1, 3, 5, 6)**

	Light switching Q (normally open (upper switch), normally closed (lower switch))	
	Object not present → Output LOW	Object present → Output HIGH
Light receive	⊗	✔
Light receive indicator	⊗	☀
Load resistance to L+	⚡	⊗
Load resistance to M	⊗	⚡

**CHARACTERISTIC CURVE MODE 2**

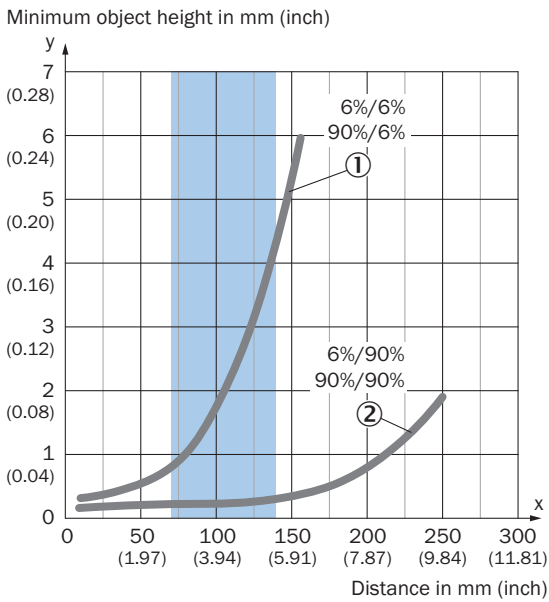

Example:  
Reliable detection of the object

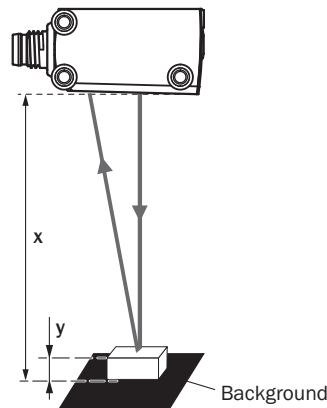


Black background (6 % remission factor)  
Distance of sensor to background  $x = 100$  mm  
Required minimum object height  $y = 1.9$  mm  
For all objects regardless of their colors

Recommended sensing range for the best performance

- ① Black background, 6% remission factor
- ② White background, 90% remission factor

**CHARACTERISTIC CURVE MODE 1 AND 6 COMBINED**


Minimum distance in mm (y) between the set sensing range and white background (90 % remission factor)

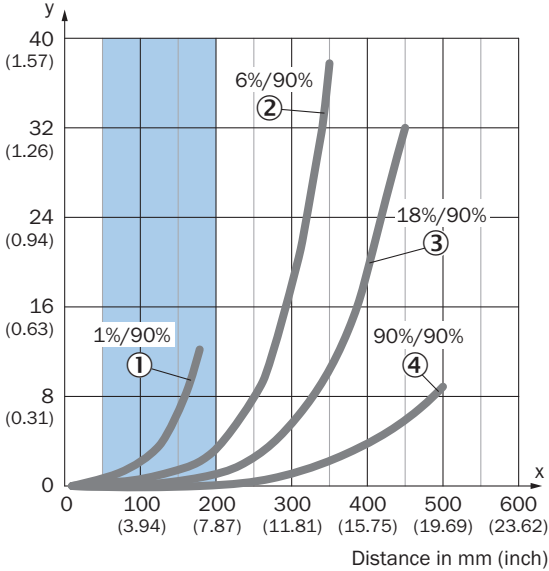

Recommended sensing range for the best performance

- ① ultra-black object, 1% remission factor
- ② Black object, 6% remission factor
- ③ Gray object, 18% remission factor
- ④ White object, 90% remission factor


Example:  
Safe suppression of the background

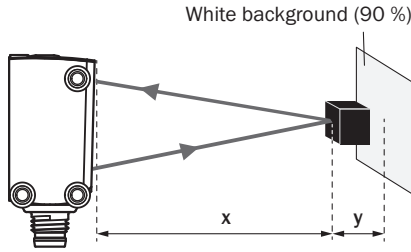

Black object (6 % remission factor)  
Set sensing range  $x = 300$  mm  
Needed minimum distance to white background  $y = 17$  mm

**CHARACTERISTIC CURVE MODE 1, 3, 4, 5**


Minimum distance in mm (y) between the set sensing range and white background (90 % remission factor)

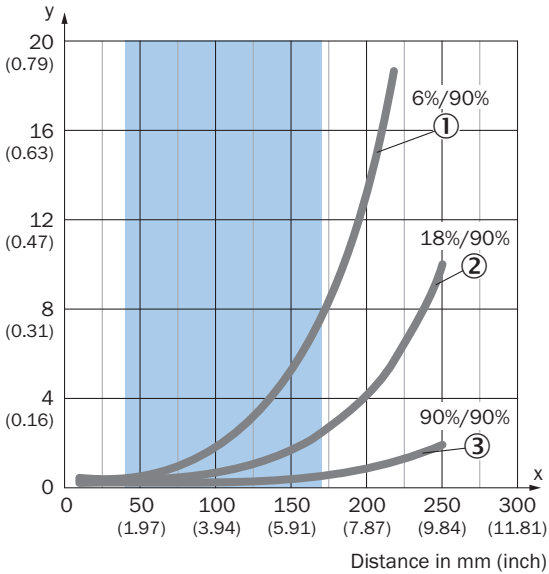

Recommended sensing range for the best performance

- ① Black object, 6% remission factor
- ② Gray object, 18% remission factor
- ③ White object, 90% remission factor



Example:  
Safe suppression of the background

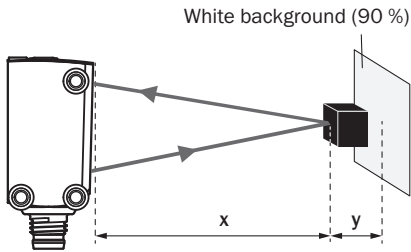

Black object (6 % remission factor)  
Set sensing range  $x = 150$  mm  
Needed minimum distance to white background  $y = 5.5$  mm

**LIGHT SPOT SIZE MODE 2**



Dimensions in mm (inch)

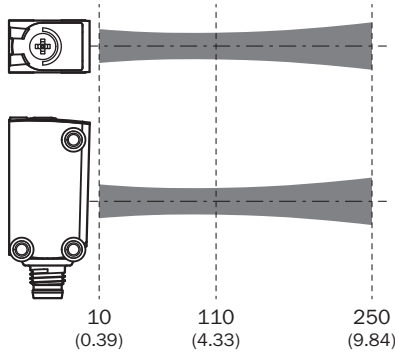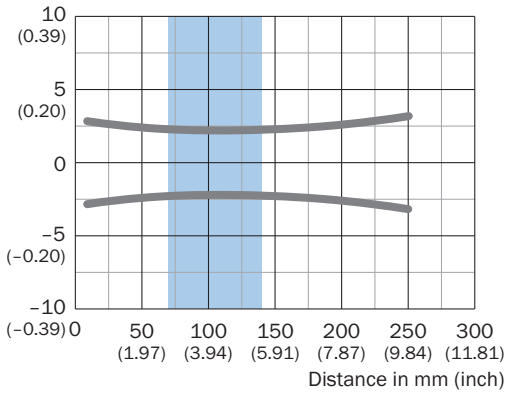

Recommended sensing range for the best performance

**LIGHT SPOT SIZE MODE 1 AND 6 COMBINED**



Dimensions in mm (inch)

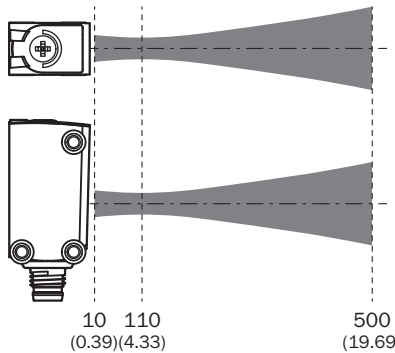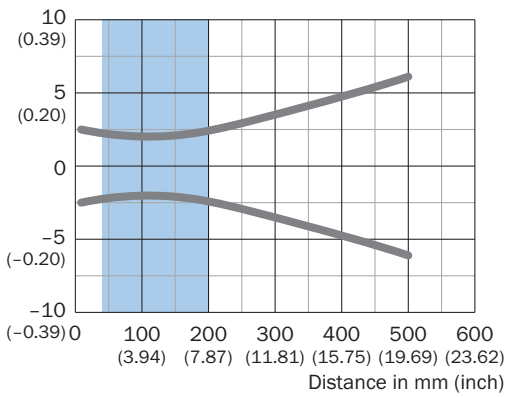

Recommended sensing range for the best performance


**LIGHT SPOT SIZE MODE 1, 3, 4, 5**

Dimensions in mm (inch)

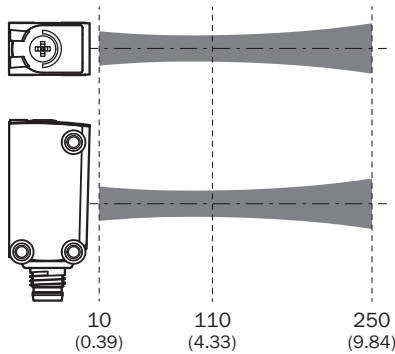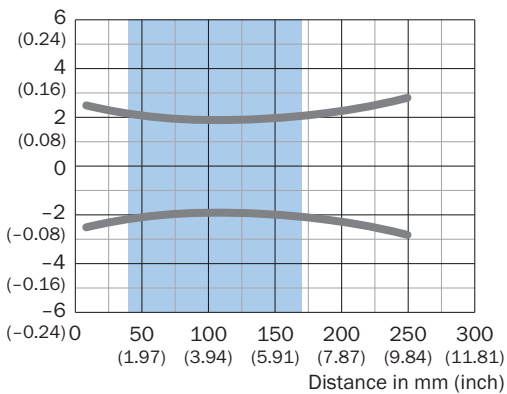

Recommended sensing range for the best performance


**SENSING RANGE DIAGRAM MODE 2**

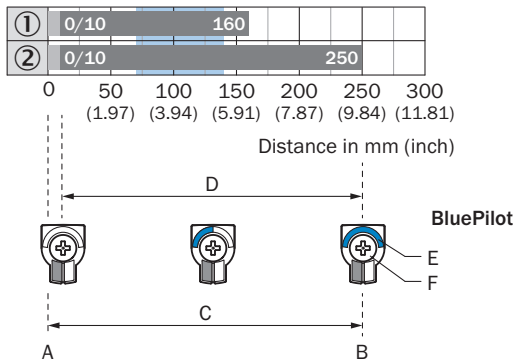

Recommended sensing range for the best performance

1	Black background, 6% remission factor
2	White background, 90% remission factor
A	Sensing range min. in mm
B	Sensing range max. in mm
C	Field of view
D	Adjustable switching threshold for foreground suppression
E	Sensing range indicator
F	Teach-Turn adjustment

**SENSING RANGE DIAGRAM MODE 1 AND 6 COMBINED**

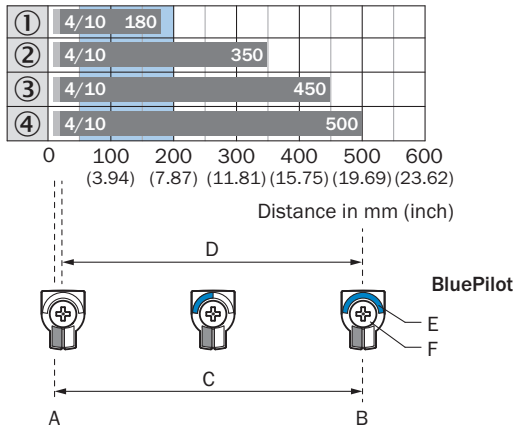


Recommended sensing range for the best performance

1	Ultra-black object, 1% remission factor
2	Black object, 6% remission factor
3	Gray object, 18% remission factor
4	White object, 90% remission factor
A	Sensing range min. in mm
B	Sensing range max. in mm
C	Field of view
D	Adjustable switching threshold for background suppression
E	Sensing range indicator

F

Teach-Turn adjustment


**SENSING RANGE DIAGRAM MODE 1, 3, 4, 5**

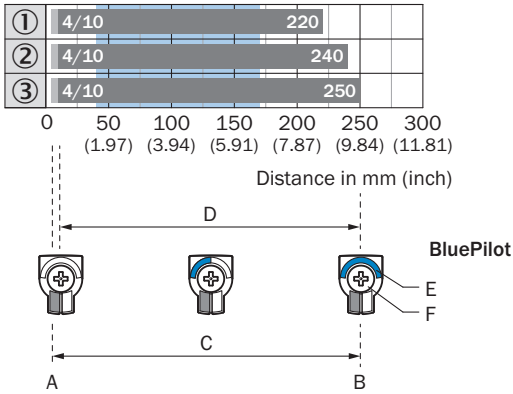

Recommended sensing range for the best performance

1	Black object, 6% remission factor
2	Gray object, 18% remission factor
3	White object, 90% remission factor
A	Sensing range min. in mm
B	Sensing range max. in mm
C	Field of view
D	Adjustable switching threshold for background suppression
E	Sensing range indicator
F	Teach-Turn adjustment

**DIMENSIONAL DRAWING, SENSOR**

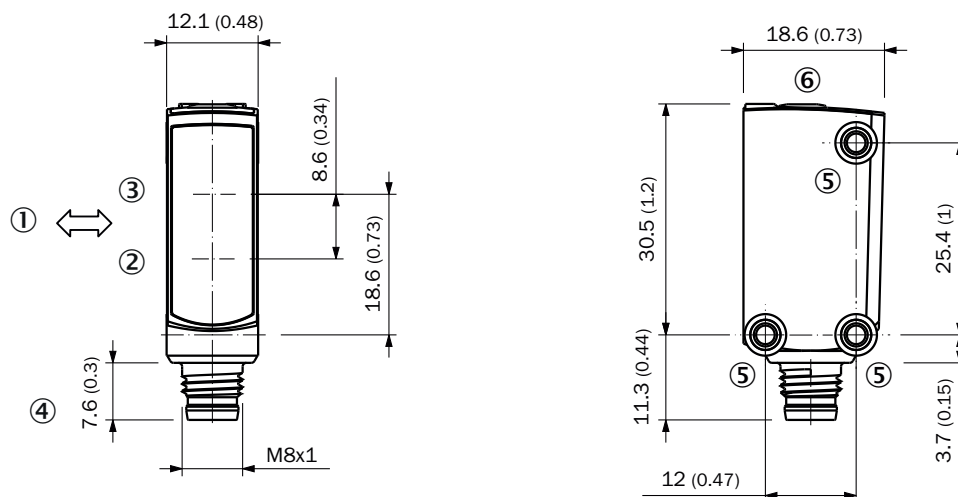

Dimensions in mm (inch)

- ① Standard direction of the material being detected
- ② Center of optical axis, receiver
- ③ Center of optical axis, sender
- ④ Connection
- ⑤ M3 mounting hole
- ⑥ display and adjustment elements

Further information as well as suitable accessories, example applications and downloads such as CAD dimensional models, operating instructions and software can be found at [www.sick.com/1131619](http://www.sick.com/1131619)



SICK AG  
WALDKIRCH  
GERMANY  
SICK.COM

# SICK AT A GLANCE

SICK is a leading global technology company for intelligent sensors and integrated solutions in industrial automation. Our technologies set benchmarks, making your industrial processes more efficient, safer and more sustainable – both in logistics and manufacturing operations.

SICK combines sensor intelligence with industry expertise and certified consulting services. We provide the ideal foundation for scalable as well as tailor-made automation solutions and create added value along the entire value chain. Our close partnerships with our customers are more than just a promise: Together, we optimize productivity, improve quality, protect health and safety, and help build a sustainable future. All with empathy and trust.

Since 1946, we have been developing innovative technologies with passion and a pioneering spirit. With a global network in around 40 countries, SICK has a global presence and is always close by. The company's headquarters are located in Waldkirch near Freiburg, Germany. Our customers benefit from our understanding of both local and global requirements, which enables us to deliver tailor-made solutions

**SICK**  
Sensor Intelligence