



DATA SHEET

LUT9U-P120L

LUT9
Luminescence sensors



Illustration may differ

LUMINESCENCE SENSORS

LUT9U-P120L

ORDERING INFORMATION

Type	part no.
LUT9U-P120L	1046188

Further device versions and accessories at www.sick.com/LUT9



DETAILED TECHNICAL DATA

FEATURES

Housing design	Large
Dimensions (W x H x D)	30.4 mm x 53 mm x 80 mm
Light source	LED, Ultraviolet light ¹⁾
Light emission	Long side
Light spot size	3 mm x 9 mm
Light spot direction	Vertical
Receiving filters	≤ 420 nm ²⁾
Wave length	375 nm
Working range	10 mm ... 40 mm
Sensing distance	20 mm ³⁾
Receiving range	450 nm ... 750 nm
Adjustment	Teach-in button, IO-Link (optional)
Output function	Light switching ⁴⁾

¹⁾ Average service life: 100,000 h at T_u = +25 °C.
²⁾ Filter blocks shorter wavelengths to blank out background luminescence.
³⁾ From leading edge of lens.
⁴⁾ L/D switching via teach-in or IO-Link.

INTERFACES

IO-Link	✓, IO-Link V1.0
VendorID	26
DeviceID HEX	80000F
DeviceID DEC	8388623
Cycle time	2.3 ms
Process data structure	Bit 0 = switching signal Q _L Bit 1 ... 5 = empty

Bit 6 ... 15 = Analog Measurement Value

ELECTRONICS

Supply voltage	10 V DC ... 30 V DC ¹⁾
Ripple	< 5 V _{pp} ²⁾
Current consumption	< 100 mA ³⁾
Switching frequency	0.5 kHz ⁴⁾ 2.5 kHz 6.5 kHz
Response time	1 ms 200 µs 75 µs
Switching output	PNP
Switching output (voltage)	PNP: HIGH = $U_v \leq 2 \text{ V}$ / LOW approx. 0 V
Switching mode	Light switching
Analog output	0 mA ... 13 mA
Output current I _{max}	100 mA
Time delay	Switch-off delay, 0 ms / 10 ms / 20 ms, adjustable (0 ms = default)
Protection class	II ⁵⁾
Circuit protection	U_v connections, reverse polarity protected Output Q short-circuit protected Interference pulse suppression
Connection type	Male connector M12, 4-pin

¹⁾ Limit values when operated in short-circuit protected network: max. 8 A.²⁾ May not fall below or exceed U_v tolerances.³⁾ Without load.⁴⁾ With light/dark ratio 1:1, without timer stage.⁵⁾ Reference voltage DC 50 V.**MECHANICS**

Housing material	Zinc diecast
Weight	400 g

AMBIENT DATA


Ambient operating temperature	-10 °C ... +55 °C
Ambient temperature, storage	-25 °C ... +75 °C
Shock load	According to IEC 60068
Enclosure rating	IP67

CERTIFICATES

EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
Moroccan declaration of conformity	✓
China RoHS	✓
China Compulsory Product Certification (CCC) exempt	✓


Photobiological safety (IEC EN 62471)	✓
Optical radiation safety (GB 44703:2024) declaration of manufacturer (low risk)	✓
Information according to Art. 3 of Data Act (Regulation EU 2023/2854)	✓

DIMENSIONAL DRAWING LUT9X-X1XXX, LIGHT EMISSION: LONG SIDE


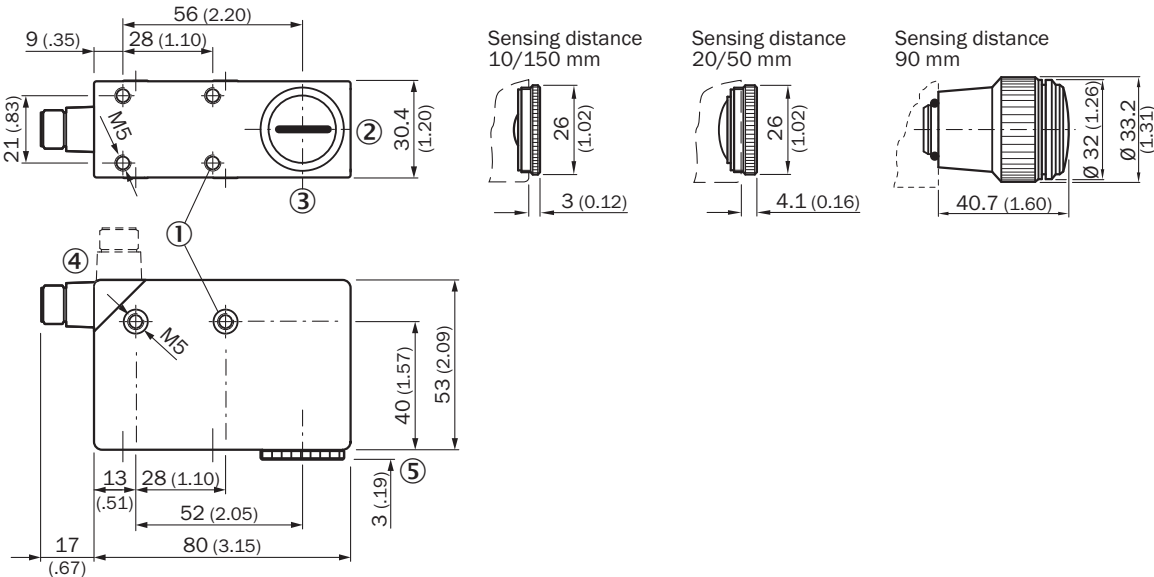


- Dimensions in mm (inch)
- ① M5 threaded mounting hole, 5.5 mm deep
 - ② Lens (light transmission), can be replaced by blind screw
 - ③ Center of optical axis
 - ④ Connector M12 (rotatable up to 90°)
 - ⑤ see dimensional drawings of lenses
 - ⑥ Blind screw can be replaced by lens


ADJUSTMENTS

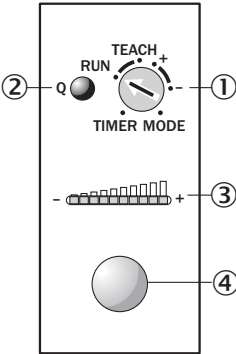


- ① Rotary selection switch
- ② Function signal indicator (yellow), switching output
- ③ bar graph (green), power-on left-hand LED
- ④ Teach-in button

CONNECTION DIAGRAM CD-309**CONCEPT OF OPERATION BUTTON +/-****1. Position mark**

Turn rotary switch to “+” position and press and hold teach-in button until yellow light goes out (more green LEDs illuminate on the bar display).


2. Position background

If yellow LED illuminates, turn rotary switch to “-” position and press and hold teach-in button until yellow light just goes out (green LEDs go out on the bar display).

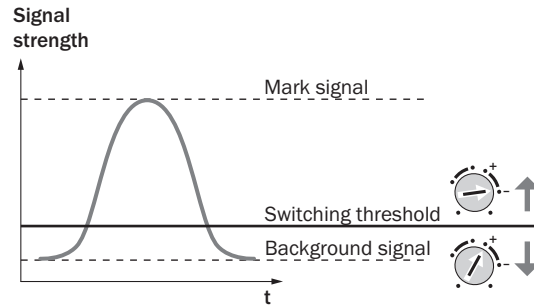
Sensitivity setting**Note for all settings**

Once configuration is complete, turn the rotary switch to the “RUN” position. The bar display then shows the luminescence intensity (regardless of switching threshold setting).


Adjustments are intended for luminescence background suppression.

CONCEPT OF OPERATION TEACH-IN STATIC**1. Position mark**

Turn rotary switch to “TEACH” position and press and hold teach-in button > 1 s. Yellow LED flashes slowly.


2. Position background

Press and hold teach-in button again > 1 s. Yellow LED goes out.

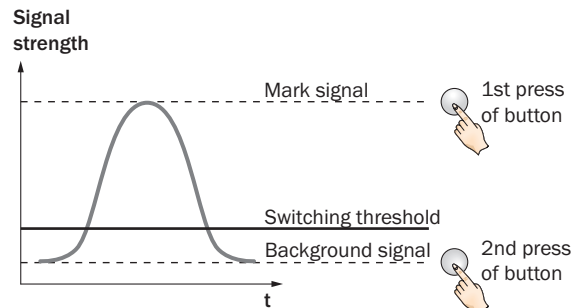Sensitivity setting**Note**

The bar graph display shows detection reliability. The more LEDs that illuminate, the better the teach-in.


SENSING DISTANCE

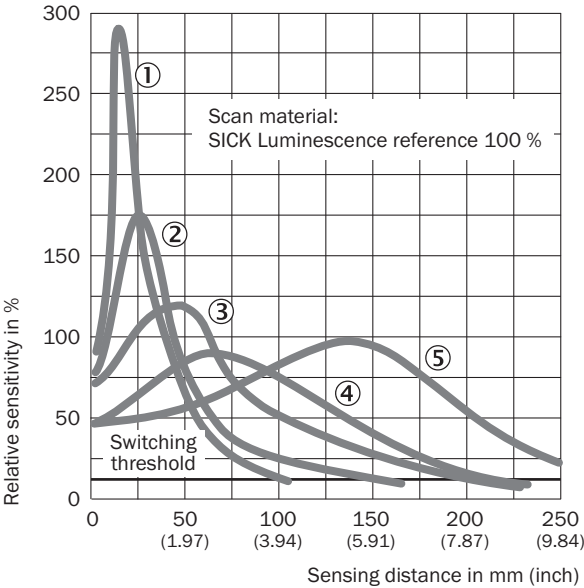


- ① Sensing distance 10 mm
- ② Sensing distance 20 mm
- ③ Sensing distance 50 mm
- ④ Sensing distance 90 mm
- ⑤ Sensing distance 150 mm

LIGHT SPOT SIZE


Sensing distance 10 mm




Sensing distance 20 mm




Sensing distance 50 mm



Sensing distance 90 mm



Sensing distance 150 mm



All dimensions in mm (inch)

Further information as well as suitable accessories, example applications and downloads such as CAD dimensional models, operating instructions and software can be found at www.sick.com/1046188



SICK AG
WALDKIRCH
GERMANY
SICK.COM

SICK AT A GLANCE

SICK is a leading global technology company for intelligent sensors and integrated solutions in industrial automation. Our technologies set benchmarks, making your industrial processes more efficient, safer and more sustainable – both in logistics and manufacturing operations.

SICK combines sensor intelligence with industry expertise and certified consulting services. We provide the ideal foundation for scalable as well as tailor-made automation solutions and create added value along the entire value chain. Our close partnerships with our customers are more than just a promise: Together, we optimize productivity, improve quality, protect health and safety, and help build a sustainable future. All with empathy and trust.

Since 1946, we have been developing innovative technologies with passion and a pioneering spirit. With a global network in around 40 countries, SICK has a global presence and is always close by. The company's headquarters are located in Waldkirch near Freiburg, Germany. Our customers benefit from our understanding of both local and global requirements, which enables us to deliver tailor-made solutions

SICK
Sensor Intelligence