



UE403-A0930

UE403

SYSTEM PLUGS AND EXTENSION MODULES

SICK
Sensor Intelligence.



Ordering information

Type	part no.
UE403-A0930	1026287

Other models and accessories → www.sick.com/UE403



Detailed technical data

Features

Application	Muting switching amplifier
Compatible sensor types	M4000 Advanced multiple light beam safety devices

Safety-related parameters

Type	Type 4 (IEC 61496-1)
Safety integrity level	SIL 3 (IEC 61508)
Category	Category 4 (EN ISO 13849)
Performance level	PL e (EN ISO 13849)
PFH_D (mean probability of a dangerous failure per hour)	1.0×10^{-8} (EN ISO 13849) ¹⁾
T_M (mission time)	18 years (EN ISO 13849) ¹⁾

¹⁾ Only in conjunction with M4000 Advanced, M4000 Advanced A/P and M4000 Advanced Curtain.

Functions

Concurrence monitoring	✓
Monitoring of total muting time	✓
Sensor gap monitoring	✓
Belt stop	✓
Muting with override	✓
Exit monitoring	✓
End of muting by ESPE	✓

Interfaces

Connection type	Female connector M12, 5-pin
Permitted cable length	≤ 10 m
Diagnostic display	LEDs

Electronics

Protection class	III (IEC 61140)
Supply voltage V_s	24 V DC (19.2 V DC ... 28.8 V DC) ¹⁾
Power consumption	≤ 2 A
Inputs: override, reset, C1, belt stop, muting sensors	
ON state, switching voltage HIGH	24 V DC (11 V DC ... 30 V DC)
OFF state, switching voltage LOW	0 V DC (-30 V DC ... 5 V DC)
Input current HIGH	6 mA ... 15 mA
Input current LOW	-0.5 mA ... 1.5 mA
Outputs: voltage supply for reset, override, C1	
Supply voltage	24 V DC (15 V DC ... 28.8 V DC)
Output current	≤ 400 mA ²⁾
Outputs: muting sensors	
Supply voltage	24 V DC (15 V DC ... 28.8 V DC)
Output current	≤ 500 mA ²⁾
Muting lamp	
Output current HIGH (monitored)	20 mA ... 400 mA ³⁾
Output current HIGH (not monitored)	0 mA ... 400 mA ³⁾

¹⁾ Via connected ESPE.

²⁾ Total of all supply currents from the connections RES/OVR, A1, A2, B1 and B2 (pin 1 in each case): max. 1000 mA.

³⁾ At max. 5 W power consumption.

Mechanics

Mounting	Flexible mounting on the M4000 Advanced or directly in the system
Dimensions (W x H x D)	76.5 mm x 225.2 mm x 40 mm
Housing material	Aluminum die cast, powder coated
Material, connector strip	Polyamide
Weight	600 g

Ambient data

Enclosure rating	IP65 (IEC 60529)
Ambient operating temperature	-30 °C ... +55 °C
Storage temperature	-30 °C ... +70 °C
Air humidity	15 % ... 95 %, Non-condensing
Vibration resistance	5 g, 10 Hz ... 55 Hz (EN 60068-2-6)
Shock resistance	10 g, 16 ms (IEC 60068-2-29)

Certificates


EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
Moroccan declaration of conformity	✓
China RoHS	✓

ULus approval	✓
cUL approval	✓
EC-Type-Examination approval	✓
Information according to Art. 3 of Data Act (Regulation EU 2023/2854)	✓

Classifications

ECLASS 5.0	27272790
ECLASS 5.1.4	27272790
ECLASS 6.0	27272790
ECLASS 6.2	27272790
ECLASS 7.0	27272790
ECLASS 8.0	27272790
ECLASS 8.1	27272790
ECLASS 9.0	27272792
ECLASS 10.0	27272792
ECLASS 11.0	27272792
ECLASS 12.0	27272792
ETIM 5.0	EC011349
ETIM 6.0	EC011349
ETIM 7.0	EC011349
ETIM 8.0	EC011349
UNSPSC 16.0901	41113704


Dimensional drawing UE403 muting switching amplifier

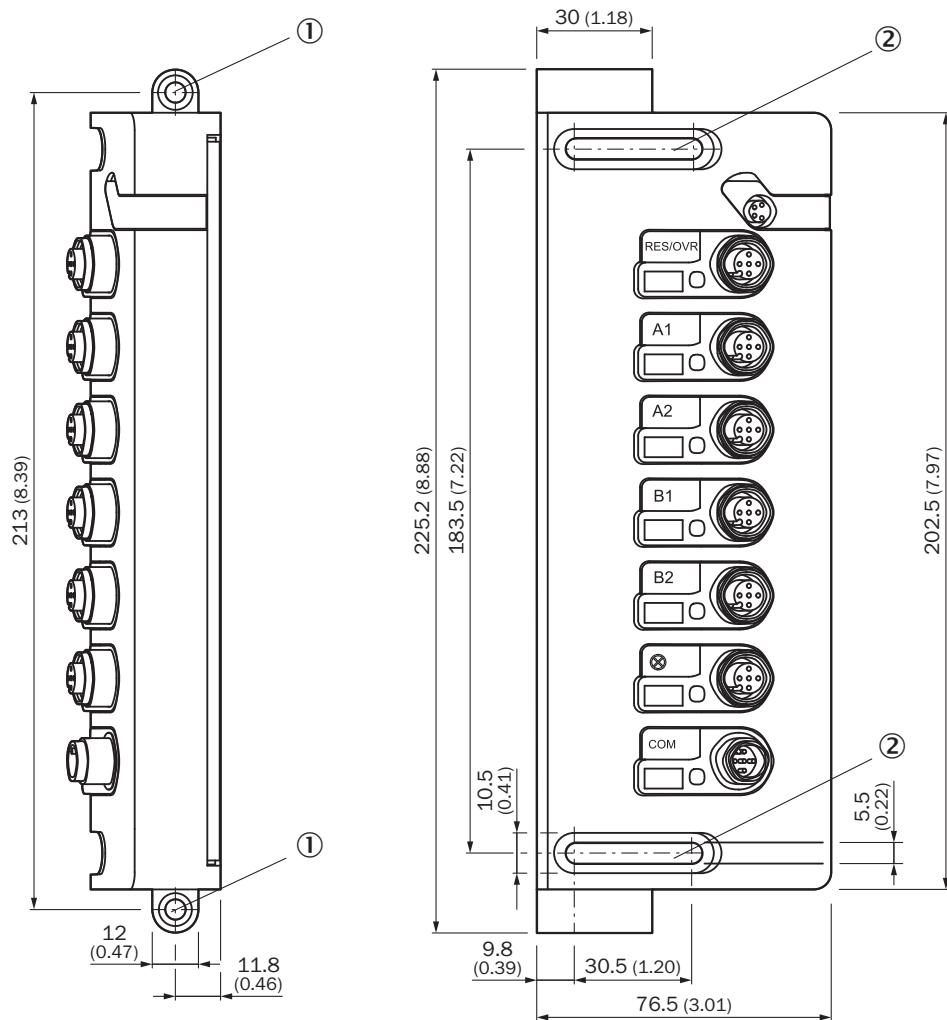

Note:

The fixing holes ① and slots ② are suitable for cheese head screws M5 x 30 as per DIN EN ISO 4762.

Dimensions in mm (inch)

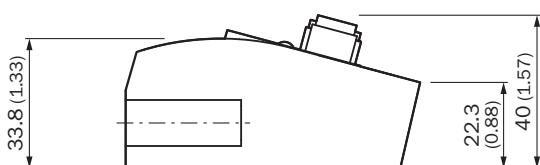

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations www.sick.com