



# DFS60S-SD0A01024


DFS60S Pro

SAFETY ENCODERS

**SICK**  
Sensor Intelligence.



Illustration may differ



## Ordering information

| Type             | part no. |
|------------------|----------|
| DFS60S-SDOA01024 | 1067910  |

Other models and accessories → [www.sick.com/DFS60S\\_Pro](http://www.sick.com/DFS60S_Pro)

## Detailed technical data

### Safety-related parameters

|                                                               |                                                     |
|---------------------------------------------------------------|-----------------------------------------------------|
| <b>Safety integrity level</b>                                 | SIL 2 (IEC 61508), SILCL2 (IEC 62061) <sup>1)</sup> |
| <b>Performance level</b>                                      | PL d (EN ISO 13849) <sup>1)</sup>                   |
| <b>Category</b>                                               | 3 (EN ISO 13849)                                    |
| <b>PFH (mean probability of a dangerous failure per hour)</b> | $1.7 \times 10^{-8}$ <sup>2)</sup>                  |
| <b>T<sub>M</sub> (mission time)</b>                           | 20 years (EN ISO 13849)                             |
| <b>Safety-related measuring step</b>                          | 0.09°, Quadrature analysis                          |
| <b>Safety-related accuracy</b>                                | ± 0.09°                                             |

<sup>1)</sup> For more detailed information on the exact configuration of your machine/unit, please consult your relevant SICK branch office.

<sup>2)</sup> The stated values apply to a diagnostic coverage of 99%, which must be achieved by the external drive system, and an operating temperature of 95 °C.

### Performance

|                                           |                                                                                   |
|-------------------------------------------|-----------------------------------------------------------------------------------|
| <b>Sine/cosine periods per revolution</b> | 1,024                                                                             |
| <b>Measuring step</b>                     | 0.3°, For interpolation of the sine/cosine signals with e.g. 12 bit <sup>1)</sup> |
| <b>Integral non-linearity</b>             | Typ. ± 45" (without mechanical tension of the stator coupling)                    |
| <b>Differential non-linearity</b>         | ± 7"                                                                              |

<sup>1)</sup> Not safety-related.

### Interfaces

|                                       |                       |
|---------------------------------------|-----------------------|
| <b>Communication interface</b>        | Incremental           |
| <b>Communication Interface detail</b> | Sin/Cos <sup>1)</sup> |
| <b>Number of signal channels</b>      | 6-channel             |

<sup>1)</sup> 1.0 V<sub>SS</sub> (differential).

<sup>2)</sup> Valid signals can be read once this time has elapsed.

|                            |                        |
|----------------------------|------------------------|
| <b>Initialization time</b> | 50 ms <sup>2)</sup>    |
| <b>Output frequency</b>    | ≤ 153.6 kHz            |
| <b>Power consumption</b>   | ≤ 0.7 W (without load) |
| <b>Load resistance</b>     | ≥ 120 Ω                |

<sup>1)</sup> 1.0 V<sub>SS</sub> (differential).

<sup>2)</sup> Valid signals can be read once this time has elapsed.

## Electronics

|                                                |                                                   |
|------------------------------------------------|---------------------------------------------------|
| <b>Connection type</b>                         | Male connector, M23, 12-pin, radial               |
| <b>Supply voltage</b>                          | 4.5 ... 32 V                                      |
| <b>Reference signal, number</b>                | 1                                                 |
| <b>Reference signal, position</b>              | 90°, electronically, gated with Sinus and Cosinus |
| <b>Reverse polarity protection</b>             | ✓                                                 |
| <b>Protection class</b>                        | III (according to DIN EN 61140)                   |
| <b>Short-circuit protection of the outputs</b> | ✓ <sup>1)</sup>                                   |

<sup>1)</sup> Short-circuit to another channel or GND permitted for max. 30 s. In the case of U<sub>S</sub> ≤ 12 V additional short-circuit to U<sub>S</sub> permitted for max. 30 s.

## Mechanics

|                                       |                                                 |
|---------------------------------------|-------------------------------------------------|
| <b>Mechanical design</b>              | Solid shaft, Servo flange                       |
| <b>Shaft diameter</b>                 | 6 mm<br>With feather key                        |
| <b>Shaft length</b>                   | 10 mm                                           |
| <b>Weight</b>                         | Approx. 0.3 kg <sup>1)</sup>                    |
| <b>Shaft material</b>                 | Stainless steel                                 |
| <b>Flange material</b>                | Aluminum                                        |
| <b>Housing material</b>               | Aluminum die cast                               |
| <b>Start up torque</b>                | ≤ 0.5 Ncm (+20 °C)                              |
| <b>Operating torque</b>               | ≤ 0.3 Ncm (+20 °C)                              |
| <b>Permissible shaft loading</b>      | 80 N (radial)<br>40 N (axial)                   |
| <b>Operating speed</b>                | ≤ 9,000 min <sup>-1</sup> <sup>2)</sup>         |
| <b>Moment of inertia of the rotor</b> | 8 gcm <sup>2</sup>                              |
| <b>Bearing lifetime</b>               | 3.6 x 10 <sup>9</sup> revolutions <sup>3)</sup> |
| <b>Angular acceleration</b>           | ≤ 500,000 rad/s <sup>2</sup>                    |

<sup>1)</sup> Based on encoder with male connector.

<sup>2)</sup> Allow for self-heating of approx. 3.0 K per 1,000 rpm regarding the permissible operating temperature.

<sup>3)</sup> On maximum operating speed and temperature.

## Ambient data

|                         |                                                           |
|-------------------------|-----------------------------------------------------------|
| <b>EMC</b>              | According to EN 61000-6-2, EN 61000-6-3 and IEC 61326-3-1 |
| <b>Enclosure rating</b> | IP65 (IEC 60529) <sup>1)</sup>                            |

<sup>1)</sup> With plug and mating plug fitted minimum IP65.

<sup>2)</sup> Allow for self-heating of approx. 3.0 K per 1,000 rpm regarding the permissible operating temperature.

<sup>3)</sup> Checked to operation with vector length monitoring.

|                                      |                                           |
|--------------------------------------|-------------------------------------------|
| <b>Permissible relative humidity</b> | 90 % (Condensation not permitted)         |
| <b>Operating temperature range</b>   | -30 °C ... +95 °C <sup>2)</sup>           |
| <b>Storage temperature range</b>     | -30 °C ... +85 °C, without package        |
| <b>Resistance to shocks</b>          | 100 g, 6 ms (EN 60068-2-27) <sup>3)</sup> |
| <b>Resistance to vibration</b>       | 10 g, 10 Hz ... 1,000 Hz (EN 60068-2-6)   |

<sup>1)</sup> With plug and mating plug fitted minimum IP65.

<sup>2)</sup> Allow for self-heating of approx. 3.0 K per 1,000 rpm regarding the permissible operating temperature.

<sup>3)</sup> Checked to operation with vector length monitoring.

## Certificates

|                                                                              |   |
|------------------------------------------------------------------------------|---|
| <b>EU declaration of conformity</b>                                          | ✓ |
| <b>UK declaration of conformity</b>                                          | ✓ |
| <b>ACMA declaration of conformity</b>                                        | ✓ |
| <b>Moroccan declaration of conformity</b>                                    | ✓ |
| <b>China RoHS</b>                                                            | ✓ |
| <b>cULus certificate</b>                                                     | ✓ |
| <b>EC-Type-Examination approval</b>                                          | ✓ |
| <b>Information according to Art. 3 of Data Act (Regulation EU 2023/2854)</b> | ✓ |

## Classifications

|                       |          |
|-----------------------|----------|
| <b>ECLASS 5.0</b>     | 27270501 |
| <b>ECLASS 5.1.4</b>   | 27270501 |
| <b>ECLASS 6.0</b>     | 27270590 |
| <b>ECLASS 6.2</b>     | 27270590 |
| <b>ECLASS 7.0</b>     | 27270501 |
| <b>ECLASS 8.0</b>     | 27270501 |
| <b>ECLASS 8.1</b>     | 27270501 |
| <b>ECLASS 9.0</b>     | 27270501 |
| <b>ECLASS 10.0</b>    | 27270501 |
| <b>ECLASS 11.0</b>    | 27270501 |
| <b>ECLASS 12.0</b>    | 27270501 |
| <b>ETIM 5.0</b>       | EC001486 |
| <b>ETIM 6.0</b>       | EC001486 |
| <b>ETIM 7.0</b>       | EC001486 |
| <b>ETIM 8.0</b>       | EC001486 |
| <b>UNSPSC 16.0901</b> | 41112113 |

Technical drawing of a mechanical part, showing multiple views and dimensions.

**Front View (Left):**

- Overall width:  $\varnothing 58 \pm 0.1$  (2.28)
- Inner width:  $\varnothing 51.5_{-0.2}^{+0.1}$  (2.03)
- Distance from center to feature B:  $\varnothing 50 f8$  (1.97)
- Distance from center to feature C:  $\varnothing 6 f7$  (0.24)
- Feature B:  $\varnothing 0.05$  B
- Feature C:  $\varnothing 0.1$  C
- Surface texture:  $\sqrt{0.1}$  A
- Feature A:  $\sqrt{0.03}$  A
- Feature X:  $10 \pm 0.3$  (0.39)
- Feature Y:  $10 \pm 0.3$  (0.39)
- Feature Z:  $9.5$  (0.37)
- Feature W:  $5.7$  (0.22)
- Feature V:  $43.1$  (1.70)
- Feature U:  $7.75$  (0.31)
- Feature T:  $14.5$  (0.57)
- Feature S:  $M12 \times 1$
- Feature R:  $M23 \times 1$
- Feature Q:  $26.1$  (1.03)
- Feature P:  $13$  (0.51)
- Feature O:  $2$  (0.08)
- Feature N:  $0.8$  (0.03)
- Feature M:  $5:1$

**Top View (Right):**

- Overall diameter:  $\varnothing 60$  (2.36)
- Distance from center to feature B:  $\varnothing 42 \pm 0.05$  (1.65)
- Feature B:  $\varnothing 0.1$  B
- Feature A:  $\sqrt{0.1}$  A
- Feature X:  $120^\circ$  (3X)
- Feature Y:  $25^\circ \pm 2^\circ$
- Feature Z:  $2 h9$  (0.08)
- Feature W:  $5$
- Feature V:  $Y$
- Feature U:  $10:1$

**Side View (Bottom):**

- Overall height:  $43.1$  (1.70)
- Feature U:  $7.75$  (0.31)
- Feature T:  $14.5$  (0.57)
- Feature S:  $M12 \times 1$
- Feature R:  $M23 \times 1$
- Feature Q:  $26.1$  (1.03)
- Feature P:  $13$  (0.51)
- Feature O:  $2$  (0.08)
- Feature N:  $0.8$  (0.03)
- Feature M:  $5:1$

**Detail Views:**


- Detail 1:  $\sqrt{0.1}$  A
- Detail 2:  $\sqrt{0.1}$  A
- Detail 3:  $\sqrt{0.1}$  A
- Detail 4:  $\sqrt{0.1}$  A
- Detail 5:  $\sqrt{0.1}$  A
- Detail 6:  $\sqrt{0.1}$  A
- Detail 7:  $\sqrt{0.1}$  A
- Detail 8:  $\sqrt{0.1}$  A
- Detail 9:  $\sqrt{0.1}$  A
- Detail 10:  $\sqrt{0.1}$  A
- Detail 11:  $\sqrt{0.1}$  A
- Detail 12:  $\sqrt{0.1}$  A
- Detail 13:  $\sqrt{0.1}$  A
- Detail 14:  $\sqrt{0.1}$  A
- Detail 15:  $\sqrt{0.1}$  A
- Detail 16:  $\sqrt{0.1}$  A
- Detail 17:  $\sqrt{0.1}$  A
- Detail 18:  $\sqrt{0.1}$  A
- Detail 19:  $\sqrt{0.1}$  A
- Detail 20:  $\sqrt{0.1}$  A
- Detail 21:  $\sqrt{0.1}$  A
- Detail 22:  $\sqrt{0.1}$  A
- Detail 23:  $\sqrt{0.1}$  A
- Detail 24:  $\sqrt{0.1}$  A
- Detail 25:  $\sqrt{0.1}$  A
- Detail 26:  $\sqrt{0.1}$  A
- Detail 27:  $\sqrt{0.1}$  A
- Detail 28:  $\sqrt{0.1}$  A
- Detail 29:  $\sqrt{0.1}$  A
- Detail 30:  $\sqrt{0.1}$  A
- Detail 31:  $\sqrt{0.1}$  A
- Detail 32:  $\sqrt{0.1}$  A
- Detail 33:  $\sqrt{0.1}$  A
- Detail 34:  $\sqrt{0.1}$  A
- Detail 35:  $\sqrt{0.1}$  A
- Detail 36:  $\sqrt{0.1}$  A
- Detail 37:  $\sqrt{0.1}$  A
- Detail 38:  $\sqrt{0.1}$  A
- Detail 39:  $\sqrt{0.1}$  A
- Detail 40:  $\sqrt{0.1}$  A
- Detail 41:  $\sqrt{0.1}$  A
- Detail 42:  $\sqrt{0.1}$  A
- Detail 43:  $\sqrt{0.1}$  A
- Detail 44:  $\sqrt{0.1}$  A
- Detail 45:  $\sqrt{0.1}$  A
- Detail 46:  $\sqrt{0.1}$  A
- Detail 47:  $\sqrt{0.1}$  A
- Detail 48:  $\sqrt{0.1}$  A
- Detail 49:  $\sqrt{0.1}$  A
- Detail 50:  $\sqrt{0.1}$  A
- Detail 51:  $\sqrt{0.1}$  A
- Detail 52:  $\sqrt{0.1}$  A
- Detail 53:  $\sqrt{0.1}$  A
- Detail 54:  $\sqrt{0.1}$  A
- Detail 55:  $\sqrt{0.1}$  A
- Detail 56:  $\sqrt{0.1}$  A
- Detail 57:  $\sqrt{0.1}$  A
- Detail 58:  $\sqrt{0.1}$  A
- Detail 59:  $\sqrt{0.1}$  A
- Detail 60:  $\sqrt{0.1}$  A
- Detail 61:  $\sqrt{0.1}$  A
- Detail 62:  $\sqrt{0.1}$  A
- Detail 63:  $\sqrt{0.1}$  A
- Detail 64:  $\sqrt{0.1}$  A
- Detail 65:  $\sqrt{0.1}$  A
- Detail 66:  $\sqrt{0.1}$  A
- Detail 67:  $\sqrt{0.1}$  A
- Detail 68:  $\sqrt{0.1}$  A
- Detail 69:  $\sqrt{0.1}$  A
- Detail 70:  $\sqrt{0.1}$  A
- Detail 71:  $\sqrt{0.1}$  A
- Detail 72:  $\sqrt{0.1}$  A
- Detail 73:  $\sqrt{0.1}$  A
- Detail 74:  $\sqrt{0.1}$  A
- Detail 75:  $\sqrt{0.1}$  A
- Detail 76:  $\sqrt{0.1}$  A
- Detail 77:  $\sqrt{0.1}$  A
- Detail 78:  $\sqrt{0.1}$  A
- Detail 79:  $\sqrt{0.1}$  A
- Detail 80:  $\sqrt{0.1}$  A
- Detail 81:  $\sqrt{0.1}$  A
- Detail 82:  $\sqrt{0.1}$  A
- Detail 83:  $\sqrt{0.1}$  A
- Detail 84:  $\sqrt{0.1}$  A
- Detail 85:  $\sqrt{0.1}$  A
- Detail 86:  $\sqrt{0.1}$  A
- Detail 87:  $\sqrt{0.1}$  A
- Detail 88:  $\sqrt{0.1}$  A
- Detail 89:  $\sqrt{0.1}$  A
- Detail 90:  $\sqrt{0.1}$  A
- Detail 91:  $\sqrt{0.1}$  A
- Detail 92:  $\sqrt{0.1}$  A
- Detail 93:  $\sqrt{0.1}$  A
- Detail 94:  $\sqrt{0.1}$  A
- Detail 95:  $\sqrt{0.1}$  A
- Detail 96:  $\sqrt{0.1}$  A
- Detail 97:  $\sqrt{0.1}$  A
- Detail 98:  $\sqrt{0.1}$  A
- Detail 99:  $\sqrt{0.1}$  A
- Detail 100:  $\sqrt{0.1}$  A

⑤ Key

Technical drawing of a circular part. The drawing shows concentric circles representing different diameters. A feature is indicated by a symbol consisting of a circle with a cross, repeated four times around the circle, with a dimension line indicating a 90-degree angle. The overall diameter is dimensioned as  $\varnothing 71 (2.80)$ .

part no. 2029165


Mounting requirements for small servo clamp

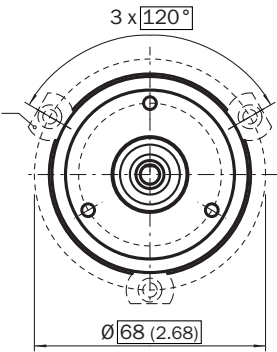

All dimensions in mm (inch)

part no. 2029166


PIN assignment



view of M23 male device connector on encoder

| PINMale connec-<br>tor M12, 8-pin | PINMale connec-<br>tor M23, 12-pin | Wire colors (ca-<br>ble connection) | Signal         | Explanation                                                                                                                            |
|-----------------------------------|------------------------------------|-------------------------------------|----------------|----------------------------------------------------------------------------------------------------------------------------------------|
| 1                                 | 6                                  | Brown                               | - COS          | Signal wire                                                                                                                            |
| 2                                 | 5                                  | White                               | + COS          | Signal wire                                                                                                                            |
| 3                                 | 1                                  | Black                               | - SIN          | Signal wire                                                                                                                            |
| 4                                 | 8                                  | Pink                                | + SIN          | Signal wire                                                                                                                            |
| 5                                 | 4                                  | Yellow                              | Z <sup>-</sup> | Signal (do not use for<br>safety operating mode)                                                                                       |
| 6                                 | 3                                  | Violet                              | Z              | Signal (do not use for<br>safety operating mode)                                                                                       |
| 7                                 | 10                                 | Blue                                | GND            | Ground connection                                                                                                                      |
| 8                                 | 12                                 | Red                                 | U <sub>S</sub> | Supply voltage (volt-<br>free to housing)                                                                                              |
| -                                 | 9                                  | -                                   | N.C.           | Not assigned                                                                                                                           |
| -                                 | 2                                  | -                                   | N.C.           | Not assigned                                                                                                                           |
| -                                 | 11                                 | -                                   | N.C.           | Not assigned                                                                                                                           |
| -                                 | 7                                  | -                                   | N.C.           | Not assigned                                                                                                                           |
| Screen                            | Screen                             | Screen                              | Screen         | Screen connected to en-<br>coder housingScreen con-<br>nected to housing on en-<br>coder side. Connected to<br>ground on control side. |


Diagrams Signal SIN/COS after differential generation

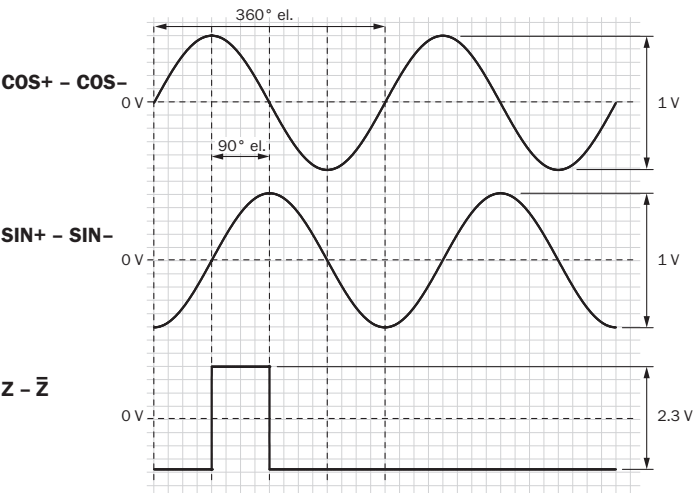

For clockwise shaft rotation, looking in direction “A” (see dimensional drawing)

| Supply voltage  | Output                      |
|-----------------|-----------------------------|
| 4,5 V ... 5,5 V | Sin/Cos 1.0 V <sub>pp</sub> |

Diagrams Signal SIN/COS before differential generation

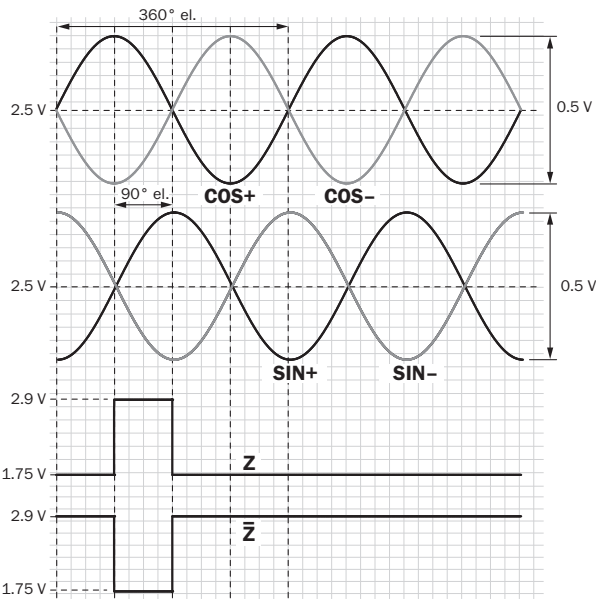

For clockwise shaft rotation, looking in direction “A” (see dimensional drawing)

| Signal               | Interface signals    | Signal before differential generationAt load 120 Ω | Signal offset |
|----------------------|----------------------|----------------------------------------------------|---------------|
| + SIN- SIN+ COS- COS | Analog, differential | 0,5 V <sub>SS</sub> ± 20 %                         | 2,5 V ± 10 %  |
| ZZ_                  | Digital differential | Low: 1,75 V ± 15 %,<br>High: 2,90 V ± 15 %         | –             |

Recommended accessories

Other models and accessories → [www.sick.com/DFS60S\\_Pro](http://www.sick.com/DFS60S_Pro)

|                                                                                   | Brief description                                                                                                                                                                                                                 | Type         | part no. |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|----------|
| Mounting systems                                                                  |                                                                                                                                                                                                                                   |              |          |
|  | <ul style="list-style-type: none"><li><b>Description:</b> Half-shell servo clamps (2 pcs.) for servo flanges with a 50 mm centering hub</li></ul>                                                                                 | BEF-WG-SF050 | 2029165  |
|  | <ul style="list-style-type: none"><li><b>Description:</b> Servo clamps, large, for servo flange (clamps, eccentric fastener), 3 pcs, without mounting material</li><li><b>Items supplied:</b> Without mounting hardware</li></ul> | BEF-WK-SF    | 2029166  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

**For us, that is “Sensor Intelligence.”**

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)