


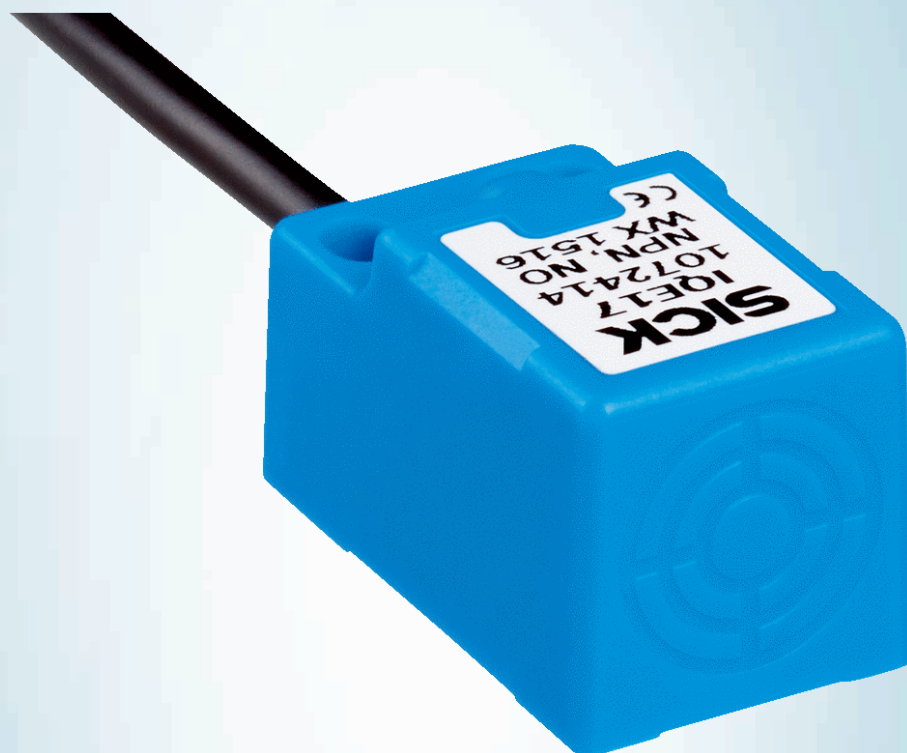


# IQE17-05NNOKW3S

IQE

INDUCTIVE PROXIMITY SENSORS


**SICK**  
Sensor Intelligence.



## Ordering information

| Type            | part no. |
|-----------------|----------|
| IQE17-05NNOKW3S | 1084126  |

Other models and accessories → [www.sick.com/IQE](http://www.sick.com/IQE)



## Detailed technical data

### Features

|                                            |                         |
|--------------------------------------------|-------------------------|
| <b>Housing</b>                             | Rectangular             |
| <b>Dimensions (W x H x D)</b>              | 17 mm x 17 mm x 29.5 mm |
| <b>Sensing range <math>S_n</math></b>      | 5 mm                    |
| <b>Safe sensing range <math>S_a</math></b> | 4.05 mm                 |
| <b>Installation type</b>                   | Non-flush               |
| <b>Switching frequency</b>                 | 1,000 Hz                |
| <b>Connection type</b>                     | Cable, 3-wire, 3 m      |
| <b>Switching output</b>                    | NPN                     |
| <b>Switching output detail</b>             | NPN                     |
| <b>Output function</b>                     | NC                      |
| <b>Electrical wiring</b>                   | DC 3-wire               |
| <b>Enclosure rating</b>                    | IP67 <sup>1)</sup>      |

<sup>1)</sup> According to EN 60529.

### Mechanics/electronics

|                                                |                           |
|------------------------------------------------|---------------------------|
| <b>Supply voltage</b>                          | 10 V DC ... 30 V DC       |
| <b>Ripple</b>                                  | ≤ 10 %                    |
| <b>Voltage drop</b>                            | ≤ 2 V                     |
| <b>Time delay before availability</b>          | ≤ 100 ms                  |
| <b>Hysteresis</b>                              | 5 % ... 15 %              |
| <b>Reproducibility</b>                         | ≤ 2 %                     |
| <b>Temperature drift (of <math>S_n</math>)</b> | ± 10 %                    |
| <b>EMC</b>                                     | According to EN 60947-5-2 |
| <b>Continuous current <math>I_a</math></b>     | ≤ 200 mA                  |
| <b>No load current</b>                         | 10 mA                     |
| <b>Cable material</b>                          | PVC                       |
| <b>Short-circuit protection</b>                | ✓                         |

|                                      |                   |
|--------------------------------------|-------------------|
| <b>Power-up pulse protection</b>     | ✓                 |
| <b>Ambient operating temperature</b> | -25 °C ... +75 °C |
| <b>Housing material</b>              | Plastic           |
| <b>Tightening torque, max.</b>       | 0.9 Nm            |
| <b>UL File No.</b>                   | E348498           |

#### Safety-related parameters

|                                     |             |
|-------------------------------------|-------------|
| <b>MTTF<sub>D</sub></b>             | 1,862 years |
| <b>DC<sub>avg</sub></b>             | 0 %         |
| <b>T<sub>M</sub> (mission time)</b> | 20 years    |

#### Reduction factors

|                                   |                                                |
|-----------------------------------|------------------------------------------------|
| <b>Note</b>                       | The values are reference values which may vary |
| <b>St37 steel (Fe)</b>            | 1                                              |
| <b>Stainless steel (V2A, 304)</b> | Typ. 0.7                                       |
| <b>Aluminum (Al)</b>              | Typ. 0.43                                      |
| <b>Copper (Cu)</b>                | Typ. 0.3                                       |
| <b>Brass (Br)</b>                 | Typ. 0.4                                       |

#### Installation note

|               |                                       |
|---------------|---------------------------------------|
| <b>Remark</b> | Associated graphic see "Installation" |
| <b>A</b>      | 17 mm                                 |
| <b>B</b>      | 34 mm                                 |
| <b>C</b>      | 17 mm                                 |
| <b>D</b>      | 15 mm                                 |
| <b>E</b>      | 10 mm                                 |
| <b>F</b>      | 40 mm                                 |
| <b>G</b>      | 25.5 mm                               |

#### Certificates



|                                           |   |
|-------------------------------------------|---|
| <b>EU declaration of conformity</b>       | ✓ |
| <b>UK declaration of conformity</b>       | ✓ |
| <b>ACMA declaration of conformity</b>     | ✓ |
| <b>Moroccan declaration of conformity</b> | ✓ |
| <b>China RoHS</b>                         | ✓ |
| <b>cULus certificate</b>                  | ✓ |

#### Classifications


|                     |          |
|---------------------|----------|
| <b>ECLASS 5.0</b>   | 27270101 |
| <b>ECLASS 5.1.4</b> | 27270101 |
| <b>ECLASS 6.0</b>   | 27270101 |
| <b>ECLASS 6.2</b>   | 27270101 |
| <b>ECLASS 7.0</b>   | 27270101 |
| <b>ECLASS 8.0</b>   | 27270101 |
| <b>ECLASS 8.1</b>   | 27270101 |

|                       |          |
|-----------------------|----------|
| <b>ECLASS 9.0</b>     | 27270101 |
| <b>ECLASS 10.0</b>    | 27270101 |
| <b>ECLASS 11.0</b>    | 27270101 |
| <b>ECLASS 12.0</b>    | 27274001 |
| <b>ETIM 5.0</b>       | EC002714 |
| <b>ETIM 6.0</b>       | EC002714 |
| <b>ETIM 7.0</b>       | EC002714 |
| <b>ETIM 8.0</b>       | EC002714 |
| <b>UNSPSC 16.0901</b> | 39122230 |


## Installation note

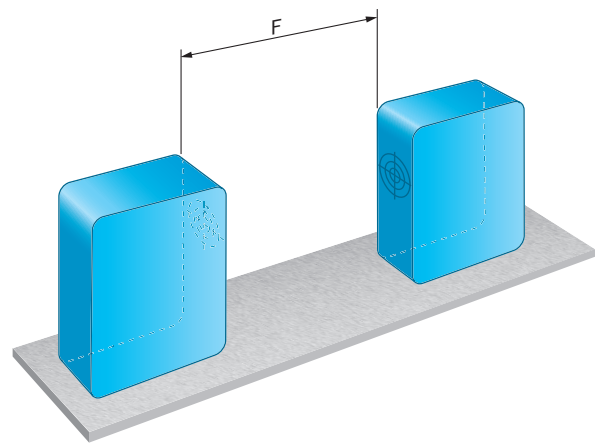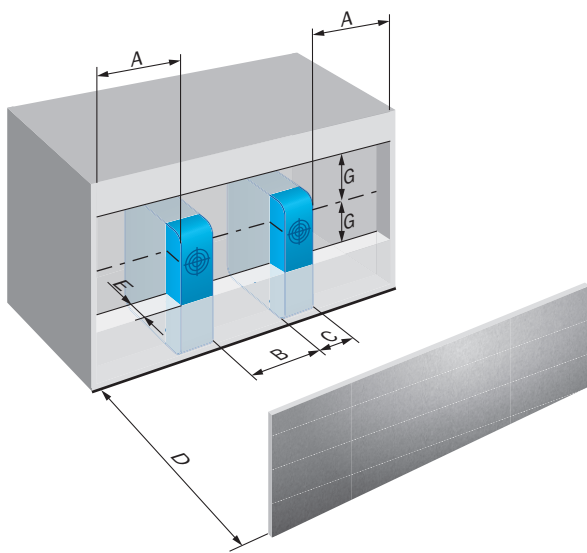

## Connection diagram Cd-003



## Dimensional drawing

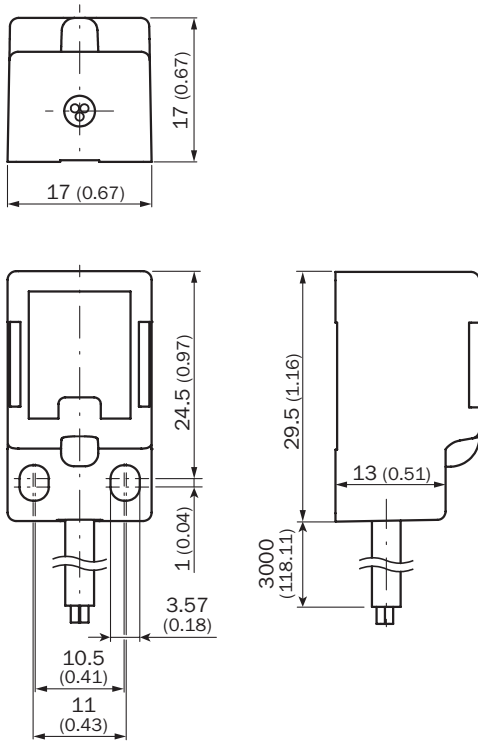

Dimensions in mm (inch)

## Recommended accessories

Other models and accessories → [www.sick.com/IQE](http://www.sick.com/IQE)

|                                                                                     | Brief description                                                                                                                                                                                                                                                                                | Type       | part no. |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------|
| connectors and cables                                                               |                                                                                                                                                                                                                                                                                                  |            |          |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Male connector, M12, 4-pin, straight, A-coded</li> <li><b>Description:</b> Unshielded</li> <li><b>Connection systems:</b> Screw-type terminals</li> <li><b>Permitted cross-section:</b> ≤ 0.75 mm<sup>2</sup></li> </ul>   | STE-1204-G | 6009932  |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Male connector, M12, 4-pin, angled, A-coded</li> <li><b>Description:</b> Unshielded</li> <li><b>Connection systems:</b> Screw-type terminals</li> <li><b>Permitted cross-section:</b> ≤ 0.75 mm<sup>2</sup></li> </ul>     | STE-1204-W | 6022084  |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 4-pin, straight, A-coded</li> <li><b>Description:</b> Unshielded</li> <li><b>Connection systems:</b> Screw-type terminals</li> <li><b>Permitted cross-section:</b> ≤ 0.75 mm<sup>2</sup></li> </ul> | DOS-1204-G | 6007302  |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 4-pin, angled, A-coded</li> <li><b>Description:</b> Unshielded</li> <li><b>Connection systems:</b> Screw-type terminals</li> <li><b>Permitted cross-section:</b> ≤ 0.75 mm<sup>2</sup></li> </ul>   | DOS-1204-W | 6007303  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

**For us, that is “Sensor Intelligence.”**

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)