



GTE20G-1IRC1170ZZZ

G20

PHOTOELECTRIC SENSORS

SICK
Sensor Intelligence.




Ordering information

Type	part no.
GTE20G-1IRC1170ZZZ	1120835

Other models and accessories → www.sick.com/G20

Illustration may differ

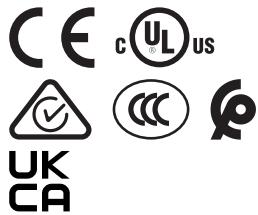

Detailed technical data

Features

Functional principle	Photoelectric proximity sensor
Functional principle detail	Energetic
Sensing range	
Sensing range min.	0.02 m
Sensing range max.	2 m
Reference object	Object with 90% remission factor (complies with standard white according to DIN 5033)
Emitted beam	
Light source	LED
Type of light	Visible red light
Shape of light spot	Rectangular
Light spot size (distance)	Ø 28 mm (500 mm)
Maximum dispersion of the emitted beam around the standardized transmission axis (squint angle)	< +/- 1.5° (at Ta = +23 °C)
Key LED figures	
Normative reference	EN 62471:2008-09 IEC 62471:2006, modified
LED risk group marking	Free group
Wave length	630 nm
Average service life	100,000 h at Ta = +25 °C
Adjustment	
Potentiometer	For sensitivity adjustment, 270°
Display	
LED green	Operating indicator

LED yellow	Static on: power on Status of received light beam Static on: object present Static off: object not present
------------	---

Electronics

Supply voltage U_e	24 V AC/DC ... 240 V AC/DC ¹⁾																			
Ripple	< 10 %																			
Usage category	DC-13 (according to EN 60947-1) AC-15 (according to EN 60947-1)																			
Current consumption	≤ 10 mA, Without load At 230 V AC/DC ≤ 45 mA, Without load At 24 V AC/DC																			
Protection class	II																			
Digital output	<table border="1"> <tr> <td>Number</td> <td>2 (Complementary)</td> </tr> <tr> <td>Type</td> <td>Relay, SPDT, electrically isolated ²⁾</td> </tr> <tr> <td>Switching mode</td> <td>Light/dark switching</td> </tr> <tr> <td>Output current $I_{max.}$</td> <td> <table border="1"> <tr> <td>4 A@250 V AC, 4 A@24 VDC, 0.11 A@250 V DC</td> </tr> <tr> <td>UL: 4 A@250 V AC, general use</td> </tr> <tr> <td>4 A @ 250 V AC, resistive (NO)</td> </tr> <tr> <td>3 A @ 250 V AC, resistive (NC)</td> </tr> <tr> <td>4 A @ 24 V DC, NO, general use</td> </tr> <tr> <td>3 A @ 24 V DC, NC, general use</td> </tr> <tr> <td>R300/B300 (NO contacts only)</td> </tr> </table> </td> </tr> <tr> <td>Response time</td> <td>≤ 15 ms</td> </tr> <tr> <td>Switching frequency</td> <td>10 Hz ³⁾</td> </tr> </table>	Number	2 (Complementary)	Type	Relay, SPDT, electrically isolated ²⁾	Switching mode	Light/dark switching	Output current $I_{max.}$	<table border="1"> <tr> <td>4 A@250 V AC, 4 A@24 VDC, 0.11 A@250 V DC</td> </tr> <tr> <td>UL: 4 A@250 V AC, general use</td> </tr> <tr> <td>4 A @ 250 V AC, resistive (NO)</td> </tr> <tr> <td>3 A @ 250 V AC, resistive (NC)</td> </tr> <tr> <td>4 A @ 24 V DC, NO, general use</td> </tr> <tr> <td>3 A @ 24 V DC, NC, general use</td> </tr> <tr> <td>R300/B300 (NO contacts only)</td> </tr> </table>	4 A@250 V AC, 4 A@24 VDC, 0.11 A@250 V DC	UL: 4 A@250 V AC, general use	4 A @ 250 V AC, resistive (NO)	3 A @ 250 V AC, resistive (NC)	4 A @ 24 V DC, NO, general use	3 A @ 24 V DC, NC, general use	R300/B300 (NO contacts only)	Response time	≤ 15 ms	Switching frequency	10 Hz ³⁾
Number	2 (Complementary)																			
Type	Relay, SPDT, electrically isolated ²⁾																			
Switching mode	Light/dark switching																			
Output current $I_{max.}$	<table border="1"> <tr> <td>4 A@250 V AC, 4 A@24 VDC, 0.11 A@250 V DC</td> </tr> <tr> <td>UL: 4 A@250 V AC, general use</td> </tr> <tr> <td>4 A @ 250 V AC, resistive (NO)</td> </tr> <tr> <td>3 A @ 250 V AC, resistive (NC)</td> </tr> <tr> <td>4 A @ 24 V DC, NO, general use</td> </tr> <tr> <td>3 A @ 24 V DC, NC, general use</td> </tr> <tr> <td>R300/B300 (NO contacts only)</td> </tr> </table>	4 A@250 V AC, 4 A@24 VDC, 0.11 A@250 V DC	UL: 4 A@250 V AC, general use	4 A @ 250 V AC, resistive (NO)	3 A @ 250 V AC, resistive (NC)	4 A @ 24 V DC, NO, general use	3 A @ 24 V DC, NC, general use	R300/B300 (NO contacts only)												
4 A@250 V AC, 4 A@24 VDC, 0.11 A@250 V DC																				
UL: 4 A@250 V AC, general use																				
4 A @ 250 V AC, resistive (NO)																				
3 A @ 250 V AC, resistive (NC)																				
4 A @ 24 V DC, NO, general use																				
3 A @ 24 V DC, NC, general use																				
R300/B300 (NO contacts only)																				
Response time	≤ 15 ms																			
Switching frequency	10 Hz ³⁾																			
Pin/Wire assignment	<table border="1"> <tr> <td>BN</td> <td>L/(+)</td> </tr> <tr> <td>BU</td> <td>N/(-)</td> </tr> <tr> <td>WH</td> <td>Relay COM</td> </tr> <tr> <td>BK</td> <td>Relay NO Relay output, light switching, object present → output HIGH</td> </tr> <tr> <td>GY</td> <td>Relay NC Relay output, dark switching, object present → output LOW</td> </tr> </table>	BN	L/(+)	BU	N/(-)	WH	Relay COM	BK	Relay NO Relay output, light switching, object present → output HIGH	GY	Relay NC Relay output, dark switching, object present → output LOW									
BN	L/(+)																			
BU	N/(-)																			
WH	Relay COM																			
BK	Relay NO Relay output, light switching, object present → output HIGH																			
GY	Relay NC Relay output, dark switching, object present → output LOW																			

¹⁾ +/- 10 %.²⁾ Valid only for devices manufactured before June 18, 2023 with a date code of 2324 or earlier. Suitable arc suppression with inductive or capacitive load. Relay contacts are separated from the supply voltage by a base insulation of 3.2 mm. Depending on the application, additional insulation may be required in the user wiring.³⁾ With light/dark ratio 1:1.

Mechanics

Housing	Rectangular
Dimensions (W x H x D)	23.5 mm x 74.5 mm x 63 mm
Connection	Cable, 5-wire, 2 m
Connection detail	
Deep-freeze property	Do not bend below 0 °C
Conductor size	0.32 mm ²
Cable diameter	Ø 5 mm

Material	Length of cable (L)	2 m
	Housing	Plastic, ABS
	Front screen	Plastic, PMMA
	Cable	Plastic, PVC
Weight	Approx. 153 g	

Ambient data

Enclosure rating	IP67 (EN 60529)
Ambient operating temperature	-30 °C ... +60 °C ¹⁾
Ambient temperature, storage	-40 °C ... +70 °C
Typ. Ambient light immunity	Sunlight: ≤ 20,000 lx
Shock resistance	30 g, 11 ms (3 positive and 3 negative shocks along X, Y, Z axes, 18 total shocks (EN60068-2-27))
Vibration resistance	10 Hz ... 1,000 Hz (Amplitude 1 mm, 3 x 30 min (EN60068-2-6))
Air humidity	35 % ... 95 %, relative humidity (no condensation)
Electromagnetic compatibility (EMC)	EN 60947-5-2, EN 61000-6-3
UL File No.	NRKH.E348498 & NRKH7.E348498

¹⁾ The max. ambient temperature is 50 °C (UL).

Certificates


EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
Moroccan declaration of conformity	✓
China RoHS	✓
CCC certificate	✓
cULus certificate	✓
Photobiological safety (IEC EN 62471)	✓

Classifications

ECLASS 5.0	27270904
ECLASS 5.1.4	27270904
ECLASS 6.0	27270904
ECLASS 6.2	27270904
ECLASS 7.0	27270904
ECLASS 8.0	27270904
ECLASS 8.1	27270904
ECLASS 9.0	27270904
ECLASS 10.0	27270904
ECLASS 11.0	27270904
ECLASS 12.0	27270903
ETIM 5.0	EC002719
ETIM 6.0	EC002719


ETIM 7.0	EC002719
ETIM 8.0	EC002719
UNSPSC 16.0901	39121528

display and adjustment elements

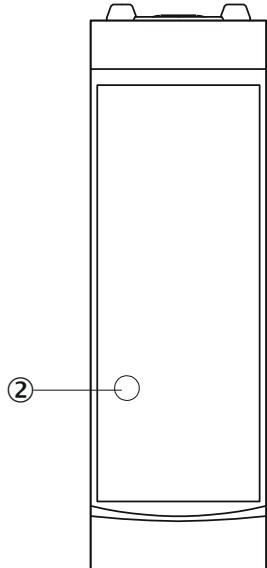


② LED yellow

display and adjustment elements

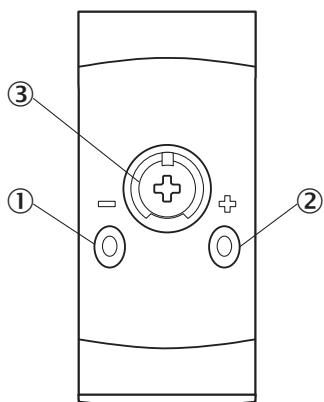


① LED green
② LED yellow
③ Potentiometer

Connection type Cable, 5-wire




Connection diagram Cd-163



Characteristic curve


Operating reserve

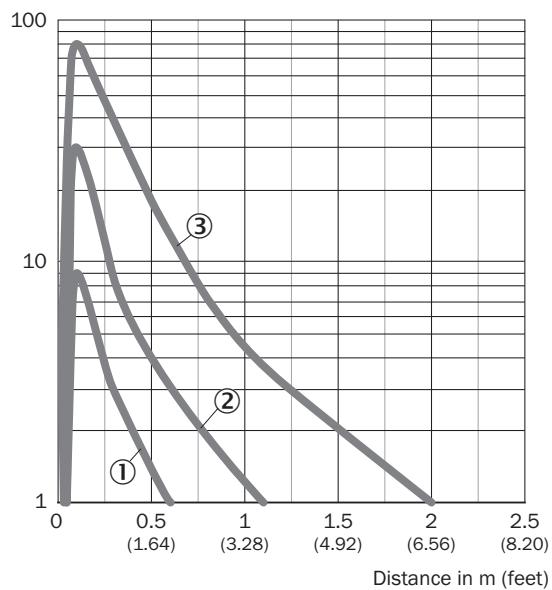


- ① Black object, 6% remission factor
- ② Gray object, 18% remission factor
- ③ White object, 90% remission factor

Light spot size

Dimensions in mm (inch)

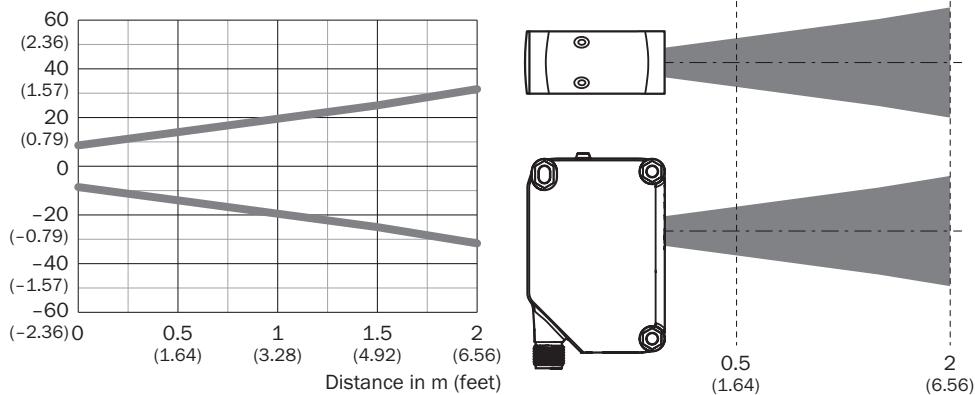


Sensing range diagram

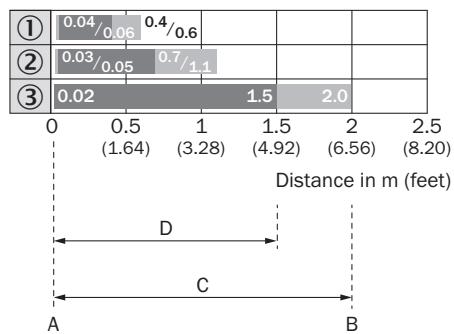

1		Black object, 6% remission factor
2		Gray object, 18% remission factor
3		White object, 90% remission factor
A		Sensing range min. in m
B		Sensing range max. in m
C		Maximum distance range from sensor to object
D		Recommended distance range from sensor to object

Dimensional drawing

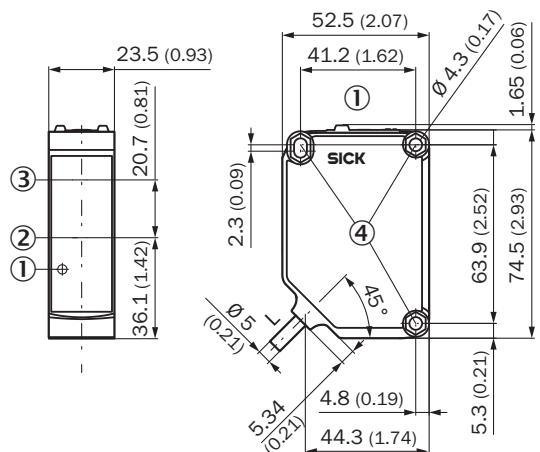

Dimensions in mm (inch)

For length of cable (L), see technical data

① display and adjustment elements

② Center of optical axis, sender

③ Center of optical axis, receiver

④ Fixing hole ø 4.3 mm, both sides for hexagon nut M4

Recommended accessories

Other models and accessories → www.sick.com/G20

	Brief description	Type	part no.
Mounting systems			
	<ul style="list-style-type: none"> Description: Mounting bracket Material: Stainless steel Details: Stainless steel V2A (1.4301) Items supplied: 2 screws, 2 nuts, 2 circlips, 2 washers for mounting the sensor Suitable for: W280-2, G20 	BEF-W280	5313885
connectors and cables			
	<ul style="list-style-type: none"> Connection type head A: Male connector, M12, 5-pin, straight, A-coded Description: Unshielded Connection systems: Screw-type terminals Permitted cross-section: ≤ 0.75 mm² Note: For field bus technology 	STE-1205-G	6022083

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations www.sick.com