



V2D8505R-1MCXXXAF0SXXXX

Lector85x

IMAGE-BASED CODE READERS

SICK
Sensor Intelligence.



Ordering information

| Type | part no. |
|-------------------------|----------|
| V2D8505R-1MCXXXAF0SXXXX | 1134614 |

Other models and accessories → www.sick.com/Lector85x



Detailed technical data

Features

| | |
|---------------------------|---|
| Application | Indoor area |
| Variant | Main unit |
| Optical focus | Adjustable focus (manual) |
| Sensor | CMOS monochrome |
| Sensor resolution | 2,464 px x 2,048 px (5 MP) |
| Illumination | To be ordered separately as accessories |
| Feedback spot | LED, Visible, green, 530 nm, ± 15 nm LED, Visible, Red, 660 nm, ± 20 nm |
| Alignment aid | Laser, Red, 630 nm ... 680 nm |
| Laser class | 1, complies with 21 CFR 1040.10 except for the conformance according to "Laser Notice No. 56" from May 8, 2019 (EN 60825-1:2014+A11:2021, IEC 60825-1:2014) |
| Lens | C-mount |
| Optical format | 1/1.8" |
| Focal length | 8 mm, 12 mm, 16 mm, 25 mm |
| Note | To be ordered separately as accessories |
| Scanning frequency | 30 Hz, With resolution of 5 megapixels |
| Code resolution | ≥ 0.1 mm ¹⁾ |
| Working range | 500 mm ... 3,000 mm ¹⁾ |

¹⁾ Depends on lens used.

Mechanics/electronics

| | |
|-------------------------------|---|
| Connection type | 1 x M12 ,17-pin male connector, A-coded (power, CAN, serial interface, I/O) 1 x M12, 5-pin female connector, A-coded (power, external illumination, I/O) 2 x M12, 4-pin socket, D-coded (100-Megabit Ethernet, dual port fieldbus) 1 x M12, 8-pin female connector, X-coded (Gigabit Ethernet) |
| Supply voltage | 24 V DC, $\pm 20\%$ ¹⁾ |
| Power consumption | Typ. 24 W ²⁾ |
| Current consumption | \leq max. 2 A |
| Housing material | Aluminum die cast |
| Housing color | Anthracite gray (RAL 7016) |
| Window material | Glass (2 mm thick, scratch-proof coating) |
| Enclosure rating | IP65 (IEC 60529:2013 +C1:2013 +C2:2015 +AMD2 C1:2019, EN 60529:1991 +A1:2010 +A2:2013 +AC:2019-02) |
| Electrical safety | EN 61010:2010 / EN 61010-1:2010/A1:2019/AC:2019-04 |
| Weight | 640 g, without lens and connection cables |
| Dimensions (L x W x H) | 143.4 mm x 90 mm x 46 mm ³⁾ |
| MTBF | 100,000 h |

¹⁾ Voltage source in accordance with ES1 (EN 62368-1) or SELV (EN 60950-1).

²⁾ The typical power consumption depends on the product configuration. The specified value applies to digital outputs without load.

³⁾ Only housing. Lens, integrated illumination unit, spacer and optics protection hood not included.

Safety-related parameters

| | |
|---------------------|---------------------|
| Conformities | Conformance Class B |
|---------------------|---------------------|

Performance

| | |
|---------------------------------|--|
| Readable code structures | 1D codes, 2D codes, Stacked |
| Bar code types | Code 128, GS1-128, EAN 128, EAN 8, EAN 13, UPC-A, UPC-E, Interleaved 2 of 5, Codabar, Code 93, Postal code |
| 2D code types | Data Matrix ECC200, GS1 Data-Matrix, MaxiCode, QR code, Aztec |
| Stacked code types | PDF417 |
| Code printing process | Printed codes |

Interfaces

| | | |
|---------------------|------------------------|--|
| Ethernet | | ✓, TCP/IP |
| | Function | Data interface (read result output), service interface, FTP (image transmission) |
| | Data transmission rate | 10/100/1,000 Mbit/s, MAC address (device-specific), see type label |
| EtherNet/IP™ | | ✓ (2) |
| | Function | Data interface (read result output), Trigger interface |
| | Data transmission rate | 10/100 MBit/s |
| CAN | | ✓ |
| | Function | Data interface (read result output), Trigger interface |
| | Data transmission rate | 500 kbit/s |
| Serial | | ✓, RS-232, RS-422, RS-232 |
| | Function | Data interface Service interface |

¹⁾ Memory card is available as an optional accessory. To ensure that the memory card functions reliably, only use card types (industrial standard) approved by SICK. Other functions are available upon request.

| | | |
|--|-----------------------------|---|
| | Data transmission rate | 1.2 kBaud ... 115.2 kBaud 57.6 kBaud |
| USB | | ✓ , USB 2.0 |
| | Function | Service interface (accessing the web server), Ethernet via USB (RNDIS) |
| | Data transmission rate | 480 Mbit/s |
| PROFINET | | ✓ (2) |
| | Function | Data interface (read result output), Trigger interface |
| | Data transmission rate | 10/100 MBit/s |
| Fieldbus, industrial network | | |
| | Supported protocol versions | PROFINET specification V2.43 |
| | GSDML | According to GSDML specification V2.43 |
| | Conformance | Conformance Class B |
| | Network management | SNMP, MIB-2, LLDP, MRP client support |
| | Switch properties | 2 port real-time switch compliant with IEEE 802 |
| | Port properties | 100Base-TX, auto-negotiation, auto-crossover (MDIX), auto-polarity |
| | Net load | Net load class III in accordance with security level 1 test |
| Digital inputs | | 2 ("Sensor 1", "Sensor 2", insulated, encoder input, external trigger) |
| Configurable digital inputs/outputs | | |
| | X1 | 4 (DIO 3, DIO 4, DIO 5, DIO 6) |
| | X2 | 2 (DIO 7, DIO 8) |
| Reading pulse | | Digital inputs, CAN, PROFINET via trigger bit, EtherNet/IP™ via trigger bit |
| Optical indicators | | 12 LEDs (10 x status displays, 2 x feedback spot) |
| Operator interfaces | | Web server |
| Configuration software | | SOPASair |
| Memory card slot | | Micro SD memory card (not included with delivery) ¹⁾ |
| Parameter cloning | | Micro SD memory card Control software |
| Data storage and retrieval | | Image and data storage via external FTP |
| EncoderFrequency | | Max. 50 kHz |
| External illumination control | | Via digital output (max. 24 V trigger) |

¹⁾ Memory card is available as an optional accessory. To ensure that the memory card functions reliably, only use card types (industrial standard) approved by SICK. Other functions are available upon request.

Ambient data

| | |
|--|--|
| Electromagnetic compatibility (EMC) | |
| Interference resistance | IEC 61000-6-2:2016 / EN IEC 61000-6-2:2019 |
| Interference emission | IEC 61000-6-4:2018 / EN IEC 61000-6-4:2019 |
| Vibration resistance | EN 60068-2-6:2007, EN 60068-2-64:2019 |
| Shock resistance | EN 60068-2-27:2008 |
| Ambient operating temperature | 0 °C ... +50 °C ¹⁾ |
| Storage temperature | -20 °C ... +70 °C |
| Relative humidity | ≤ 90 %, Non-condensing |

¹⁾ If the ambient operating temperature will be ≥ 45 °C, ensure adequate heat dissipation when mounting the device.

| | |
|-----------------------------------|-------------------|
| Ambient light immunity | 2,000 lx, on code |
| Contamination rating | 2 (EN 61010-1) |
| Altitude (above sea level) | < 5,000 m |

¹⁾ If the ambient operating temperature will be ≥ 45 °C, ensure adequate heat dissipation when mounting the device.


Certificates

| | |
|--|---|
| EU declaration of conformity | ✓ |
| UK declaration of conformity | ✓ |
| ACMA declaration of conformity | ✓ |
| China RoHS | ✓ |
| cULus certificate | ✓ |
| Profinet certificate | ✓ |
| Ethernet/IP certificate | ✓ |
| BIS registration | ✓ |
| Information according to Art. 3 of Data Act (Regulation EU 2023/2854) | ✓ |

Classifications

| | |
|-----------------------|----------|
| ECLASS 5.0 | 27280103 |
| ECLASS 5.1.4 | 27280103 |
| ECLASS 6.0 | 27280103 |
| ECLASS 6.2 | 27280103 |
| ECLASS 7.0 | 27280103 |
| ECLASS 8.0 | 27280103 |
| ECLASS 8.1 | 27280103 |
| ECLASS 9.0 | 27280103 |
| ECLASS 10.0 | 27280103 |
| ECLASS 11.0 | 27280103 |
| ECLASS 12.0 | 27280103 |
| ETIM 5.0 | EC002550 |
| ETIM 6.0 | EC002550 |
| ETIM 7.0 | EC002999 |
| ETIM 8.0 | EC002999 |
| UNSPSC 16.0901 | 43211701 |

Dimensional drawing

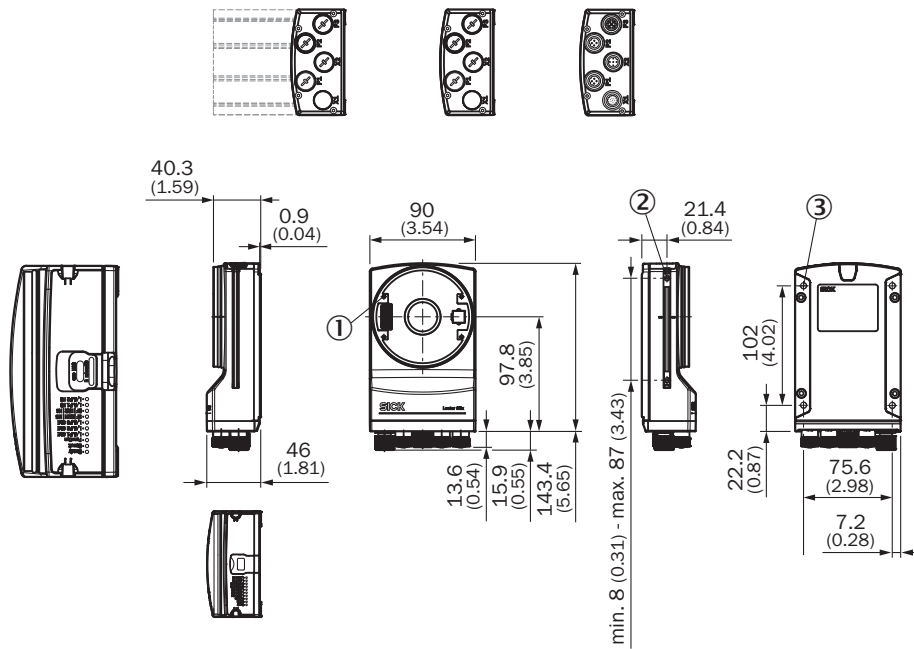


Dimensions in mm (inch)


- ① 4 tapped blind holes, M2.5, 5.5 mm deep, for mounting the spacer
- ② 2 M5 sliding nuts; 5.5 mm deep; pivoting; as an alternative method of mounting the product
- ③ 4 tapped blind holes, M5, 5.5 mm deep for mounting the product

Field of view

Perceived area of field of view: H x V (mm) ①

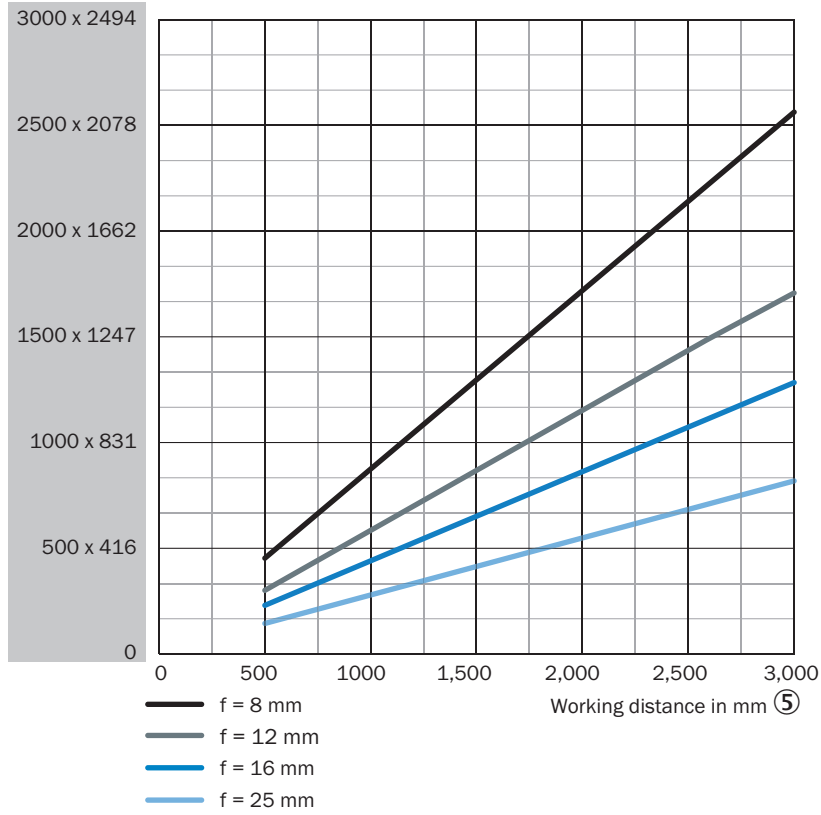

Min. resolution in mm ②

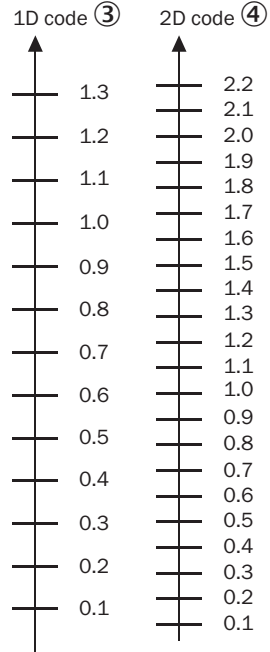

- ① perceived field of view area: horizontal x vertical (mm)
- ② Minimum resolution in mm
- ③ 1D code
- ④ 2D code
- ⑤ Working distance in mm

Selection Guide V2D8505R, focal length: 25mm

FIELD OF VIEW

V2D8505R-xxxxxxx, focal length: 25 mm

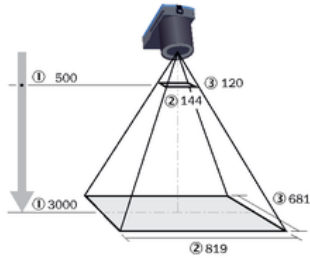


Figure 26: Field of view of V2D8505R-xxxxxxx, focal length: 25 mm

- ① Working distance in mm
- ② Perceived field of view area: horizontal (mm)
- ③ Perceived field of view area: vertical (mm)

Table 9: Perceived field of view area

| Working distance (mm) | Horizontal (mm) | Vertical (mm) |
|-----------------------|-----------------|---------------|
| 500 | 144 | 120 |
| 1000 | 279 | 232 |
| 1500 | 414 | 344 |
| 2000 | 549 | 456 |
| 2500 | 684 | 569 |
| 3000 | 819 | 681 |

Table 10: Minimum resolution

| Working distance (mm) | 1D code (mm) | 2D code (mm) |
|-----------------------|--------------|--------------|
| 500 | 0.07 | 0.12 |
| 1000 | 0.14 | 0.22 |
| 1500 | 0.20 | 0.34 |
| 2000 | 0.27 | 0.44 |
| 2500 | 0.33 | 0.56 |
| 3000 | 0.40 | 0.66 |

Selection Guide V2D8505R, focal length: 16mm

FIELD OF VIEW

V2D8505R-xxxxxxx, focal length: 16 mm

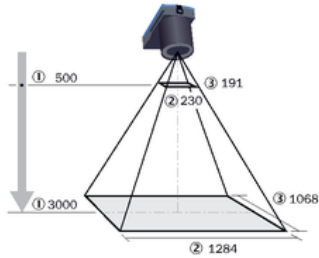


Figure 25: Field of view V2D8505R-xxxxxxx, focal length: 16 mm

- ① Working distance in mm
- ② Perceived field of view area: horizontal (mm)
- ③ Min. perceived field of view area: horizontal (mm)

Table 7: Perceived field of view area

| Working distance (mm) | Horizontal (mm) | Vertical (mm) |
|-----------------------|-----------------|---------------|
| 500 | 230 | 191 |
| 1000 | 441 | 366 |
| 1500 | 652 | 542 |
| 2000 | 863 | 717 |
| 2500 | 1073 | 892 |
| 3000 | 1284 | 1068 |

Table 8: Minimum resolution

| Working distance (mm) | 1D code (mm) | 2D code (mm) |
|-----------------------|--------------|--------------|
| 500 | 0.11 | 0.18 |
| 1000 | 0.21 | 0.36 |
| 1500 | 0.32 | 0.52 |
| 2000 | 0.42 | 0.7 |
| 2500 | 0.52 | 0.88 |
| 3000 | 0.63 | 1.04 |

Selection Guide V2D8505R, focal length: 12mm

FIELD OF VIEW

V2D8505R-xxxxxxx, focal length: 12 mm

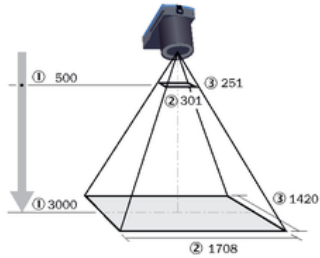


Figure 24: Field of view V2D8505R-xxxxxxx, focal length: 12 mm

- ① Working distance in mm
- ② Perceived field of view area: horizontal (mm)
- ③ Perceived field of view area: vertical (mm)

Table 5: Perceived field of view area

| Working distance (mm) | Horizontal (mm) | Vertical (mm) |
|-----------------------|-----------------|---------------|
| 500 | 301 | 251 |
| 1000 | 583 | 484 |
| 1500 | 864 | 718 |
| 2000 | 1145 | 952 |
| 2500 | 1427 | 1186 |
| 3000 | 1708 | 1420 |

Table 6: Minimum resolution

| Working distance (mm) | 1D code (mm) | 2D code (mm) |
|-----------------------|--------------|--------------|
| 500 | 0.15 | 0.24 |
| 1000 | 0.28 | 0.48 |
| 1500 | 0.42 | 0.70 |
| 2000 | 0.56 | 0.92 |
| 2500 | 0.69 | 1.16 |
| 3000 | 0.83 | 1.38 |

Selection Guide V2D8505R, focal length: 8mm

FIELD OF VIEW

V2D8505R-xxxxxxx, focal length: 8 mm

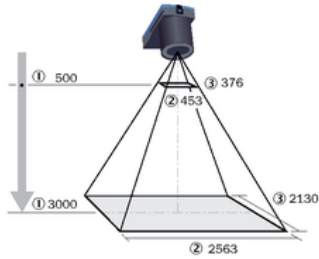


Figure 23: Field of view V2D8505R-xxxxxxx, focal length: 8 mm

- ① Working distance in mm
- ② Perceived field of view area: horizontal (mm)
- ③ Perceived field of view area: vertical (mm)

Table 3: Perceived field of view area

| Working distance (mm) | Horizontal (mm) | Vertical (mm) |
|-----------------------|-----------------|---------------|
| 500 | 453 | 376 |
| 1000 | 875 | 727 |
| 1500 | 1297 | 1078 |
| 2000 | 1719 | 1429 |
| 2500 | 2141 | 1779 |
| 3000 | 2563 | 2130 |

Table 4: Minimum resolution

| Working distance (mm) | 1D code (mm) | 2D code (mm) |
|-----------------------|--------------|--------------|
| 500 | 0.22 | 0.36 |
| 1000 | 0.43 | 0.72 |
| 1500 | 0.63 | 1.06 |
| 2000 | 0.84 | 1.4 |
| 2500 | 1.04 | 1.74 |
| 3000 | 1.25 | 2.08 |

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com