

SSL-2J04-G10ME60

Industrial Ethernet cables and fieldbus cables



PLUG CONNECTORS AND CABLES

SSL-2J04-G10ME60 | Industrial Ethernet cables and fieldbus cables

PLUG CONNECTORS AND CABLES



Ordering information

Туре	Part no.	
SSL-2J04-G10ME60	6047918	

Other models and accessories -> www.sick.com/Industrial_Ethernet_cables_and_fieldbus_cables

Detailed technical data

Technical specifications

Accessory groupPlug connectors and cablesAccessory familyConnection cablesConnection type head AMale connector, M12, 4-pin, straight, D-codedConnection type head BMale connector, RJ45, 8-pin, straightConnector materialTPULocking nut materialZinc die-cast, nickel-platedTightening torque0.4 NmCable10 m, 4-wire, CAT5, CAT5e, PUR, halogen-freeJacket materialPUR, halogen-free
Connection type head AMale connector, M12, 4-pin, straight, D-codedConnection type head BMale connector, RJ45, 8-pin, straightConnector materialTPULocking nut materialZinc die-cast, nickel-platedTightening torque0.4 NmCable10 m, 4-wire, CAT5, CAT5e, PUR, halogen-freeJacket materialPUR, halogen-free
Connection type head BMale connector, RJ45, 8-pin, straightConnector materialTPULocking nut materialZinc die-cast, nickel-platedTightening torque0.4 NmCable10 m, 4-wire, CAT5, CAT5e, PUR, halogen-freeJacket materialPUR, halogen-free
Connector materialTPULocking nut materialZinc die-cast, nickel-platedTightening torque0.4 NmCable10 m, 4-wire, CAT5, CAT5e, PUR, halogen-freeJacket materialPUR, halogen-free
Locking nut materialZinc die-cast, nickel-platedTightening torque0.4 NmCable10 m, 4-wire, CAT5, CAT5e, PUR, halogen-freeJacket materialPUR, halogen-free
Tightening torque0.4 NmCable10 m, 4-wire, CAT5, CAT5e, PUR, halogen-freeJacket materialPUR, halogen-free
Cable 10 m, 4-wire, CAT5, CAT5e, PUR, halogen-free Jacket material PUR, halogen-free
Jacket material PUR, halogen-free
Jacket color Blue
Cable diameter 6.4 mm
Conductor cross section 2 x 2 x 0.14 mm ²
Shielding Shielded
Bending radius
Flexible use > 8 x cable diameter
Stationary position > 4 x cable diameter
Signal type Ethernet
Transmission characteristics CAT5
Data transmission rate ≤ 100 Mbit/s
Enclosure rating IP65/ IP67 (M12), IP20 (RJ45)
DescriptionHead A: male connector, M12, 4-pin, straight, D-coded Head B: male connector, RJ45, 8-pin, straight Cable: PUR, halogen-free, shielded, 2 x 2 x 0.14 mm², Ø 6.4 mm
Ambient operating temperature
Flexible use -20 °C +80 °C
Stationary position -40 °C +80 °C
Head -25 °C +90 °C
Classifications


ECLASS 5.0	19030312
ECLASS 5.1.4	19030312
ECLASS 6.0	27060304
ECLASS 6.2	27060304
ECLASS 7.0	27060304

SSL-2J04-G10ME60 | Industrial Ethernet cables and fieldbus cables

PLUG CONNECTORS AND CABLES

ECLASS 8.0	27060304
ECLASS 8.1	27060304
ECLASS 9.0	27060304
ECLASS 10.0	27060304
ECLASS 11.0	27060304
ECLASS 12.0	27060304
ETIM 5.0	EC000830
ETIM 6.0	EC000830
ETIM 7.0	EC003249
ETIM 8.0	EC003249
UNSPSC 16.0901	26121604

Dimensional drawing (Dimensions in mm (inch))

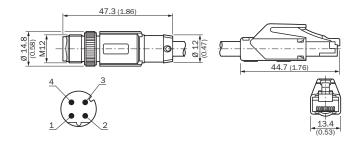

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com



Online data sheet

