



MRS6124R-131001

MRS6000

3D LIDAR SENSORS

SICK
Sensor Intelligence.



Ordering information

Type	part no.
MRS6124R-131001	6065086

Other models and accessories → www.sick.com/MRS6000



Detailed technical data

Features

Application	Outdoor, Indoor
Light source	Infrared light (870 nm)
Laser class	1 (IEC 60825-1:2014)
Aperture angle	
Horizontal	120°
Vertical	15°
Scanning frequency	10 Hz
Angular resolution	
Horizontal	0.13°
Vertical	0.625°
Working range	0.5 m ... 200 m
Scanning range	
At 10% remission factor	30 m
At 90% remission factor	75 m
Amount of evaluated echoes	4

Mechanics/electronics

Connection type	3 x M12 round connectors (supply voltage, Ethernet, I/O)
Supply voltage	10 V ... 29 V
Power consumption	20 W
Housing material	Aluminum / plastic (PMMA)
Housing color	Gray (RAL 7042)
Enclosure rating	IP65 IP67
Protection class	III
Weight	2.2 kg
Dimensions (L x W x H)	125.5 mm x 176 mm x 131 mm
MTBF	9.5 years

Safety-related parameters

MTTF_D	19 years
-------------------------	----------

Performance

Systematic error	$\pm 125 \text{ mm}^{1)}$
Statistical error	$30 \text{ mm}^{1)}$

¹⁾ Typical value; actual value depends on environmental conditions.

Interfaces

Ethernet	✓, TCP/IP
Function	Raw data interface/parameterization
Data transmission rate	100 Mbit/s ... 1 Gbit/s

Ambient data

Ambient operating temperature	-20 °C ... +60 °C
--------------------------------------	-------------------

General notes

Note on use	The sensor does not constitute a safety component as defined by relevant legislation on machine safety.
--------------------	---


Certificates

EU declaration of conformity	✓
ACMA declaration of conformity	✓
China RoHS	✓

Classifications


ECLASS 5.0	27270990
ECLASS 5.1.4	27270990
ECLASS 6.0	27270913
ECLASS 6.2	27270913
ECLASS 7.0	27270913
ECLASS 8.0	27270913
ECLASS 8.1	27270913
ECLASS 9.0	27270913
ECLASS 10.0	27270913
ECLASS 11.0	27270913
ECLASS 12.0	27270913
ETIM 5.0	EC002550
ETIM 6.0	EC002550
ETIM 7.0	EC002550
ETIM 8.0	EC002550
UNSPSC 16.0901	41111615

Dimensional drawing

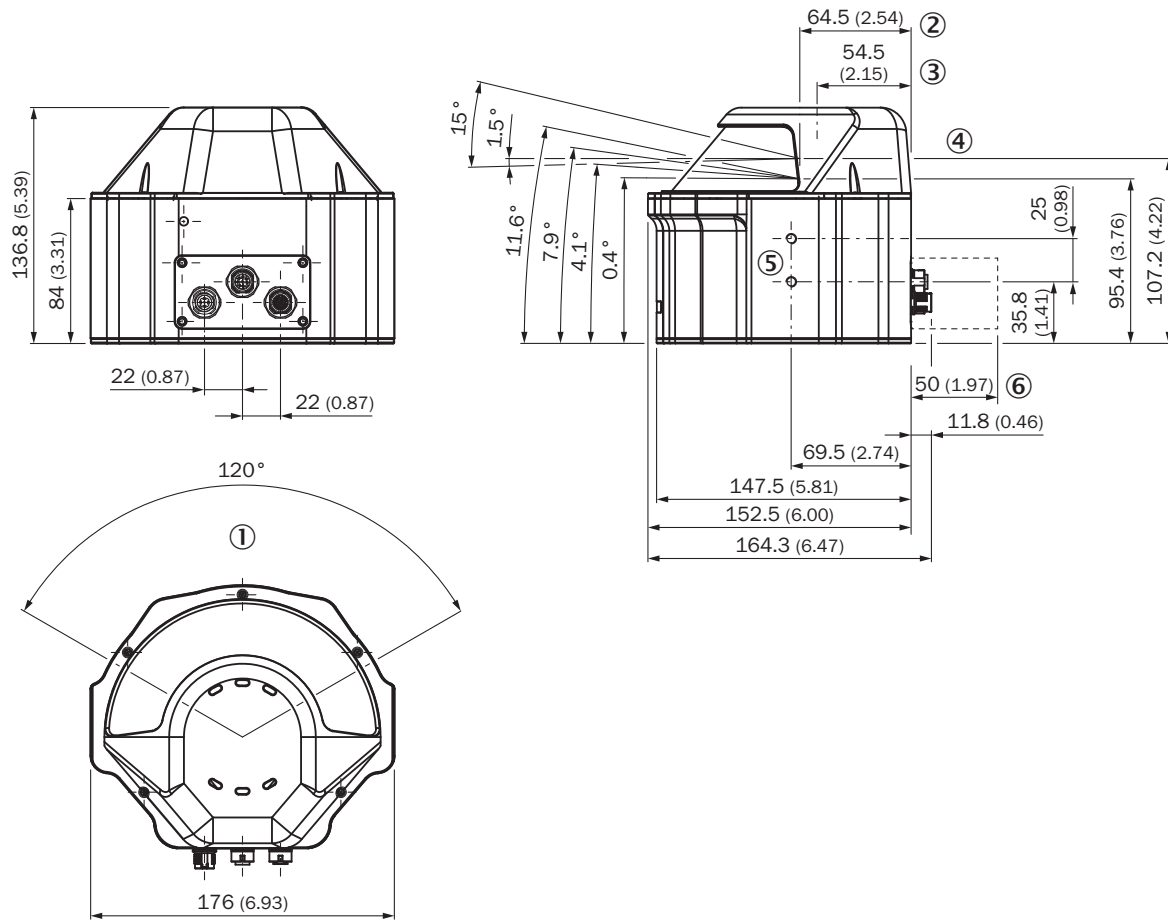


Dimensions in mm (inch)

- ① aperture angle
- ② Zeroset
- ③ Rotation axis
- ④ Horizontal axis
- ⑤ Mounting hole M6 x 10 mm
- ⑥ Area to be kept free for connecting cables

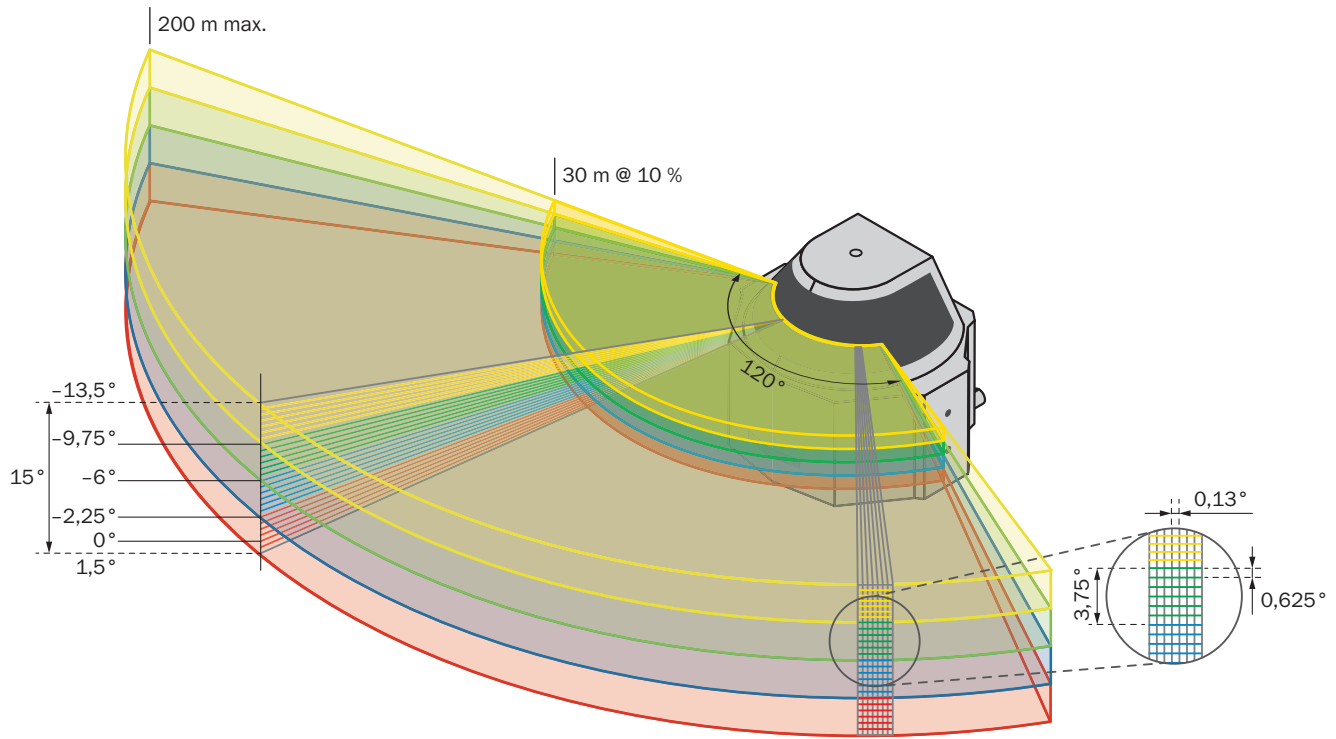

Functional principle

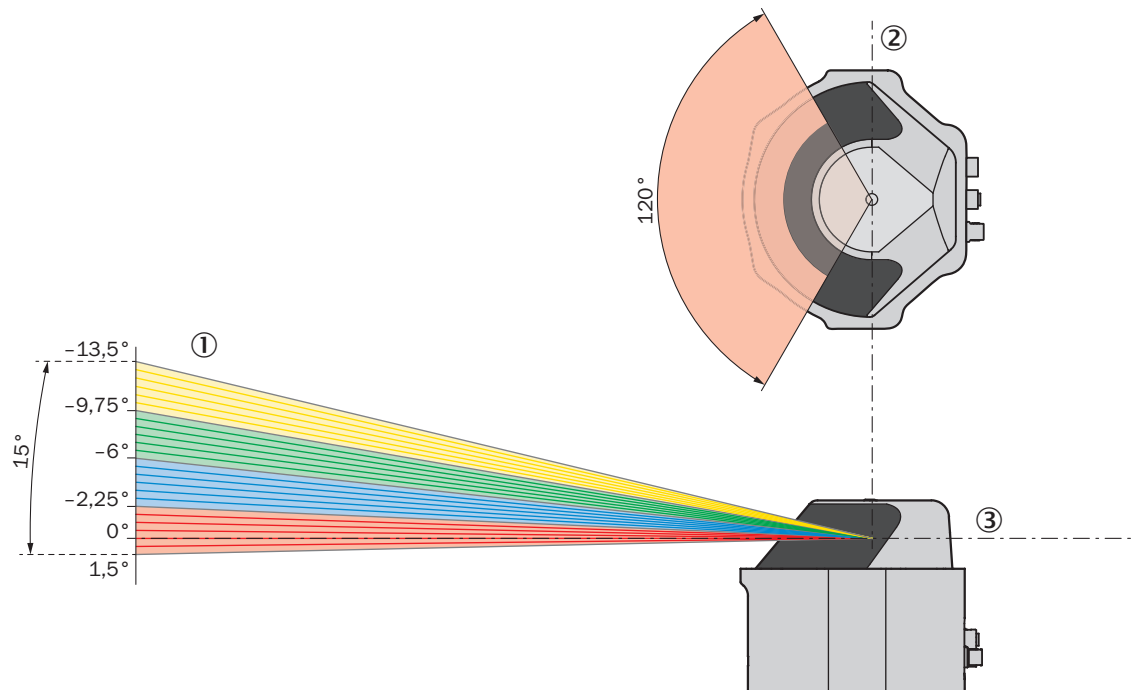

- ① 4 scan planes with 6 layers each
- ② Vertical axis
- ③ Horizontal axis

Recommended accessories

Other models and accessories → www.sick.com/MRS6000

	Brief description	Type	part no.
Mounting systems			
	• Description: MRS6000 bracket for mounting from behind • Dimensions (W x H x L): 224 mm x 90 mm x 117 mm • Material: Stainless steel • Details: Stainless steel • Items supplied: Mounting hardware included • Suitable for: MRS6000	Mounting kit	2102120

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com