Data sheet

MZT1-03VNS-KU0

MZT1

CYLINDER SENSORS

SICK
Sensor Intelligence.

Ordering information

Type	part no.
MZT1-03VNS-KU0	1023009

Other models and accessories → www.sick.com/MZT1

Detailed technical data

Features

Cylinder type	T-slot
Cylinder types with adapter	Profile cylinder Tie rod cylinder Dovetail groove cylinder Round body cylinder SMC rail CDQ2 SMC rail ECDQ2
Housing length	30.5 mm
Switching output	NPN
Switching output detail	NPN
Switching frequency	5,000 Hz
Output function	NO
Electrical wiring	DC 3-wire
Enclosure rating	IP67 [1]

[1] According to EN 60529.

Mechanics/electronics

Supply voltage	10 V DC ... 30 V DC
Power consumption	10 mA, without load
Voltage drop	≤ 2 V [1]
Continuous current I_a	≤ 100 mA
Protection class	III
Response sensitivity, typ.	≤ 2.8 mT
Overrun distance, typ.	9 mm
Hysteresis, typ.	≤ 0.5 mT
Reproducibility	≤ 0.1 mT [2]
Reverse polarity protection	Yes

[1] At I_a max.
[2] Supply voltage U_B and constant ambient temperature Ta.

Short-circuit protection	Yes
Status indicator LED	Yes
Power-up pulse protection	Yes
Ambient operating temperature	–25 °C ... +75 °C
Shock and vibration resistance	30 g, 11 ms / 10 ... 55 Hz, 1 mm
EMC	According to EN 60947-5-2
Connection type	Cable, 3-wire, 2 m
Connection type Detail	
Conductor cross section	0.14 mm²
Material	
Housing	Plastic
Cable	PUR
UL File No.	NRKH.E181493

[1] At I_a max.

[2] Supply voltage U_B and constant ambient temperature Ta.

Classifications

ECLASS 5.0	27270104
ECLASS 5.1.4	27270104
ECLASS 6.0	27270104
ECLASS 6.2	27270104
ECLASS 7.0	27270104
ECLASS 8.0	27270104
ECLASS 8.1	27270104
ECLASS 9.0	27270104
ECLASS 10.0	27270104
ECLASS 11.0	27270104
ECLASS 12.0	27274301
ETIM 5.0	EC002544
ETIM 6.0	EC002544
ETIM 7.0	EC002544
ETIM 8.0	EC002544
UNSPSC 16.0901	39122230

Connection type

Connection diagram Cd-001



Dimensional drawing Cable

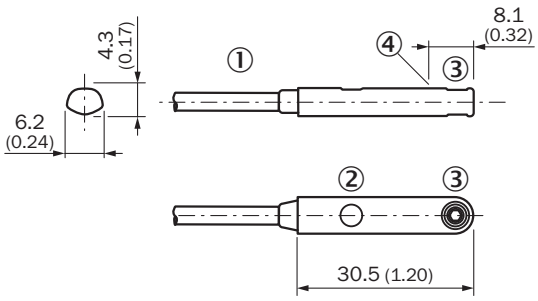

Dimensions in mm (inch)
① Connection
② Indication LED
③ Fixing screw
④ Position sensor element

Recommended accessories

Other models and accessories ➜ www.sick.com/MZT1

	Brief description	Type	part no.
Mounting systems			
	• **Description:** Mounting bracket for integrated profile cylinder/tie-rod cylinder • **Material:** Zinc diecast • **Details:** Zinc diecast • **Items supplied:** Mounting hardware included	BEF-KHZ-PT1	2022702
	• **Description:** Mounting bracket for cylinder with dovetail slot • **Material:** Aluminum • **Details:** Aluminum • **Items supplied:** Without mounting hardware	BEF-KHZ-ST1	2022703
	• **Description:** Mounting bracket for mounting on SMC rails ECDQ2 (T-slot) • **Material:** Aluminum • **Details:** Aluminum • **Items supplied:** Without mounting hardware	BEF-KHZ-TT1	2046439
	• **Description:** Mounting bracket for mounting on SMC rails CDQ2 (T-slot) • **Material:** Aluminum • **Details:** Aluminum • **Items supplied:** Without mounting hardware	BEF-KHZ-TT2	2046440
	• **Description:** Mounting bracket on round body cylinder with piston diameter of 8 mm ... 130 mm, ambient temperature min –30 °C max 80 °C • **Material:** Stainless steel, Zinc cast • **Details:** Stainless steel, Zinc cast • **Packing unit:** 1 piece • **Suitable for:** T-slot	BEF-KHZ-RT1-130	2077684
	• **Description:** Mounting bracket on round body cylinder with piston diameter of 12 mm, ambient temperature min 0 °C max 50 °C • **Dimensions (W x H x L):** 22.4 m • **Material:** Plastic, Aluminum • **Details:** Plastic, Aluminum • **Packing unit:** 1 piece • **Suitable for:** T-slot	BEF-KHZ-RT-12	2077681
	• **Description:** Mounting bracket on round body cylinder with piston diameter of 8 mm ... 25 mm, ambient temperature min –30 °C max 80 °C • **Material:** Stainless steel, Zinc cast • **Details:** Stainless steel, Zinc cast • **Packing unit:** 1 piece • **Suitable for:** T-slot	BEF-KHZ-RT1-25	2077682
	• **Description:** Mounting bracket on round body cylinder with piston diameter of 16 mm, ambient temperature min 0 °C max 50 °C • **Dimensions (W x H x L):** 26.6 m • **Material:** Plastic, Aluminum • **Details:** Plastic, Aluminum • **Packing unit:** 1 piece • **Suitable for:** T-slot	BEF-KHZ-RT-16	2077680
	• **Description:** Mounting bracket on round body cylinder with piston diameter of 8 mm ... 63 mm, ambient temperature min –30 °C max 80 °C • **Material:** Stainless steel, Zinc cast • **Details:** Stainless steel, Zinc cast • **Packing unit:** 1 piece • **Suitable for:** T-slot	BEF-KHZ-RT1-63	2077683
	• **Description:** Mounting bracket on round body cylinder with piston diameter of 20 mm, ambient temperature min 0 °C max 50 °C • **Dimensions (W x H x L):** 30.6 m • **Material:** Plastic, Aluminum • **Details:** Plastic, Aluminum • **Packing unit:** 1 piece	BEF-KHZ-RT-20	2077679

	Brief description	Type	part no.
	• **Suitable for:** T-slot		
	• **Description:** Mounting bracket on round body cylinder with piston diameter of 25 mm, ambient temperature min 0 °C max 50 °C • **Dimensions (W x H x L):** 35.7 m • **Material:** Plastic, Aluminum • **Details:** Plastic, Aluminum • **Packing unit:** 1 piece • **Suitable for:** T-slot	BEF-KHZ-RT-25	2077678
	• **Description:** Mounting bracket on round body cylinder with piston diameter of 32 mm, ambient temperature min 0 °C max 50 °C • **Dimensions (W x H x L):** 42.9 m • **Material:** Plastic, Aluminum • **Details:** Plastic, Aluminum • **Packing unit:** 1 piece • **Suitable for:** T-slot	BEF-KHZ-RT-32	2077677
	• **Description:** Mounting bracket on round body cylinder with piston diameter of 40 mm, ambient temperature min 0 °C max 50 °C • **Dimensions (W x H x L):** 50.9 m • **Material:** Plastic, Aluminum • **Details:** Plastic, Aluminum • **Packing unit:** 1 piece • **Suitable for:** T-slot	BEF-KHZ-RT-40	2077676
	• **Description:** Mounting bracket on round body cylinder with piston diameter of 50 mm, ambient temperature min 0 °C max 50 °C • **Dimensions (W x H x L):** 61.8 m • **Material:** Plastic, Aluminum • **Details:** Plastic, Aluminum • **Packing unit:** 1 piece • **Suitable for:** T-slot	BEF-KHZ-RT-50	2077675

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com

SICK
Sensor Intelligence.