



DATA SHEET

# GLL170-P334S06

GLL170  
Fiber-optic sensors

**SICK** Sensor Intelligence

FIBER-OPTIC SENSORS

# GLL170-P334S06

ORDERING INFORMATION

| Type           | part no. |
|----------------|----------|
| GLL170-P334S06 | 6071258  |

Further device versions and accessories at [www.sick.com/GLL170](http://www.sick.com/GLL170)



Illustration may differ



DETAILED TECHNICAL DATA

FEATURES

|                             |   |   |
|-----------------------------|---|---|
| Device type                 | Fiber-optic amplifier                     |   |
| Device type detail          | Stand-alone                               |   |
| Functional principle detail | Depending on the optical fiber cable used |   |
| Sensing range max.          | Depending on the optical fiber cable used |   |
| Emitted beam                | Light source                              | LED <sup>1)</sup>   |
|                             | Type of light                             | Visible red light   |
| Key LED figures             | Normative reference                       | EN 62471:2008-09   IEC 62471:2006, modified   |
|                             | LED risk group marking                    | Free group  |
|                             | Wave length                               | 632 nm  |
|                             | Average service life                      | 100,000 h at T <sub>a</sub> = +25 °C  |
| Adjustment                  | Potentiometer                             | For setting the sensing range/for setting the switching mode/for adjusting the switch-off delay                   |
|                             | Display                                   |   |
|                             | LED green                                 | Operating indicator<br>Static on: power on<br>Dimmed in the range +/- 10 % of the switching threshold             |
|                             | LED yellow                                | Status of digital output<br>Permanently on: Switching output active<br>Permanently off: Digital output not active |
| Items supplied              | BEF-WLL180 mounting bracket               |   |

<sup>1)</sup> Average service life: 100,000 h at T<sub>a</sub> = +25 °C.

**SAFETY-RELATED PARAMETERS**

|                               |           |
|-------------------------------|-----------|
| MTTF <sub>D</sub>             | 760 years |
| DC <sub>avg</sub>             | 0 %       |
| T <sub>M</sub> (mission time) | 20 years  |

**ELECTRONICS**

|                                       |  |                              |   |                                       |  |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |
|---------------------------------------|--|------------------------------|---|---------------------------------------|--|----------------|----------------------|-----------------------------|-------------------------------------|-----------------------------|----------------------------------|----------------------------------|----------|----------------------------|--|---------------|----------|---------------------|-------|----------------|-------------------------------|------------|--|
| Supply voltage U <sub>B</sub>         | 10 V DC ... 30 V DC <sup>1)</sup>  |                              |   |                                       |  |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |
| Ripple                                | ≤ 10 % <sup>2)</sup>   |                              |   |                                       |  |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |
| Current consumption                   | ≤ 30 mA <sup>3)</sup>  |                              |   |                                       |  |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |
| Protection class                      | III  |                              |   |                                       |  |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |
| Digital output                        | <table border="0"> <tr> <td>Number</td> <td>1</td> </tr> <tr> <td>Type</td> <td>PNP <sup>4)</sup></td> </tr> <tr> <td>Switching mode</td> <td>Light/dark switching</td> </tr> <tr> <td>Signal voltage PNP HIGH/LOW</td> <td>Approx. U<sub>B</sub>-1.5 V / 0 V</td> </tr> <tr> <td>Signal voltage NPN HIGH/LOW</td> <td>Approx. U<sub>B</sub> / &lt; 1.5 V</td> </tr> <tr> <td>Output current I<sub>max.</sub></td> <td>≤ 100 mA</td> </tr> <tr> <td>Circuit protection outputs</td> <td>Reverse polarity protected<br/>Overcurrent protected<br/>Short-circuit protected</td> </tr> <tr> <td>Response time</td> <td>≤ 250 μs</td> </tr> <tr> <td>Switching frequency</td> <td>2 kHz</td> </tr> <tr> <td>Time functions</td> <td>Without time delay, off delay</td> </tr> <tr> <td>Delay time</td> <td>Selectable via rotary switch, 0 ms ... 40 ms</td> </tr> </table> | Number                       | 1   | Type                                  | PNP <sup>4)</sup>                                  | Switching mode | Light/dark switching | Signal voltage PNP HIGH/LOW | Approx. U <sub>B</sub> -1.5 V / 0 V | Signal voltage NPN HIGH/LOW | Approx. U <sub>B</sub> / < 1.5 V | Output current I <sub>max.</sub> | ≤ 100 mA | Circuit protection outputs | Reverse polarity protected<br>Overcurrent protected<br>Short-circuit protected | Response time | ≤ 250 μs | Switching frequency | 2 kHz | Time functions | Without time delay, off delay | Delay time | Selectable via rotary switch, 0 ms ... 40 ms |
| Number                                | 1  |                              |   |                                       |  |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |
| Type                                  | PNP <sup>4)</sup>  |                              |   |                                       |  |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |
| Switching mode                        | Light/dark switching   |                              |   |                                       |  |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |
| Signal voltage PNP HIGH/LOW           | Approx. U <sub>B</sub> -1.5 V / 0 V  |                              |   |                                       |  |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |
| Signal voltage NPN HIGH/LOW           | Approx. U <sub>B</sub> / < 1.5 V   |                              |   |                                       |  |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |
| Output current I <sub>max.</sub>      | ≤ 100 mA   |                              |   |                                       |  |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |
| Circuit protection outputs            | Reverse polarity protected<br>Overcurrent protected<br>Short-circuit protected   |                              |   |                                       |  |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |
| Response time                         | ≤ 250 μs   |                              |   |                                       |  |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |
| Switching frequency                   | 2 kHz  |                              |   |                                       |  |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |
| Time functions                        | Without time delay, off delay  |                              |   |                                       |  |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |
| Delay time                            | Selectable via rotary switch, 0 ms ... 40 ms   |                              |   |                                       |  |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |
| Pin/Wire assignment                   | <table border="0"> <tr> <td>Function of pin 4/black (BK)</td> <td>Digital output, received light → Output Q1 HIGH</td> </tr> <tr> <td>Function of pin 4/black (BK) – detail</td> <td>The pin 4 function of the sensor can be configured</td> </tr> </table>  | Function of pin 4/black (BK) | Digital output, received light → Output Q1 HIGH | Function of pin 4/black (BK) – detail | The pin 4 function of the sensor can be configured |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |
| Function of pin 4/black (BK)          | Digital output, received light → Output Q1 HIGH  |                              |   |                                       |  |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |
| Function of pin 4/black (BK) – detail | The pin 4 function of the sensor can be configured   |                              |   |                                       |  |                |                      |                             |                                     |                             |                                  |                                  |          |                            |  |               |          |                     |       |                |                               |            |  |

<sup>1)</sup> Limit values.

<sup>2)</sup> May not fall below or exceed U<sub>B</sub> tolerances.

<sup>3)</sup> Without load.

<sup>4)</sup> Selectable via rotary switch.

**MECHANICS**

|  |   |                |                     |                |              |
|--|---|----------------|---------------------|----------------|--------------|
| Housing  | Rectangular   |                |                     |                |              |
| Dimensions (W x H x D)                         | 10 mm x 31.7 mm x 72.5 mm   |                |                     |                |              |
| Connection                                     | Male connector M8, 4-pin  |                |                     |                |              |
| Connection detail                              | <table border="0"> <tr> <td>Conductor size</td> <td>0.2 mm<sup>2</sup></td> </tr> <tr> <td>Cable diameter</td> <td>Ø 3.8 mm</td> </tr> </table> | Conductor size | 0.2 mm <sup>2</sup> | Cable diameter | Ø 3.8 mm     |
| Conductor size                                 | 0.2 mm <sup>2</sup>   |                |                     |                |              |
| Cable diameter                                 | Ø 3.8 mm  |                |                     |                |              |
| Material                                       | <table border="0"> <tr> <td>Housing</td> <td>Plastic, PC/POM</td> </tr> <tr> <td>Cable</td> <td>Plastic, PVC</td> </tr> </table>                | Housing        | Plastic, PC/POM     | Cable          | Plastic, PVC |
| Housing  | Plastic, PC/POM   |                |                     |                |              |
| Cable  | Plastic, PVC  |                |                     |                |              |
| Weight   | 19 g  |                |                     |                |              |
| Maximum tightening torque of the fixing screws | 0.5 Nm  |                |                     |                |              |

**AMBIENT DATA**

|                               |   |
|-------------------------------|---|
| Enclosure rating              | IP66 (EN 60529)                                       |
| Ambient operating temperature | -25 °C ... +55 °C                                     |
| Ambient temperature, storage  | -40 °C ... +70 °C                                     |
| Typ. Ambient light immunity   | Artificial light: ≤ 5,000 lx<br>Sunlight: ≤ 60,000 lx |

## FIBER-OPTIC SENSORS - GLL170-P334S06

|                                     |   |
|-------------------------------------|---|
| Shock resistance                    | 50 g, 11 ms (3 positive and 3 negative shocks along X, Y, Z axes, 18 total shocks (EN60068-2-27)) |
| Vibration resistance                | 10 Hz ... 55 Hz (Amplitude 1 mm, 3 x 30 min (EN60068-2-6))  |
| Air humidity                        | 35 % ... 95 %, relative humidity (no condensation)  |
| Electromagnetic compatibility (EMC) | EN 60947-5-2  |
| UL File No.                         | NRKH2.E300503 & NRKH8.E300503   |
| RoHS certificate                    | ✓   |


### SMART TASK

|                |   |
|----------------|---|
| Timer function | Deactivated<br>Switch-on delay<br>Off delay<br>Impulse (one shot) |
|----------------|---|

### CERTIFICATES


|   |   |
|---|---|
| EU declaration of conformity                        | ✓ |
| UK declaration of conformity                        | ✓ |
| ACMA declaration of conformity                      | ✓ |
| Moroccan declaration of conformity                  | ✓ |
| China RoHS  | ✓ |
| China Compulsory Product Certification (CCC) exempt | ✓ |
| cRUus certificate                                   | ✓ |

### ADJUSTMENTS GLL170

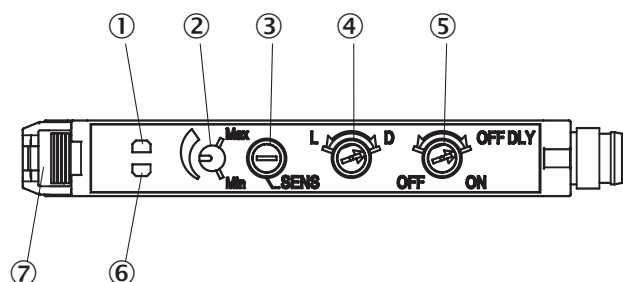


- ① LED indicator orange, lights up when switching output is active
- ② Sensitivity scale 230°
- ③ Sensitivity control: potentiometer, 8 turns
- ④ Selector switch: "L.ON" ( light switching) / "D.ON" ( dark switching)
- ⑤ OFF delay selector switch: "ON" (on) / "OFF" (off), 40 ms fixed
- ⑥ LED signal strength indicator green, lights up, when light received < 0.9 or > 1.1 (switching threshold = 1)
- ⑦ Locking the fiber-optic cables

### CONNECTION DIAGRAM CD-066



**DIMENSIONAL DRAWING**

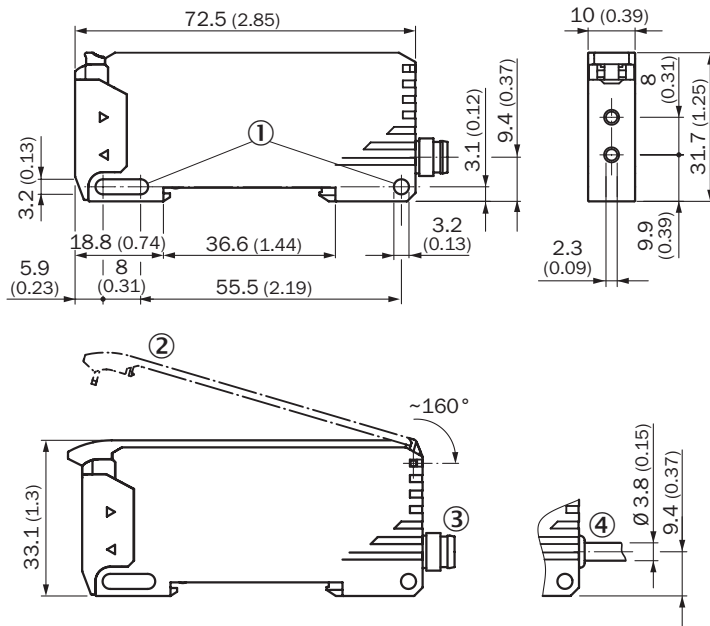

Dimensions in mm (inch)

- ① Mounting holes
- ② protective hood (optional), opens approx. 160°
- ③ Connector M8
- ④ cable

Further information as well as suitable accessories, example applications and downloads such as CAD dimensional models, operating instructions and software can be found at [www.sick.com/6071258](http://www.sick.com/6071258)



SICK AG  
WALDKIRCH  
GERMANY  
SICK.COM

# SICK AT A GLANCE

SICK is a leading global technology company for intelligent sensors and integrated solutions in industrial automation. Our technologies set benchmarks, making your industrial processes more efficient, safer and more sustainable – both in logistics and manufacturing operations.

SICK combines sensor intelligence with industry expertise and certified consulting services. We provide the ideal foundation for scalable as well as tailor-made automation solutions and create added value along the entire value chain. Our close partnerships with our customers are more than just a promise: Together, we optimize productivity, improve quality, protect health and safety, and help build a sustainable future. All with empathy and trust.

Since 1946, we have been developing innovative technologies with passion and a pioneering spirit. With a global network in around 40 countries, SICK has a global presence and is always close by. The company's headquarters are located in Waldkirch near Freiburg, Germany. Our customers benefit from our understanding of both local and global requirements, which enables us to deliver tailor-made solutions

**SICK**  
Sensor Intelligence