

OPERATING INSTRUCTIONS

SOPAS ET 3.0

Connection establishment
Information on using the program



SOPAS ENGINEERING TOOL

Copyright 2000-2014, SICK AG
All rights reserved

SICK
Sensor Intelligence.

SICK
Sensor Intelligence.

Document Information

Described Product

Product name: SOPAS ET 3.0

Document ID

Title: Operating Instructions SOPAS ET 3.0
Part No.: 8017707
Version: 1-0
Release: 2016-05

Manufacturer

SICK Engineering GmbH
Bergener Ring 27 · D-01458 Ottendorf-Okrilla · Germany
Phone: +49 35 20552410
Fax: +49 35 20552450
E-mail: info.pa@sick.de

Original Documents

The English version 8017707 of this document is an original document from SICK Engineering GmbH.
SICK Engineering GmbH assumes no liability for the correctness of an unauthorized translation.
Please contact SICK Engineering GmbH or your local representative in case of doubt.

Legal Information

Subject to change without notice.

© SICK Engineering GmbH. All rights reserved.

Glossary

AC	Alternating Current
ATEX	ATEX: Atmosphères Explosifs: Abbreviation for European standards that govern safety in potentially explosive atmospheres
CSA	Canadian Standards Association (www.csa.ca)
DC	Direct Current
HF	High Frequency, e. g., HF pulses (high frequency pulses)
IEC	International Electronical Commission
IECEx	IEC system for certification in accordance with standards for devices for use in potentially explosive atmospheres
IP _{xy}	Ingress Protection: Degree of protection of a device in accordance with IEC/DIN EN 60529; x specifies the protection against contact and impurities, y protection against moisture.
LF	Low Frequency, e. g., LF pulses (low-frequency pulses)
MDR	Manufacturer Data Record
NAMUR	Abbreviation for "Normen-Arbeitsgemeinschaft für Mess- und Regeltechnik in der chemischen Industrie", now "Interessengemeinschaft Automatisierungstechnik der Prozessindustrie" (www.namur.de)

Warning Symbols



IMMEDIATE HAZARD
of severe injuries or death



Hazard (general)



Hazard by electrical voltage



Hazard in potentially explosive atmospheres



Hazard by explosive substances/mixtures



Hazard by unhealthy substances



Hazard by toxic substances

Information Symbols



Information on product condition with regard to
protection against explosions (general)



Information on product characteristics related to
European Directive ATEX



Information on product characteristics related to
explosion protection in accordance with the IECEx
scheme.



Important technical information for this product



Important information on electric or electronic
functions



Nice to know



Supplementary information



Link referring to information at another place

Warning Levels / Signal Words

DANGER

Risk or hazardous situation which *will* result in severe personal
injury or death.

WARNING

Risk or hazardous situation which *could* result in severe personal
injury or death.

CAUTION

Hazard or unsafe practice which *could* result in personal injury or
property damage.

NOTICE

Hazards which *could* result in property damage

1	Important Information	1
1.1	About this document	2
1.2	For your safety	2
1.3	System requirements	2
2	Connection establishment	3
2.1	Connecting to the device	4
2.1.1	Changing the language	4
2.1.2	Connecting to the device via the “Device family” mode (recommended search settings)	5
2.1.3	Connecting to the device with advanced mode	7
3	Information on using the program	11
3.1	Device selection	13
3.2	Device context menu	14

SOPAS ET 3.0

1 Important Information

About this document

For your safety

System requirements

1.1 About this document

This document provides basic information on the software SOPAS ET V3.0.

1.2 For your safety.



NOTICE:

- ▶ Read the corresponding Operating Instructions carefully before using a device.
- ▶ Special attention must be paid to all safety instructions and warnings for assembly, installation and operation of the device!

1.3 System requirements

Laptop/PC with:

- Processor: Pentium III (or comparable type)
- VGA graphics card
- USB interface (alternative - RS232 via adapter)
- Working memory (RAM): At least 1 GB
- Operating system: MS Windows XP, Vista, Windows 7 and Windows 8 (32/64 bit)

SOPAS ET 3.0

2 Connection establishment

Connecting to the device
Changing the language

2.1

Connecting to the device

- ▶ Connect the USB cable to the MCU control unit and the laptop/PC.

**NOTICE:**

The MCU(P) is connected via USB to the laptop/PC.

A serial interface (COM port) is simulated via which the connection is made.

- ▶ Start the program in the “SICK\SOPAS” start menu.
- ▶ The start page is displayed.


2.1.1

Changing the language

- ▶ If required, select the desired language in the “Tools / Language” menu (→ pg. 4, Fig. 1).
- ▶ Confirm the dialog shown with “Yes” to restart SOPAS ET with the changed language.

Fig. 1


Changing the language

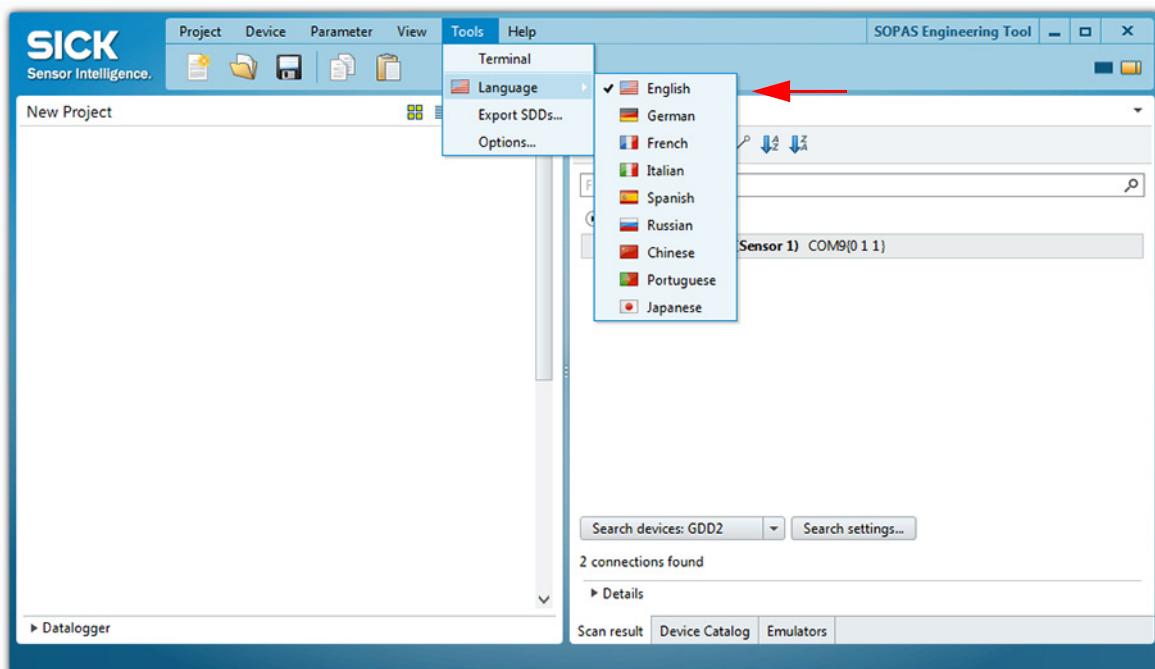

2.1.2 Connecting to the device via the “Device family” mode (recommended search settings)


- 1 Click “Search settings”.
- 2 Select search mode “Device family oriented search” and click “Next”.

Fig. 2 Selecting the search mode

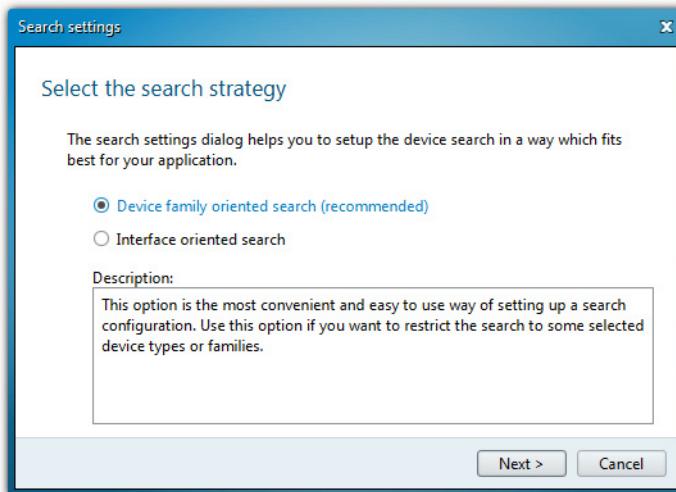

- 3 Select device family “MCU” and click “Next”.

Fig. 3 Selecting the device family

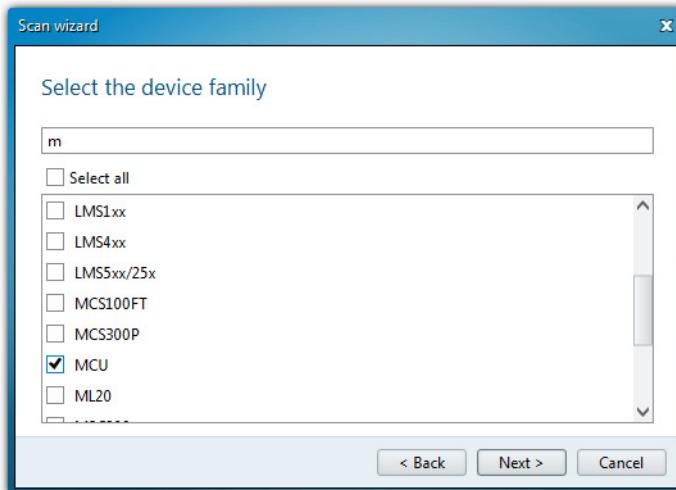

- 4 If devices are to be connected via Ethernet, configure the IP addresses:



NOTICE:

MCU(P) does not support automatic recognition of IP addresses (SICK AutoIP), the IP addresses therefore have to be configured manually.

- Click “Add”.




An IP address specified by the customer is entered at the factory if the address is available when the device is ordered. If not, standard address 192.168.0.10 is entered.

- ▶ Enter the IP address of the device or the IP address range when several devices are used and confirm with “OK” (→ pg. 6, Fig. 4). The IP addresses shown are exemplary.
- ▶ Click “OK”.

Fig. 4

Connection settings for connection via Ethernet (example)

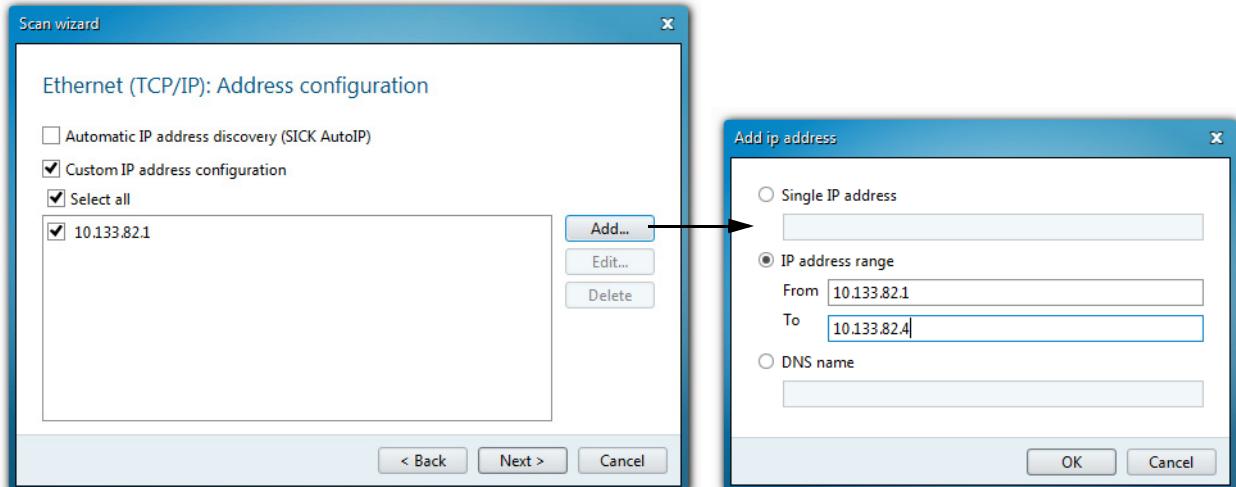

- 5 Click “Next”.
- 6 When devices are connected via serial connections (COM ports), select the COM ports used and click “Next”.

**NOTICE:**


The MCU(P) is connected via USB to the laptop/PC.

A serial interface (COM port) is simulated via which the connection is made.

- ▶ If you are not sure which COM ports are used, select all COM ports.

Fig. 5


Selecting COM ports

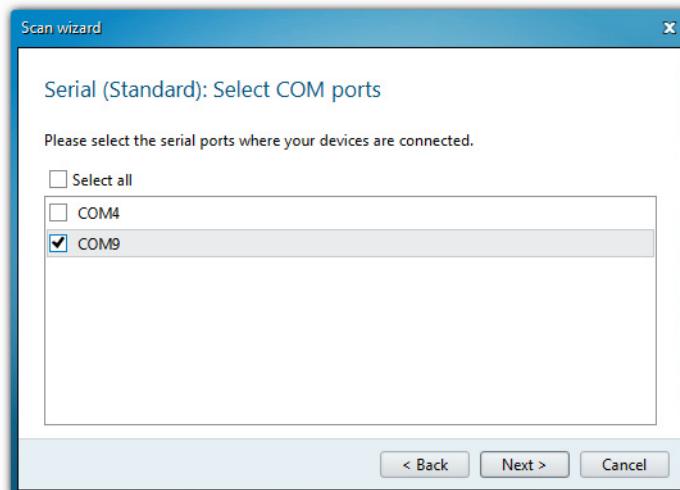

- 7 To save the search settings, enter a name and click “Finish”.
SOPAS ET starts the device search.
The devices found are displayed in the “Device search” area when device search is finished (→ pg. 12, Fig. 12).

Fig. 6

Saving the scan settings

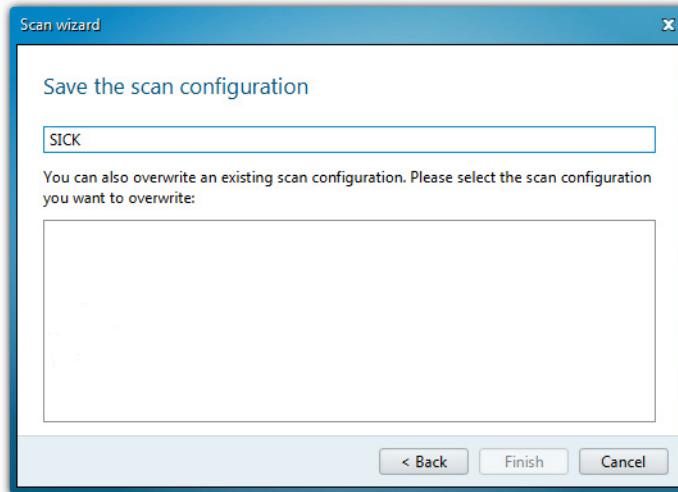


2.1.3

Connecting to the device with advanced mode

- 1 Click “Search settings”.
- 2 Select search mode “Interface oriented search”.
- 3 Select the communication interfaces where the search is to be made and click “Next”.

Fig. 7

Selecting the communication components

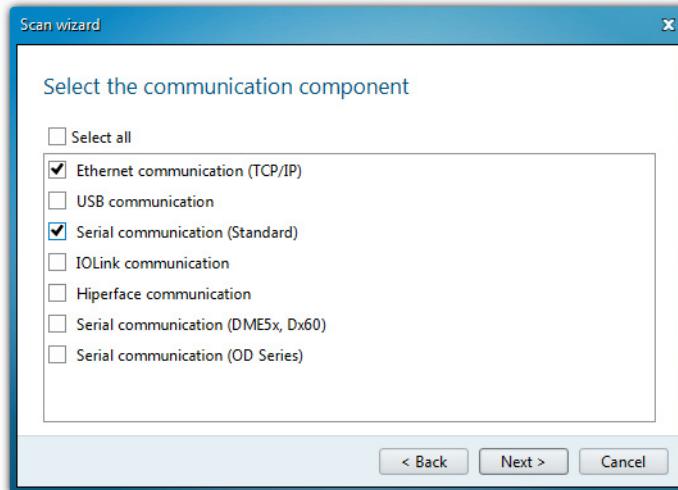


- 4 Configure the interfaces and click “Next”.

Ethernet communication

- ▶ Select “Custom IP address configuration”.
- ▶ Click “Add”.
- ▶ Enter the IP address of the device or the IP address range when several devices are used and confirm with “OK”.
- ▶ Select TCP port 2111 in the “TCP port” directory.
- ▶ Define the protocol settings in the “Protocol” directory according to → pg. 8, Fig. 8.

Fig. 8


Defining the protocol settings

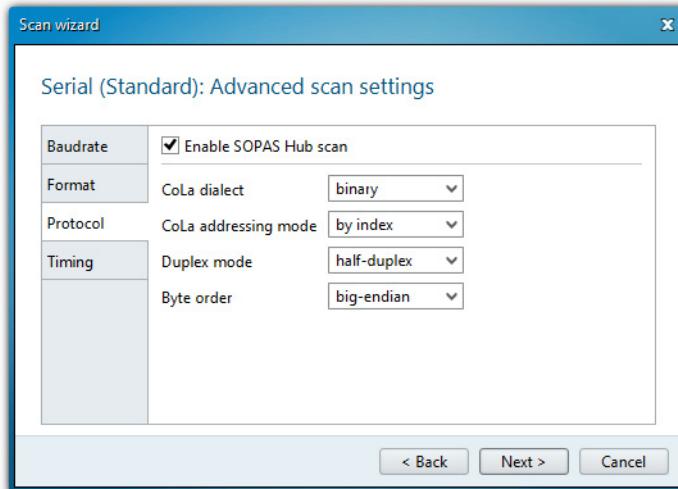

- ▶ Define the timeout settings in the “Timing” directory according to → Fig. 9.

Fig. 9

Defining the timeout settings

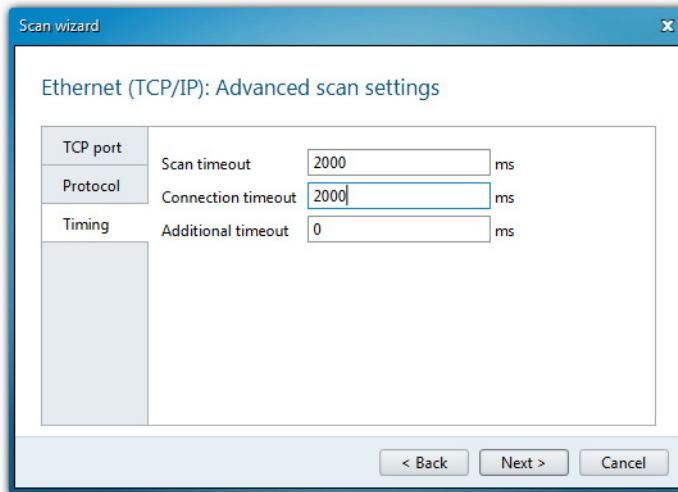

Serial communication (when connected via USB)**NOTICE:**


The MCU is connected via USB to the laptop/PC.

A serial interface (COM port) is simulated via which the connection is made.

- ▶ Select the COM ports used.
- ▶ If you are not sure which COM ports are used, select all COM ports.
- ▶ Define the baudrate settings in the “Baudrate” directory according to → pg. 9, Fig. 10.

Fig. 10


Defining the baudrate

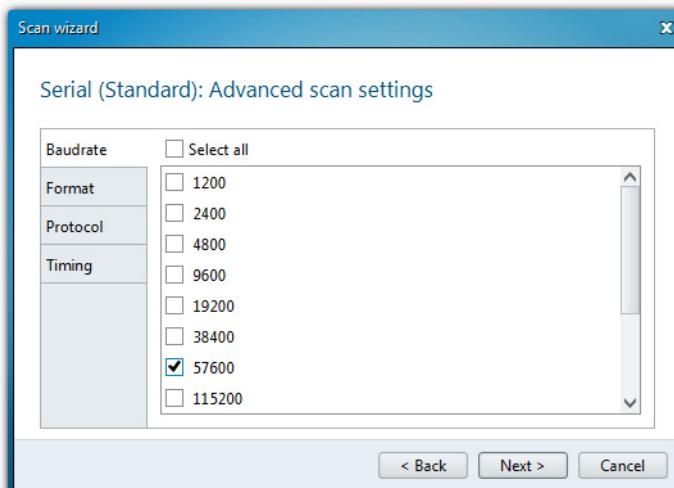

- ▶ Configure the data format in the “Format” directory according to → pg. 9, Fig. 11.

Fig. 11

Configuring the data format

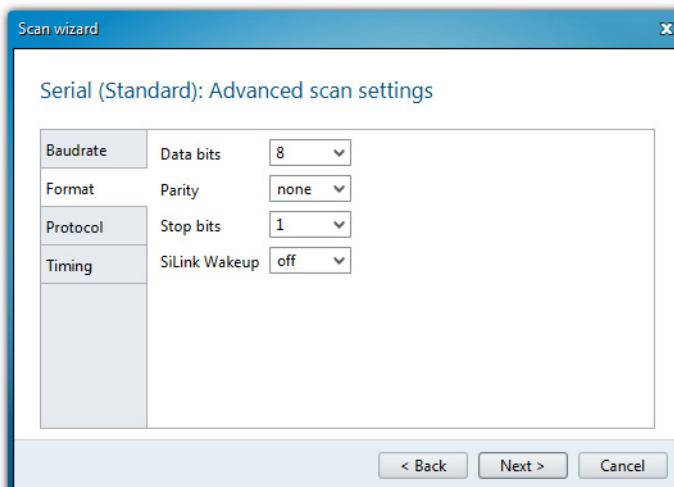

- ▶ Define the protocol settings in the “Protocol” directory according to → pg. 7, Fig. 7.
- ▶ Define the timeout settings in the “Timing” directory according to → pg. 8, Fig. 8.


5 To save the scan settings, enter a name and click “Finish” (→ pg. 7, Fig. 6).
 SOPAS ET starts the device search. The devices found are displayed in the “Device search” area when device search is finished (→ pg. 12, Fig. 12).

SOPAS ET 3.0

3 Information on using the program

Overview
Device selection
Device context menu

Fig. 12 Overview

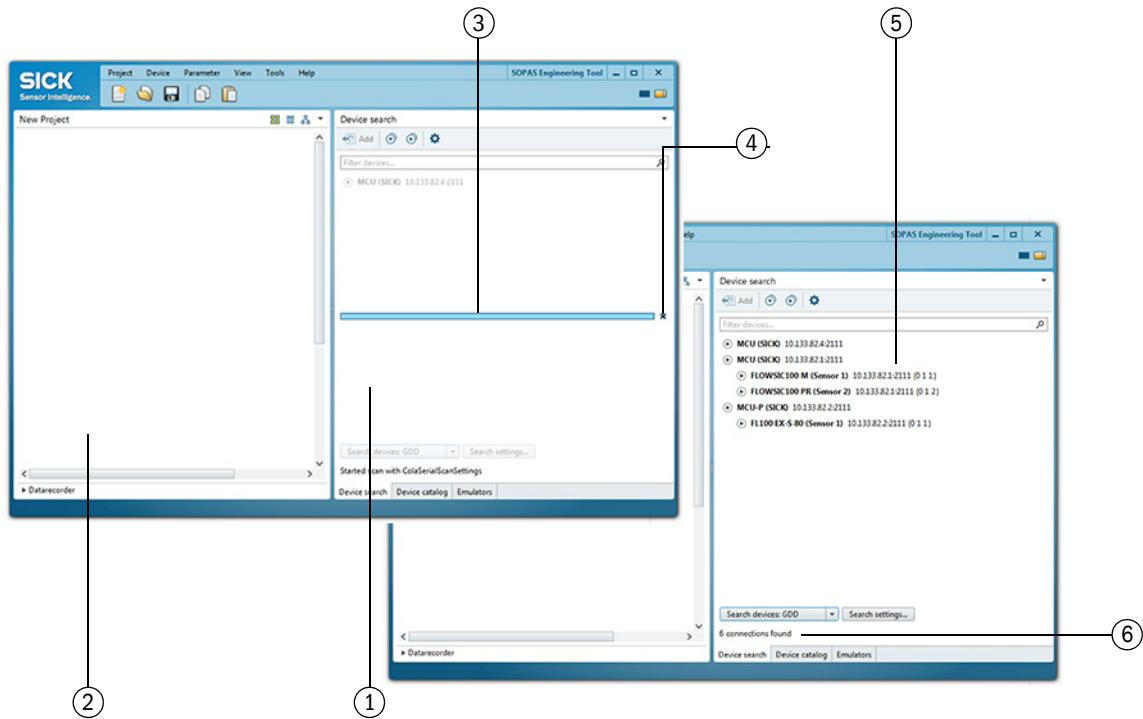

1 Device search
 2 Project area
 3 Device search progress

4 Device search abort
 5 Device search result
 6 Number of devices found


3.1

Device selection

- Move the required devices with drag-and-drop or a double-click on the required device into the project area.
 - The configuration of the devices is shown in a separate device window.
 - The device windows can be opened by a double-click on the respective device file or the context menu (→ pg. 14, Fig. 14).

Fig. 13

Device selection

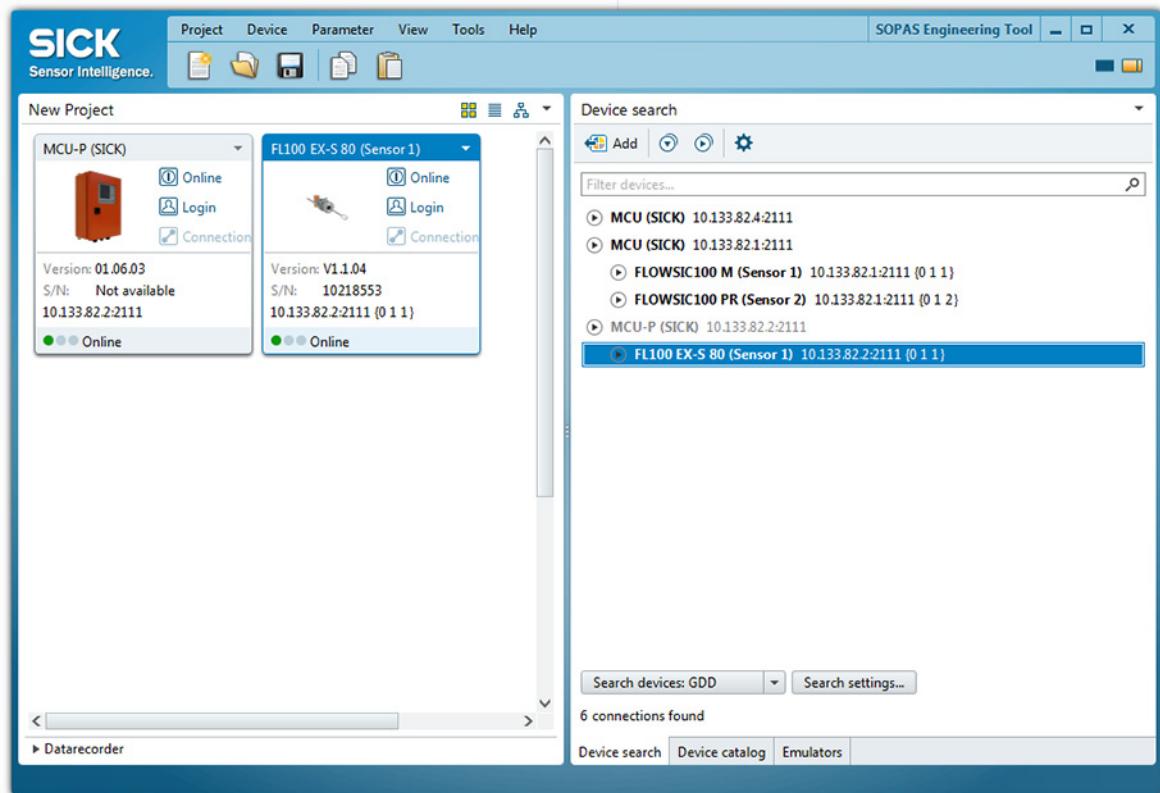

3.2

Device context menu

Fig. 14

Device context menu

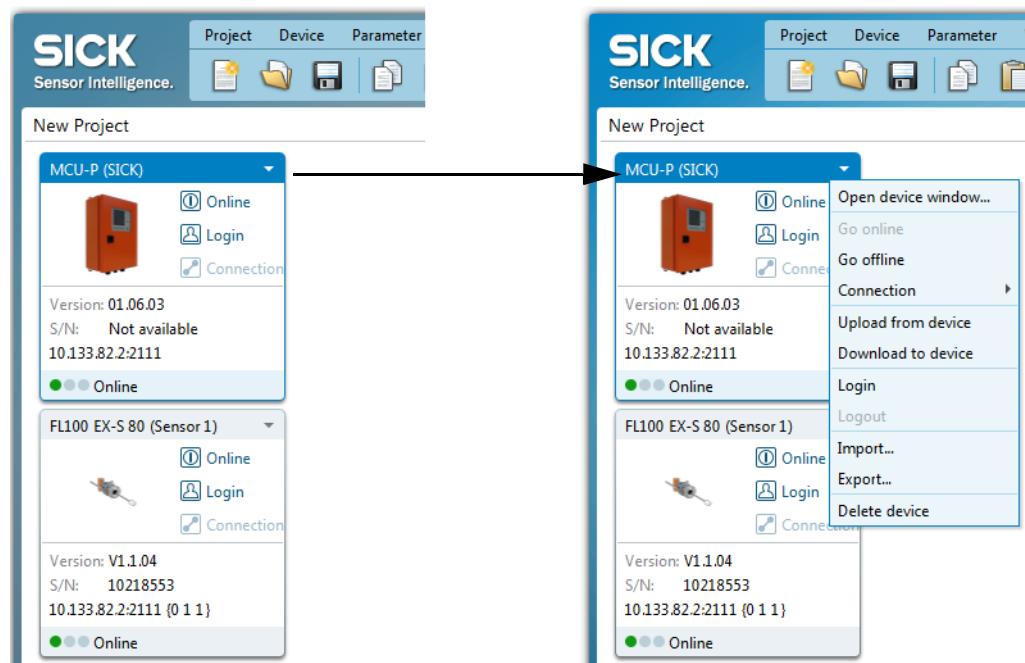


Table 1

Contents of device context menu

Context menu	Description
Go online	Establishes the connection between SOPAS ET and the device.
Go offline	Interrupts the connection between SOPAS ET and the device.
Connection	<ul style="list-style-type: none"> - Select Connection: Changes the connection settings. - Deselect Connection: Deletes the connection settings.
Upload from device	Uploads all parameter values from the connected device and transfers them to SOPAS ET.
Download to device	Downloads the parameter values from SOPAS ET to the connected device. Only those parameter values are downloaded which can be written at the currently logged in user level.
Login	Opens the login dialog.
Logout	Logs out the user from the device.
Import	Imports a suitable device from the *.sopas file and overwrites the parameter values with the values saved in the *.sopas file. During import to an online device, the parameters are immediately written to the device. Only those parameter values are written which can be written at the currently logged in user level.
Export	Exports the device information and the associated project information and saves them in a *.sopas file.
Delete device	Deletes the device from the project.

Australia
Phone +61 3 9457 0600
1800 334 802 – tollfree
E-Mail sales@sick.com.au

Austria
Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Belgium/Luxembourg
Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brazil
Phone +55 11 3215-4900
E-Mail marketing@sick.com.br

Canada
Phone +1 905 771 14 44
E-Mail information@sick.com

Czech Republic
Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

Chile
Phone +56 2 2274 7430
E-Mail info@schadler.com

China
Phone +86 4000 121 000
E-Mail info.china@sick.net.cn

Denmark
Phone +45 45 82 64 00
E-Mail sick@sick.dk

Finland
Phone +358-9-2515 800
E-Mail sick@sick.fi

France
Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Germany
Phone +49 211 5301-301
E-Mail info@sick.de

Great Britain
Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

Hong Kong
Phone +852 2153 6300
E-Mail ghk@sick.com.hk

Hungary
Phone +36 1 371 2680
E-Mail office@sick.hu

India
Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel
Phone +972-4-6881000
E-Mail info@sick-sensors.com

Italy
Phone +39 02 27 43 41
E-Mail info@sick.it

Japan
Phone +81 (0)3 5309 2112
E-Mail support@sick.jp

Malaysia
Phone +603 808070425
E-Mail enquiry.my@sick.com

Netherlands
Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

New Zealand
Phone +64 9 415 0459
0800 222 278 – tollfree
E-Mail sales@sick.co.nz

Norway
Phone +47 67 81 50 00
E-Mail sick@sick.no

Poland
Phone +48 22 837 40 50
E-Mail info@sick.pl

Romania
Phone +40 356 171 120
E-Mail office@sick.ro

Russia
Phone +7-495-775-05-30
E-Mail info@sick.ru

Singapore
Phone +65 6744 3732
E-Mail sales.gsg@sick.com

Slovakia
Phone +421 482 901201
E-Mail mail@sick-sk.sk

Slovenia
Phone +386 (0)1-47 69 990
E-Mail office@sick.si

South Africa
Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea
Phone +82 2 786 6321
E-Mail info@sickkorea.net

Spain
Phone +34 93 480 31 00
E-Mail info@sick.es

Sweden
Phone +46 10 110 10 00
E-Mail info@sick.se

Switzerland
Phone +41 41 619 29 39
E-Mail contact@sick.ch

Taiwan
Phone +886 2 2375-6288
E-Mail sales@sick.com.tw

Thailand
Phone +66 2645 0009
E-Mail tawiat@sicksgp.com.sg

Turkey
Phone +90 (216) 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates
Phone +971 (0) 4 88 65 878
E-Mail info@sick.ae

USA/Mexico
Phone +1(952) 941-6780
1 (800) 325-7425 – tollfree
E-Mail info@sick.com

Vietnam
Phone +84 8 62920204
E-Mail Ngo.Duy.Linh@sicksgp.com.sg

More representatives and agencies
at www.sick.com