

## DFS60B-BJPC10000

DFS60

**INCREMENTAL ENCODERS** 





#### Ordering information

Туре	part no.
DFS60B-BJPC10000	1036780

Other models and accessories → www.sick.com/DFS60

Illustration may differ



#### Detailed technical data

#### Safety-related parameters

MTTF <sub>D</sub> (mean time to dangerous failure) 300 years (EN ISO 13849-1) 1)
--

<sup>1)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40°C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

#### Performance

Pulses per revolution	10,000 <sup>1)</sup>
Measuring step	90°, electric/pulses per revolution
Measuring step deviation at non binary number of lines	± 0.01°
Error limits	± 0.05°

 $<sup>^{1)}</sup>$  See maximum revolution range.

#### Interfaces

Communication interface	Incremental
Communication Interface detail	TTL/HTL
Factory setting	Factory setting: output level TTL
Number of signal channels	6-channel
Programmable/configurable	✓
Initialization time	32 ms, 30 ms <sup>1)</sup>
Output frequency	≤ 600 kHz
Load current	≤ 30 mA
Power consumption	≤ 0.7 W (without load)

 $<sup>^{1)}</sup>$  With mechanical zero pulse width.

#### **Electronics**

Connection type	Male connector, M12, 8-pin, radial
Supply voltage	4.5 32 V
Reference signal, number	1
Reference signal, position	90°, electric, logically gated with A and B
Reverse polarity protection	✓
Short-circuit protection of the outputs	✓ <sup>1) 2)</sup>

 $<sup>^{1)}</sup>$  Programming TTL with  $\geq$  5.5 V: short-circuit opposite to another channel or GND permissable for maximum 30 s.

#### Mechanics

Mechanical design	Blind hollow shaft
Shaft diameter	5/8" Front clamp
Weight	+ 0.2 kg
Shaft material	Stainless steel
Flange material	Aluminum
Housing material	Aluminum die cast
Start up torque	0.8 Ncm (+20 °C)
Operating torque	0.6 Ncm (+20 °C)
Permissible movement static	± 0.3 mm (radial) ± 0.5 mm (axial)
Permissible movement dynamic	± 0.1 mm (radial) ± 0.2 mm (axial)
Operating speed	≤ 6,000 min <sup>-1 1)</sup>
Moment of inertia of the rotor	40 gcm <sup>2</sup>
Bearing lifetime	3.6 x 10^10 revolutions
Angular acceleration	≤ 500,000 rad/s²

 $<sup>^{1)}</sup>$  Allow for self-heating of 3.3 K per 1,000 rpm when designing the operating temperature range.

#### Ambient data

ЕМС	According to EN 61000-6-2 and EN 61000-6-3
Enclosure rating	IP67, Housing side, male connector (IEC 60529) <sup>1)</sup> IP65, shaft side (IEC 60529)
Permissible relative humidity	90 % (Condensation not permitted)
Operating temperature range	-40 °C +100 °C <sup>2)</sup> -30 °C +100 °C <sup>3)</sup>
Storage temperature range	-40 °C +100 °C, without package
Resistance to shocks	70 g, 6 ms (EN 60068-2-27)
Resistance to vibration	30 g, 10 Hz 2,000 Hz (EN 60068-2-6)

<sup>&</sup>lt;sup>1)</sup> With mating connector fitted.

#### Certificates

EU declaration of conformity	1
------------------------------	---

<sup>&</sup>lt;sup>2)</sup> Programming HTL or TTL with < 5.5 V: short-circuit opposite to another channel, US or GND permissable for maximum 30 s.

<sup>&</sup>lt;sup>2)</sup> Stationary position of the cable.

<sup>3)</sup> Flexible position of the cable.

## DFS60B-BJPC10000 | DFS60


### INCREMENTAL ENCODERS

UK declaration of conformity	✓
ACMA declaration of conformity	✓
Moroccan declaration of conformity	<b>√</b>
China RoHS	✓
cULus certificate	✓
Information according to Art. 3 of Data Act (Regulation EU 2023/2854)	<b>✓</b>

#### Classifications

ECLASS 5.0	27270501
ECLASS 5.1.4	27270501
ECLASS 6.0	27270590
ECLASS 6.2	27270590
ECLASS 7.0	27270501
ECLASS 8.0	27270501
ECLASS 8.1	27270501
ECLASS 9.0	27270501
ECLASS 10.0	27270501
ECLASS 11.0	27270501
ECLASS 12.0	27270501
ETIM 5.0	EC001486
ETIM 6.0	EC001486
ETIM 7.0	EC001486
ETIM 8.0	EC001486
UNSPSC 16.0901	41112113

#### Dimensional drawing Blind hollow shaft, radial male connector M12 and M23

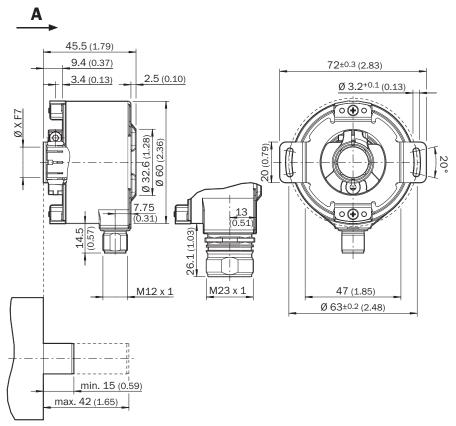


Dimensions in mm (inch)

General tolerances according to DIN ISO 2768-mk

TypeBlind hollow shaft	Shaft diameter XF7	Shaft diameter xj7
DFS60x-BAxxxxxxxx	6 mm	Provided by customer
DFS60x-BBxxxxxxxx	8 mm	
DFS60x-BCxxxxxxxx	3/8″	
DFS60x-BDxxxxxxxxx	10 mm	
DFS60x-BExxxxxxxx	12 mm	
DFS60x-BFxxxxxxxxx	1/2"	
DFS60x-BGxxxxxxxx	14 mm	
DFS60x-BHxxxxxxxxx	15 mm	
DFS60x-BJxxxxxxxxx	5/8″	

#### PIN assignment




view of M12 male device connector on encoder


PINMale connec- tor M12, 8-pin	PINMale connector M23, 12-pin	Wire colors (ca- ble connection)	TTL/HTL signal	Sin/Cos 1.0 V <sub>PP</sub>	Explanation
1	6	Brown	_A	COS-	Signal wire
2	5	White	A	COS+	Signal wire
3	1	Black	_в	SIN-	Signal wire
4	8	Pink	В	SIN+	Signal wire
5	4	Yellow	_Z	_Z	Signal wire
6	3	Purple	Z	Z	Signal wire
7	10	Blue	GND	GND	Ground connection
8	12	Red	+U <sub>S</sub>	+U <sub>S</sub>	Supply voltage
-	9	-	N.c.	N.c.	Not assigned
-	2	-	N.c.	N.c.	Not assigned
-	11	-	N.c.	N.c.	Not assigned
-	7 1)	Orange	0-SET 1)	N.c.	Set zero pulse <sup>1)</sup>
Screen	Screen	Screen	Screen	Screen	Screen connect- ed to housing on encoder side. Con- nected to ground on control side.

<sup>&</sup>lt;sup>1)</sup>For electrical interfaces only: M, U, V, W with 0-SET function on PIN 7 on M23 plug. The 0-SET input is used to set the zero pulse to the current shaft position. If the 0-SET input is applied to US for longer than 250 ms after it has previously been open or applied to GND for at least 1,000 ms, the current shaft position is assigned zero pulse signal "Z".

#### maximum revolution range

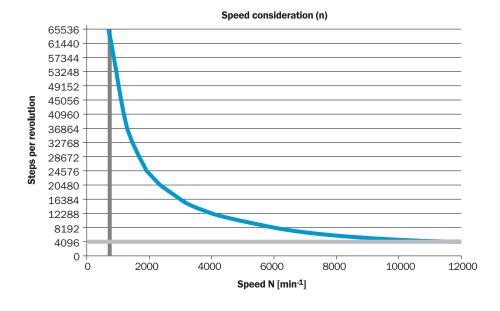


Diagrams Electrical zero pulse width can be configured to  $90^{\circ}$ ,  $180^{\circ}$ , or  $270^{\circ}$ . Width of the zero pulse in relation to a pulse period.

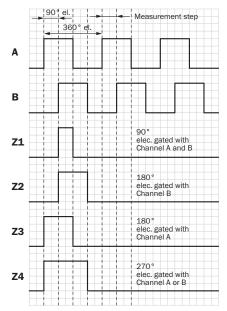

Cw with view on the encoder shaft in direction "A", compare dimensional drawing.

Supply voltage	Output	
4,5 V 32 V	TTL/HTL programmable	

Diagrams Mechanical zero pulse width 1° to 359° programmable. Width of the zero pulse in relation to a mechanical revolution of the shaft.

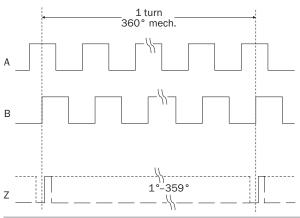

Supply voltage	Output	
4,5 V 32 V	TTL/HTL programmable	

#### Recommended accessories

Other models and accessories → www.sick.com/DFS60

	Brief description	Туре	part no.	
Mounting syst	Mounting systems			
	Product family: Stator couplings     Description: Standard stator coupling	BEF-DS00XFX	2056812	
	<ul> <li>Description: Clamping ring for metal hollow shaft</li> <li>Material: Steel</li> <li>Details: Metal</li> </ul>	BEF-KR-M	2064709	

	Brief description	Туре	part no.	
shaft adaptation				
	<ul> <li>Product segment: Shaft adaptation</li> <li>Product: Collets</li> <li>Description: Collet plastic (PEEK) insulated for hollow shaft, shaft diameter 6 mm, outer diameter 5/8" (15.875 mm)</li> </ul>	SPZ-58Z-006-P	2076228	
To	<ul> <li>Product segment: Shaft adaptation</li> <li>Product: Collets</li> <li>Description: Collet metal for hollow shaft, shaft diameter 8 mm, outer diameter 5/8" (15.875 mm)</li> </ul>	SPZ-58Z-008-M	2076219	
	<ul> <li>Product segment: Shaft adaptation</li> <li>Product: Collets</li> <li>Description: Collet plastic (PEEK) insulated for hollow shaft, shaft diameter 8 mm, outer diameter 5/8" (15.875 mm)</li> </ul>	SPZ-58Z-008-P	2076229	
To	<ul> <li>Product segment: Shaft adaptation</li> <li>Product: Collets</li> <li>Description: Collet metal for hollow shaft, shaft diameter 10 mm, outer diameter 5/8" (15.875 mm)</li> </ul>	SPZ-58Z-010-M	2076220	
	Product segment: Shaft adaptation Product: Collets Description: Collet plastic (PEEK) insulated for hollow shaft, shaft diameter 10 mm, outer diameter 5/8" (15.875 mm)	SPZ-58Z-010-P	2076230	
To	<ul> <li>Product segment: Shaft adaptation</li> <li>Product: Collets</li> <li>Description: Collet metal for hollow shaft, shaft diameter 12 mm, outer diameter 5/8" (15.875 mm)</li> </ul>	SPZ-58Z-012-M	2076221	
	<ul> <li>Product segment: Shaft adaptation</li> <li>Product: Collets</li> <li>Description: Collet plastic (PEEK) insulated for hollow shaft, shaft diameter 12 mm, outer diameter 5/8" (15.875 mm)</li> </ul>	SPZ-58Z-012-P	2076231	
	<ul> <li>Product segment: Shaft adaptation</li> <li>Product: Collets</li> <li>Description: Collet metal for hollow shaft, shaft diameter 14 mm, outer diameter 5/8" (15.875 mm)</li> </ul>	SPZ-58Z-014-M	2076222	
	<ul> <li>Product segment: Shaft adaptation</li> <li>Product: Collets</li> <li>Description: Collet plastic (PEEK) insulated for hollow shaft, shaft diameter 14 mm, outer diameter 5/8" (15.875 mm)</li> </ul>	SPZ-58Z-014-P	2076232	
	<ul> <li>Product segment: Shaft adaptation</li> <li>Product: Collets</li> <li>Description: Collet metal for hollow shaft, shaft diameter 15 mm, outer diameter 5/8" (15.875 mm)</li> </ul>	SPZ-58Z-015-M	2076223	
	<ul> <li>Product segment: Shaft adaptation</li> <li>Product: Collets</li> <li>Description: Collet plastic (PEEK) insulated for hollow shaft, shaft diameter 15 mm, outer diameter 5/8" (15.875 mm)</li> </ul>	SPZ-58Z-015-P	2076233	
1	<ul> <li>Product segment: Shaft adaptation</li> <li>Product: Collets</li> <li>Description: Collet metal for hollow shaft, shaft diameter 1/2" (12.7 mm), outer diameter 5/8" (15.875 mm)</li> </ul>	SPZ-58Z-12Z-M	2076225	
1	Product segment: Shaft adaptation Product: Collets  Description: Collet plastic (PEEK) insulated for hollow shaft, shaft diameter 1/2" (12.7 mm), outer diameter 5/8" (15.875 mm)	SPZ-58Z-12Z-P	2076227	
10	<ul> <li>Product segment: Shaft adaptation</li> <li>Product: Collets</li> <li>Description: Collet metal for hollow shaft, shaft diameter 3/8" (9.525 mm), outer diameter 5/8" (15.875 mm)</li> </ul>	SPZ-58Z-38Z-M	2076224	
	<ul> <li>Product segment: Shaft adaptation</li> <li>Product: Collets</li> <li>Description: Collet plastic (PEEK) insulated for hollow shaft, shaft diameter 3/8" (9.525 mm), outer diameter 5/8" (15.875 mm)</li> </ul>	SPZ-58Z-38Z-P	2076226	

# **DFS60B-BJPC10000 | DFS60**INCREMENTAL ENCODERS

	Brief description	Туре	part no.	
programming	programming devices			
A	Product segment: Programming devices Product family: PGT-10 Pro  Description: Programming unit display for programmable SICK DFS60, DFV60, AFS/AFM60, AHS/AHM36 encoders, and wire draw encoder with DFS60, AFS/AFM60 and AHS/AHM36. Compact dimensions, low weight, and intuitive operation.  Items supplied: 1 x PGT-10-Pro stand-alone programming tool,4 x alkaline type batteries, 1.5 V Mignon (AA)	PGT-10-Pro	1072254	
	Product segment: Programming devices Product family: PGT-08-S Description: USB programming unit, for programmable SICK encoders AFS60, AFM60, DFS60, VFS60, DFV60 and wire draw encoders with programmable encoders. Not compatible with the portable SOPAS ET versions.	PGT-08-S	1036616	

	Brief description	Туре	part no.	
connectors an	connectors and cables			
C. P.	Connection type head A: Female connector, M12, 8-pin, straight Connection type head B: Male connector, D-Sub, 9-pin, straight Signal type: Incremental Cable: 0.5 m, 8-wire Description: Incremental, shielded Note: Programming adapter cable for programming tool PGT-10-Pro and PGT-08-S	DSL-2D08-G0M5AC3	2046579	
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Incremental, SSI</li> <li>Cable: 2 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded, SSI</li> <li>Connection systems: Flying leads</li> </ul>	DOL-1208-G02MAC1	6032866	
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Incremental, SSI</li> <li>Cable: 5 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded, SSI</li> <li>Connection systems: Flying leads</li> </ul>	DOL-1208-G05MAC1	6032867	
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Incremental, SSI</li> <li>Cable: 10 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded, SSI</li> <li>Connection systems: Flying leads</li> </ul>	DOL-1208-G10MAC1	6032868	
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Incremental, SSI</li> <li>Cable: 20 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded, SSI</li> <li>Connection systems: Flying leads</li> </ul>	DOL-1208-G20MAC1	6032869	
	Connection type head A: Female connector, M12, 8-pin, straight, A-coded Signal type: Incremental, SSI Cable: CAT5, CAT5e Description: Incremental, shieldedSSI Connection systems: IDC quick connection Permitted cross-section: 0.14 mm² 0.34 mm²	DOS-1208-GA01	6045001	
	Connection type head A: Female connector, M12, 8-pin, angled Connection type head B: Flying leads Signal type: HIPERFACE®, Incremental Cable: 2 m, 8-wire, PUR, halogen-free Description: HIPERFACE®, shielded, Incremental	DOL-1208-W02MAC1	6037724	
	Connection type head A: Female connector, M12, 8-pin, angled Connection type head B: Flying leads Signal type: HIPERFACE®, Incremental Cable: 5 m, 8-wire, PUR, halogen-free Description: HIPERFACE®, shielded, Incremental	DOL-1208-W05MAC1	6037725	
	Connection type head A: Female connector, M12, 8-pin, angled Connection type head B: Flying leads Signal type: HIPERFACE®, Incremental Cable: 10 m, 8-wire, PUR, halogen-free Description: HIPERFACE®, shielded, Incremental	DOL-1208-W10MAC1	6037726	
	Connection type head A: Female connector, M12, 8-pin, angled Connection type head B: Flying leads Signal type: HIPERFACE <sup>®</sup> , Incremental Cable: 20 m, 8-wire, PUR Description: HIPERFACE <sup>®</sup> , shielded, Incremental	DOL-1208-W20MAC1	6037727	
	Connection type head A: Female connector, M12, 8-pin, angled Connection type head B: Flying leads Cable: 2 m, 8-wire, PVC Description: Shielded Connection systems: Flying leads	DOL-1208-W02MA	6020992	
119	<ul> <li>Connection type head A: Female connector, M12, 8-pin, angled</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 2 m, 8-wire, PUR, halogen-free</li> </ul>	DOL-1208- W02MAS01	6029224	

# **DFS60B-BJPC10000 | DFS60**INCREMENTAL ENCODERS

	Brief description	Туре	part no.
	Description: Sensor/actuator cable, shielded     Connection systems: Flying leads		
>	<ul> <li>Connection type head A: Female connector, M12, 8-pin, angled</li> <li>Connection type head B: Flying leads</li> <li>Cable: 2 m, 8-wire, PUR, halogen-free</li> <li>Description: Unshielded</li> </ul>	DOL-1208-W02MC	6035623
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, angled</li> <li>Connection type head B: Flying leads</li> <li>Cable: 5 m, 8-wire, PVC</li> <li>Description: Shielded</li> <li>Connection systems: Flying leads</li> </ul>	DOL-1208-W05MA	6021033
3	<ul> <li>Connection type head A: Female connector, M12, 8-pin, angled</li> <li>Connection type head B: Flying leads</li> <li>Cable: 5 m, 8-wire, PUR</li> <li>Description: Unshielded</li> </ul>	DOL-1208-W05MC	6035624
>	<ul> <li>Connection type head A: Female connector, M12, 8-pin, angled</li> <li>Connection type head B: Flying leads</li> <li>Cable: 10 m, 8-wire, PUR, halogen-free</li> <li>Description: Unshielded</li> </ul>	DOL-1208-W10MC	6035625

### SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

### **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

