

# BTF08-K1EM02PP

HighLine

**WIRE DRAW ENCODERS** 





#### Ordering information

Туре	part no.
BTF08-K1EM02PP	1060964

Included in delivery: ACM60B-S1KE13x06 (1), MRA-F080-102D2 (1)

Other models and accessories → www.sick.com/HighLine



#### Detailed technical data

#### Safety-related parameters

MTTF <sub>D</sub> (mean time to dangerous failure)	600 years (EN ISO 13849-1) 1)

<sup>1)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40 °C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

#### Performance

Measurement range	0 m 2 m
Encoder	Absolute encoders
Resolution (wire draw + encoder)	0.02 mm <sup>1) 2)</sup>
Repeatability	≤ 1 mm <sup>3)</sup>
Linearity	≤ ± 2 mm <sup>3)</sup>
Hysteresis	≤ 2 mm <sup>3)</sup>

 $<sup>^{1)}</sup>$  The values shown have been rounded.

#### Interfaces

Communication interface	Analog / Current / 420 mA
Programmable/configurable	<b>√</b>

#### **Electronics**

Connection type	Male connector, M12, 5-pin, radial
Supply voltage	18 V DC 33 V DC
Operating current	≤ 80 mA (without load)

<sup>2)</sup> Example calculation based on the BTF08 with PROFINET: 200 mm (wire draw length per revolution - see Mechanical data): 262,144 (number of steps per revolution) = 0.001 mm (resolution of wire draw + encoder combination).

 $<sup>^{</sup>m 3)}$  Value applies to wire draw mechanism.

#### Mechanics

Weight	1.7 kg
Measuring wire material	Highly flexible stranded steel 1,4401 stainless steel V4A
Measuring wire diameter	1.35 mm
Weight (measuring wire)	7.1 g/m
Housing material, wire draw mechanism	Aluminum (anodized), aluminum die cast (nickel-plated)
Spring return force	6 N 14 N <sup>1)</sup>
Length of wire pulled out per revolution	200 mm
Life of wire draw mechanism	Typ. 1,000,000 cycles <sup>2) 3)</sup>
Actual wire draw length	2.2 m
Wire acceleration	40 m/s <sup>2</sup>
Operating speed	8 m/s
Mounted encoder	ACM60, ACM60B-S1KE13X06, 6045312
Mounted mechanic	MRA-F080-102D2, 6028625

 $<sup>^{1)}</sup>$  These values were measred at an ambient temperature of 25  $\,^{\circ}$  C. There may be variations at other temperatures.

#### Ambient data

EMC	According to EN 61000-6-2 and EN 61000-6-4
Enclosure rating	IP64, mounted mechanic IP67, Encoder (IEC 60529) 1)
Operating temperature range	-30 °C +70 °C

 $<sup>^{1)}</sup>$  With mating connector fitted.

#### Certificates

EU declaration of conformity	1
UK declaration of conformity	1
ACMA declaration of conformity	1
Moroccan declaration of conformity	1
China RoHS	✓

#### Classifications

ECLASS 5.0	27270590
ECLASS 5.1.4	27270590
ECLASS 6.0	27270590
ECLASS 6.2	27270590
ECLASS 7.0	27270590
ECLASS 8.0	27270590
ECLASS 8.1	27270590
ECLASS 9.0	27270590
ECLASS 10.0	27270613
ECLASS 11.0	27270503

<sup>2)</sup> Average values, which depend on the application.


<sup>3)</sup> The service life depends on the type of load. This is influenced by environmental conditions, the installation location, the measuring range in use, the traversing speed, and acceleration.

# BTF08-K1EM02PP | HighLine


WIRE DRAW ENCODERS

ECLASS 12.0	27270503
ETIM 5.0	EC001486
ETIM 6.0	EC001486
ETIM 7.0	EC001486
ETIM 8.0	EC001486
UNSPSC 16.0901	41112113


## Dimensional drawing

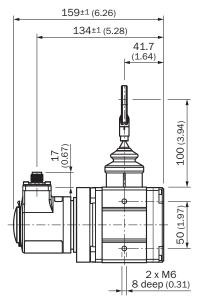

Dimensions in mm (inch)

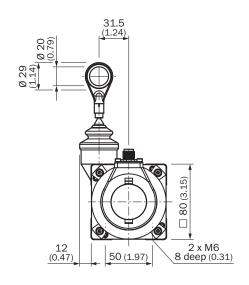

## Anschlussbelegung




- ① GND
- 2 + 24 V
- ③ Output signal GND
- 4 Output signal 4 ... 20 mA
- ⑤ N.C.

#### Diagrams Current output

#### Resolution ACM60



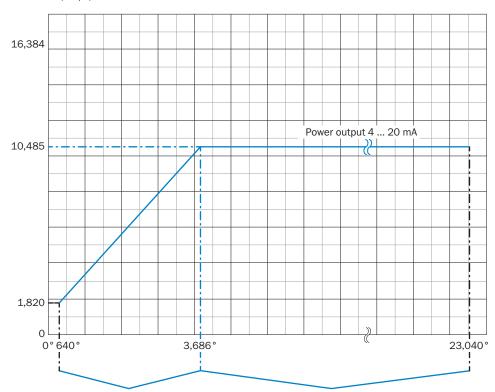

Programmable angle (degrees)

Calculation formula for number of steps in angle range

360°

Steps =  $\frac{Angle \times 1024}{2}$ 

Number of steps in angle range

Steps (0 ... 10 V) = 10485

#### Recommended accessories

Other models and accessories → www.sick.com/HighLine

	Brief description	Туре	part no.
Mounting systems			
0	Description: Joint ball for later insertion in wire end ring with 20 mm diameter. The use of this joint ball enables movement in multiple levels of freedom.	Joint protection for wire rope BTF/PRF/MRA	5318683
	Description: Compressed air attachment for MRA-F080 and MRA-F130 HighLine wire draw mechanism	MRA-F-P	6073769
	<ul> <li>Description: Flange adapter for HighLine wire draw mechanisms, adaption of face mount flange with centering hub 20 mm to 50 mm servo flange</li> <li>Material: Aluminum</li> <li>Details: Aluminum</li> <li>Items supplied: Including 3 countersunk screws M3 x 10</li> </ul>	BEF-FA-020-050WDE	2073776
	Description: Additional brush attachment for wire draw mechanism MRA-F080 (2 m and 3 m from HighLine series)	MRA-F080-B	6045341
	Description: Wire draw deflection pulley for wire draw mechanism MRA-F080 (2m and 3m from HighLine series)	MRA-F080-R	6028632
Wire draw mechanism			
	<ul> <li>Product segment: Wire draw mechanism</li> <li>Product family: Wire draw mechanism for wire draw encoders</li> <li>Description: HighLine wire draw mechanism for servo flange with 6 mm shaft, measuring range 0 m 2 m</li> <li>Items supplied: Without encoder</li> </ul>	MRA-F080-102D2	6028625

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

# **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

