

# RT-P1223

ZoneControl

**PHOTOELECTRIC SENSORS** 



# SCK (day

# Ordering information

Туре	part no.
RT-P1223	1063135

Other models and accessories → www.sick.com/ZoneControl

Illustration may differ



### Detailed technical data

### Features

Functional principle	Photoelectric proximity sensor
Functional principle detail	Background suppression
Dimensions (W x H x D)	20.6 mm x 99.2 mm x 48.9 mm
Sensing range max.	60 mm 900 mm
Sensing range	60 mm 900 mm
Focus	7°
Type of light	Infrared light
Light source	LED <sup>1)</sup>
Light spot size (distance)	Ø 20 mm (500 mm)
Angle of dispersion	7°
Adjustment	Potentiometer, 9 turns
Special applications	ZoneControl

 $<sup>^{1)}</sup>$  Average service life: 100,000 h at T<sub>U</sub> = +25 °C.

### Mechanics/electronics

Supply voltage U <sub>B</sub>	10 V DC 30 V DC <sup>1)</sup>
Ripple	< 5 V <sub>pp</sub> <sup>2)</sup>
Current consumption	20 mA <sup>3)</sup>
Switching output	PNP

<sup>&</sup>lt;sup>1)</sup> Limit values.

 $<sup>^{2)}\,\</sup>mbox{May}$  not fall below or exceed  $\mbox{U}_{\mbox{\scriptsize V}}$  tolerances.

 $<sup>^{</sup>m 3)}$  Without load and valve deenergized.

 $<sup>^{4)}</sup>$  Do not bend below 0 °C.

 $<sup>^{5)}</sup>$  A = V<sub>S</sub> connections reverse-polarity protected.

 $<sup>^{6)}</sup>$  C = interference suppression.

 $<sup>^{7)}</sup>$  D = outputs overcurrent and short-circuit protected.

Switching mode	Light switching
Signal voltage PNP HIGH/LOW	Approx. $V_S - 0.5 V / 0 V$
Output current I <sub>max.</sub>	≤ 100 mA
Response time	2 ms
Switching frequency	250 Hz
Connection type	Cable with M12 male connector, 4-pin, 300 mm <sup>4)</sup>
Circuit protection	A <sup>5)</sup> C <sup>6)</sup> D <sup>7)</sup>
Protection class	III
Weight	175 g
Housing material	Plastic, ABS
Enclosure rating	IP67
Shock and vibration resistance	According to IEC 68
Ambient operating temperature	-40 °C +60 °C
Ambient temperature, storage	-40 °C +75 °C
UL File No.	NRKH.E189383 & NRKH7.E189383

<sup>1)</sup> Limit values.

### Safety-related parameters

MTTF <sub>D</sub>	1,525 years
DC <sub>avg</sub>	0 %

### Certificates

EU declaration of conformity	J.
China RoHS	1

### Classifications

ECLASS 5.0	27270904
ECLASS 5.1.4	27270904
ECLASS 6.0	27270904
ECLASS 6.2	27270904
ECLASS 7.0	27270904
ECLASS 8.0	27270904
ECLASS 8.1	27270904
ECLASS 9.0	27270904
ECLASS 10.0	27270904
ECLASS 11.0	27270904
ECLASS 12.0	27270903

 $<sup>^{2)}\,\</sup>mbox{May}$  not fall below or exceed  $\mbox{U}_{\mbox{\scriptsize V}}$  tolerances.

 $<sup>^{</sup>m 3)}$  Without load and valve deenergized.

<sup>&</sup>lt;sup>4)</sup> Do not bend below 0 °C.

 $<sup>^{5)}</sup>$  A = V<sub>S</sub> connections reverse-polarity protected.


 $<sup>^{6)}</sup>$  C = interference suppression.

<sup>&</sup>lt;sup>7)</sup> D = outputs overcurrent and short-circuit protected.


### PHOTOELECTRIC SENSORS

ETIM 5.0	EC002719
ETIM 6.0	EC002719
ETIM 7.0	EC002719
ETIM 8.0	EC002719
UNSPSC 16.0901	39121528

### Connection diagram Cd-253




### Characteristic curve




### Light spot size








Distance in mm (inch)

### Dimensional drawing R cable



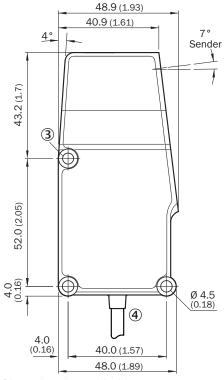

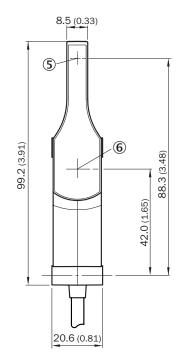



Dimensions in mm (inch)

- ① LED
- ② Potentiometer
- 3 fixing hole
- 4 cable
- ⑤ Center of optical axis, sender

6 Center of optical axis, receiver

### Recommended accessories

Other models and accessories → www.sick.com/ZoneControl

	Brief description	Туре	part no.	
Mounting syst	Mounting systems			
	Description: Mounting bracket     Material: Steel     Details: Steel, zinc coated     Items supplied: Mounting hardware included	BEF-WN-RT/IRT	2074621	
u u	Description: Mounting bracket     Material: Steel     Details: Steel, zinc coated     Items supplied: Mounting hardware included     Usable for: WTR/WLR, IRT	BEF-WK-WTR	2051786	
	<ul> <li>Description: Plate N11N for universal clamp bracket</li> <li>Material: Stainless steel</li> <li>Details: Stainless steel 1.4571 (sheet), Stainless steel 1.4408 (clamp)</li> <li>Items supplied: Universal clamp (5322627), mounting hardware</li> <li>Usable for: DeltaPac, Glare, WTD20E</li> </ul>	BEF-KHS-N11N	2071081	
connectors ar	connectors and cables			
	Connection type head A: Female connector, M12, 4-pin, straight, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 5 m, 4-wire, PVC Description: Sensor/actuator cable, unshielded Application: Zones with chemicals, Uncontaminated zones	YF2A14-050VB3XLEAX	2096235	
	<ul> <li>Connection type head A: Male connector, M12, 4-pin, straight, A-coded</li> <li>Description: Unshielded</li> <li>Connection systems: Screw-type terminals</li> <li>Permitted cross-section: ≤ 0.75 mm²</li> </ul>	STE-1204-G	6009932	
1	<ul> <li>Connection type head A: Female connector, M12, 4-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 5 m, 4-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>	YF2A14-050UB3XLEAX	2095608	

### SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

## **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

