

## DFS60E-BDEC00S20

DFS60

**INCREMENTAL ENCODERS** 



Illustration may differ

#### Ordering information

Туре	part no.
DFS60E-BDEC00S20	1084870

Other models and accessories → www.sick.com/DFS60



#### Detailed technical data

#### **Features**

Special device	<b>√</b>
Specialty	Customized Encoderflange Without standard stator coupling Customized stator coupling (spring wire), M3 screw and washer included in delivery (loose) Customer specific clamping ring (hexagon socket screw)
Standard reference device	DFS60E-BDEC00500, 1054332
Additional information	Ordering information for sales set DFS60E-BDEC sales set S20 (part number 1089692) consisting of the encoder 1084870 DFS60E-BDEC00S20 + connecting cable M23 socket, 10 m cable with flying leads $(6032868)$

#### Safety-related parameters

MTTF <sub>D</sub> (mean time to dangerous failure) 300 years (EN ISO 13849-1) 1)	
--	--

<sup>1)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40°C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

#### Performance

Pulses per revolution	500 <sup>1)</sup>
Measuring step	90°, electric/pulses per revolution
Measuring step deviation at non binary number of lines	± 0.2°
Error limits	± 0.3°

 $<sup>^{1)}</sup>$  See maximum revolution range.

#### Interfaces

Communication interface	Incremental
Communication Interface detail	HTL / Push pull
Number of signal channels	6-channel
Initialization time	40 ms
Output frequency	≤ 300 kHz
Load current	≤ 30 mA
Power consumption	≤ 0.5 W (without load)

#### **Electronics**

Connection type	Male connector, M12, 8-pin, radial		
Supply voltage	10 32 V		
Reference signal, number	1		
Reference signal, position	90°, electric, logically gated with A and B		
Reverse polarity protection	✓		
Short-circuit protection of the outputs	<b>✓</b> <sup>1)</sup>		

 $<sup>^{1)}</sup>$  Short-circuit opposite to another channel, US or GND permissable for maximum 30 s.

#### Mechanics

Mechanical design	Blind hollow shaft
Shaft diameter	10 mm Front clamp
Weight	+ 0.2 kg
Shaft material	Stainless steel
Flange material	Aluminum
Housing material	Aluminum die cast
Start up torque	0.8 Ncm (+20 °C)
Operating torque	0.6 Ncm (+20 °C)
Permissible movement static	± 0.3 mm (radial) ± 0.5 mm (axial)
Permissible movement dynamic	± 0.1 mm (radial) ± 0.2 mm (axial)
Operating speed	≤ 6,000 min <sup>-1 1)</sup>
Moment of inertia of the rotor	40 gcm <sup>2</sup>
Bearing lifetime	3.6 x 10^10 revolutions
Angular acceleration	≤ 500,000 rad/s²

 $<sup>^{1)}</sup>$  Allow for self-heating of 3.3 K per 1,000 rpm when designing the operating temperature range.

#### Ambient data

EMC	According to EN 61000-6-2 and EN 61000-6-4		
Enclosure rating	IP67, Housing side, male connector (IEC 60529) <sup>1)</sup> IP65, shaft side (IEC 60529)		
Permissible relative humidity	90 % (Condensation not permitted)		
Operating temperature range	0 °C +85 °C		
Storage temperature range	-40 °C +100 °C, without package		
Resistance to shocks	50 g, 6 ms (EN 60068-2-27)		
Resistance to vibration	20 g, 10 Hz 2,000 Hz (EN 60068-2-6)		

<sup>&</sup>lt;sup>1)</sup> With mating connector fitted.

#### Certificates

EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓


# DFS60E-BDEC00S20 | DFS60 INCREMENTAL ENCODERS

Moroccan declaration of conformity	✓
China RoHS	✓
cULus certificate	✓
Information according to Art. 3 of Data Act (Regulation EU 2023/2854)	✓

#### Classifications

ECLASS 5.0	27270501
ECLASS 5.1.4	27270501
ECLASS 6.0	27270590
ECLASS 6.2	27270590
ECLASS 7.0	27270501
ECLASS 8.0	27270501
ECLASS 8.1	27270501
ECLASS 9.0	27270501
ECLASS 10.0	27270501
ECLASS 11.0	27270501
ECLASS 12.0	27270501
ETIM 5.0	EC001486
ETIM 6.0	EC001486
ETIM 7.0	EC001486
ETIM 8.0	EC001486
UNSPSC 16.0901	41112113


#### **Dimensional drawing**

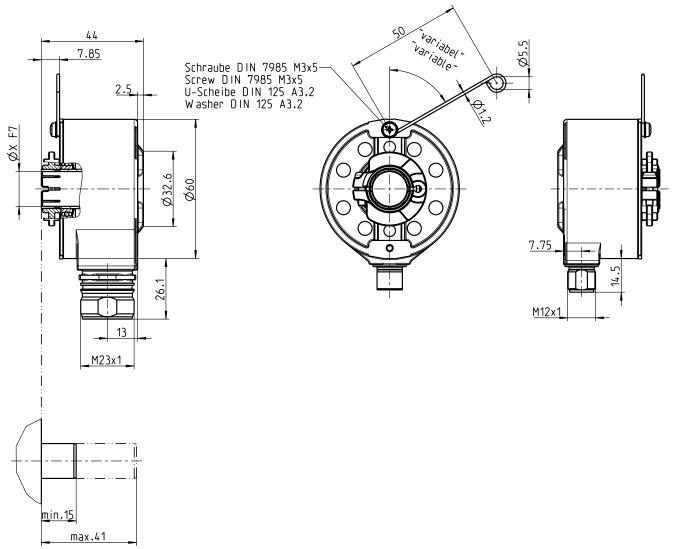

Dimensions in mm (inch)

- ① encoder with customized spring wire (delivery status: loose in scope of delivery)
- ② assembly note: all screw connections must be secured against loosening with liquid screw adhesive (LOCTITE 243, for example).

#### PIN assignment




view of M12 male device connector on encoder

PINMale connector M12, 8-pin	PINMale connector M23, 12-pin	Wire colors (ca- ble connection)	TTL/HTL signal	Sin/Cos 1.0 V <sub>PP</sub>	Explanation
1	6	Brown	_A	COS-	Signal wire

PINMale connector M23, 12-pin	Wire colors (ca- ble connection)	TTL/HTL signal	Sin/Cos 1.0 V <sub>PP</sub>	Explanation
5	White	А	COS+	Signal wire
1	Black	_B	SIN-	Signal wire
8	Pink	В	SIN+	Signal wire
4	Yellow	-Z	_Z	Signal wire
3	Purple	Z	Z	Signal wire
10	Blue	GND	GND	Ground connection
12	Red	+U <sub>S</sub>	+U <sub>S</sub>	Supply voltage
9	-	N.c.	N.c.	Not assigned
2	-	N.c.	N.c.	Not assigned
11	-	N.c.	N.c.	Not assigned
7 1)	Orange	0-SET 1)	N.c.	Set zero pulse <sup>1)</sup>
Screen	Screen	Screen	Screen	Screen connect- ed to housing on encoder side. Con- nected to ground on control side.
	tor M23, 12-pin  5 1 8 4 3 10 12 9 2 11 7 1)	tor M23, 12-pin         ble connection)           5         White           1         Black           8         Pink           4         Yellow           3         Purple           10         Blue           12         Red           9         -           2         -           11         -           7         Orange	tor M23, 12-pin         ble connection)           5         White         A           1         Black         B           8         Pink         B           4         Yellow         Z           3         Purple         Z           10         Blue         GND           12         Red         +Us           9         -         N.c.           2         -         N.c.           11         -         N.c.           7         Orange         O-SET 1)	tor M23, 12-pin         ble connection)           5         White         A         COS+           1         Black         B         SIN-           8         Pink         B         SIN+           4         Yellow         Z         Z           3         Purple         Z         Z           10         Blue         GND         GND           12         Red         +Us         +Us           9         -         N.c.         N.c.           2         -         N.c.         N.c.           11         -         N.c.         N.c.           7         Orange         O-SET         1)         N.c.

<sup>&</sup>lt;sup>1)</sup>For electrical interfaces only: M, U, V, W with 0-SET function on PIN 7 on M23 plug. The 0-SET input is used to set the zero pulse to the current shaft position. If the 0-SET input is applied to US for longer than 250 ms after it has previously been open or applied to GND for at least 1,000 ms, the current shaft position is assigned zero pulse signal "Z".

#### maximum revolution range

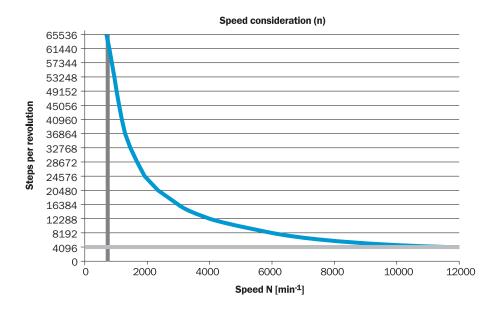

#### SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

### **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

