

# DFS60B-TGEZ00S91

DFS60

**INCREMENTAL ENCODERS** 



Illustration may differ

### Ordering information

| Туре             | part no. |
|------------------|----------|
| DFS60B-TGEZ00S91 | 1087485  |

Other models and accessories → www.sick.com/DFS60



#### Detailed technical data

#### **Features**

| Special device            | <b>√</b>   |
|---------------------------|--|
| Specialty                 | Stator coupling 2047428 BEF-DS01DFS/VFS premounted Cable, 8-wire, with plug, M23, 12-pin, universal, 0.5 m M23, 12-pin connector female included in delivery (6027538) |
| Standard reference device | DFS60B-TGEK00001   |

### Safety-related parameters

| MTTF <sub>D</sub> (mean time to dangerous failure) | 300 years (EN ISO 13849-1) 1) |
|--|-------------------------------|
|--|-------------------------------|

<sup>1)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40°C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

#### Performance

| Pulses per revolution                                  | 1 <sup>1)</sup>                     |
|--|-------------------------------------|
| Measuring step   | 90°, electric/pulses per revolution |
| Measuring step deviation at non binary number of lines | ± 0.08°                             |
| Error limits   | ± 0.05°                             |

 $<sup>^{1)}</sup>$  See maximum revolution range.

### Interfaces

| Communication interface        | Incremental            |
|--------------------------------|------------------------|
| Communication Interface detail | HTL / Push pull        |
| Number of signal channels      | 6-channel              |
| Initialization time            | 40 ms                  |
| Output frequency               | ≤ 600 kHz              |
| Load current                   | ≤ 30 mA                |
| Power consumption              | ≤ 0.5 W (without load) |

#### **Electronics**

| Connection type        | Special version   |
|------------------------|---|
| Connection type Detail | Cable, 8-wire, with plug, M23, 12-pin, universal, 0.5 m |

 $<sup>^{1)}\,\</sup>mbox{Short-circuit}$  opposite to another channel, US or GND permissable for maximum 30 s.

| Supply voltage                          | 10 32 V                                     |
|---|---|
| Reference signal, number                | 1   |
| Reference signal, position              | 90°, electric, logically gated with A and B |
| Reverse polarity protection             | ✓   |
| Short-circuit protection of the outputs | <b>✓</b> <sup>1)</sup>                      |

 $<sup>^{1)}\,\</sup>mbox{Short-circuit}$  opposite to another channel, US or GND permissable for maximum 30 s.

### Mechanics

| Mechanical design              | Through hollow shaft                  |
|--------------------------------|---------------------------------------|
| Shaft diameter                 | 14 mm<br>Front clamp                  |
| Weight                         | + 0.2 kg                              |
| Shaft material                 | Stainless steel                       |
| Flange material                | Aluminum                              |
| Housing material               | Aluminum die cast                     |
| Start up torque                | 0.8 Ncm (+20 °C)                      |
| Operating torque               | 0.6 Ncm (+20 °C)                      |
| Permissible movement static    | ± 0.3 mm (radial)<br>± 0.5 mm (axial) |
| Permissible movement dynamic   | ± 0.1 mm (radial)<br>± 0.2 mm (axial) |
| Operating speed                | ≤ 6,000 min <sup>-1 1)</sup>          |
| Moment of inertia of the rotor | 40 gcm <sup>2</sup>                   |
| Bearing lifetime               | 3.6 x 10^10 revolutions               |
| Angular acceleration           | ≤ 500,000 rad/s²                      |

 $<sup>^{1)}\,\</sup>mathrm{Allow}$  for self-heating of 3.3 K per 1,000 rpm when designing the operating temperature range.

#### Ambient data

| ЕМС                           | According to EN 61000-6-2 and EN 61000-6-4  |
|-------------------------------|---|
| Enclosure rating              | IP65, Housing side, male connector (IEC 60529) <sup>1)</sup> IP65, shaft side (IEC 60529) |
| Permissible relative humidity | 90 % (Condensation not permitted)   |
| Operating temperature range   | -40 °C +100 °C <sup>2)</sup><br>-30 °C +100 °C <sup>3)</sup>                              |
| Storage temperature range     | -40 °C +100 °C, without package   |
| Resistance to shocks          | 70 g, 6 ms (EN 60068-2-27)  |
| Resistance to vibration       | 30 g, 10 Hz 2,000 Hz (EN 60068-2-6)   |

<sup>1)</sup> With mating connector fitted.

### Certificates

| EU declaration of conformity   | ✓ |
|--------------------------------|---|
| UK declaration of conformity   | ✓ |
| ACMA declaration of conformity | ✓ |

<sup>2)</sup> Stationary position of the cable.

<sup>3)</sup> Flexible position of the cable.

## **DFS60B-TGEZ00S91 | DFS60**


### INCREMENTAL ENCODERS


| Moroccan declaration of conformity                                    | ✓        |
|---|----------|
| China RoHS  | <b>√</b> |
| cULus certificate   | ✓        |
| Information according to Art. 3 of Data Act (Regulation EU 2023/2854) | ✓        |

### Classifications

| ECLASS 5.0     | 27270501 |
|----------------|----------|
| ECLASS 5.1.4   | 27270501 |
| ECLASS 6.0     | 27270590 |
| ECLASS 6.2     | 27270590 |
| ECLASS 7.0     | 27270501 |
| ECLASS 8.0     | 27270501 |
| ECLASS 8.1     | 27270501 |
| ECLASS 9.0     | 27270501 |
| ECLASS 10.0    | 27270501 |
| ECLASS 11.0    | 27270501 |
| ECLASS 12.0    | 27270501 |
| ETIM 5.0       | EC001486 |
| ETIM 6.0       | EC001486 |
| ETIM 7.0       | EC001486 |
| ETIM 8.0       | EC001486 |
| UNSPSC 16.0901 | 41112113 |
|                |          |

### Dimensional drawing

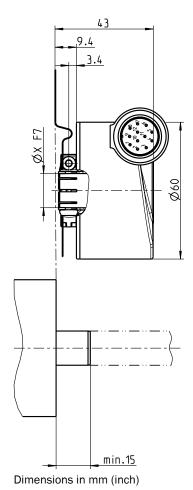

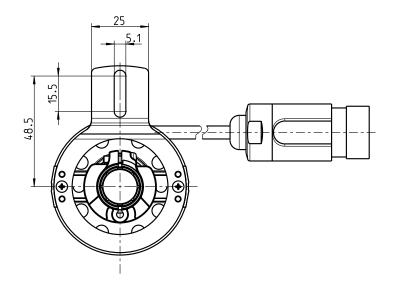

### PIN assignment




view of M23 male device connector on encoder

| PINMale connector M12, 8-pin | PINMale connector M23, 12-pin | Wire colors (ca-<br>ble connection) | TTL/HTL signal  | Sin/Cos 1.0 V <sub>PP</sub> | Explanation       |
|------------------------------|-------------------------------|-------------------------------------|-----------------|-----------------------------|-------------------|
| 1                            | 6                             | Brown                               | _A              | COS-                        | Signal wire       |
| 2                            | 5                             | White                               | Α               | COS+                        | Signal wire       |
| 3                            | 1                             | Black                               | _B              | SIN-                        | Signal wire       |
| 4                            | 8                             | Pink                                | В               | SIN+                        | Signal wire       |
| 5                            | 4                             | Yellow                              | _Z              | -z                          | Signal wire       |
| 6                            | 3                             | Purple                              | Z               | Z                           | Signal wire       |
| 7                            | 10                            | Blue                                | GND             | GND                         | Ground connection |
| 8                            | 12                            | Red                                 | +U <sub>S</sub> | +U <sub>S</sub>             | Supply voltage    |

| PINMale connector M12, 8-pin | PINMale connector M23, 12-pin | Wire colors (ca-<br>ble connection) | TTL/HTL signal | Sin/Cos 1.0 V <sub>PP</sub> | Explanation   |
|------------------------------|-------------------------------|-------------------------------------|----------------|-----------------------------|---|
| -                            | 9                             | -                                   | N.c.           | N.c.                        | Not assigned  |
| -                            | 2                             | -                                   | N.c.           | N.c.                        | Not assigned  |
| -                            | 11                            | -                                   | N.c.           | N.c.                        | Not assigned  |
| -                            | 7 1)                          | Orange                              | 0-SET 1)       | N.c.                        | Set zero pulse <sup>1)</sup>  |
| Screen                       | Screen                        | Screen                              | Screen         | Screen                      | Screen connect-<br>ed to housing on<br>encoder side. Con-<br>nected to ground<br>on control side. |

<sup>&</sup>lt;sup>1)</sup>For electrical interfaces only: M, U, V, W with 0-SET function on PIN 7 on M23 plug. The 0-SET input is used to set the zero pulse to the current shaft position. If the 0-SET input is applied to US for longer than 250 ms after it has previously been open or applied to GND for at least 1,000 ms, the current shaft position is assigned zero pulse signal "Z".

### maximum revolution range

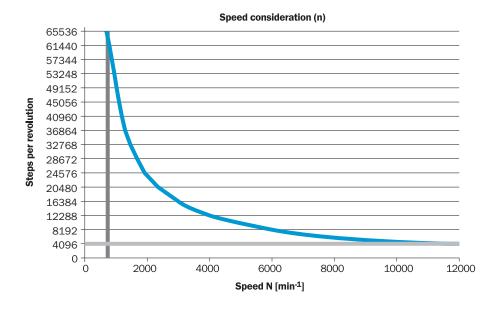

### Recommended accessories

Other models and accessories → www.sick.com/DFS60

|                       | Brief description  | Туре             | part no. |  |  |
|-----------------------|--|------------------|----------|--|--|
| connectors and cables |  |                  |          |  |  |
| R                     | <ul> <li>Connection type head A: Female connector, JST, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: SSI, Incremental</li> <li>Items supplied: JST including sealing</li> <li>Cable: 1.5 m, 8-wire, PUR, halogen-free</li> <li>Description: SSI, shielded, Incremental</li> </ul> | DOL-0J08-G1M5AA6 | 2048590  |  |  |
| The second            | <ul> <li>Connection type head A: Female connector, JST, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: SSI, Incremental</li> <li>Items supplied: JST including sealing</li> <li>Cable: 3 m, 8-wire, PUR, halogen-free</li> <li>Description: SSI, shielded, Incremental</li> </ul>   | DOL-0J08-G3M0AA6 | 2048591  |  |  |
| The second second     | <ul> <li>Connection type head A: Female connector, JST, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Incremental, SSI</li> <li>Items supplied: JST including sealing</li> <li>Cable: 0.5 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded, SSI</li> </ul> | DOL-0J08-G0M5AA3 | 2046873  |  |  |
| · ·                   | <ul> <li>Connection type head A: Female connector, JST, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Incremental, SSI</li> <li>Items supplied: JST including sealing</li> <li>Cable: 5 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded, SSI</li> </ul>   | DOL-0J08-G05MAA3 | 2046876  |  |  |
| · ·                   | <ul> <li>Connection type head A: Female connector, JST, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Incremental, SSI</li> <li>Items supplied: JST including sealing</li> <li>Cable: 10 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded, SSI</li> </ul>  | DOL-0J08-G10MAA3 | 2046877  |  |  |
|                       | <ul> <li>Connection type head A: Female connector, JST, 8-pin, straight</li> <li>Connection type head B: Male connector, M23, 12-pin, straight</li> <li>Signal type: Incremental</li> <li>Cable: 0.35 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded</li> </ul>                                | STL-2312-GM35AA3 | 2061621  |  |  |
|                       | <ul> <li>Connection type head A: Female connector, JST, 8-pin, straight</li> <li>Connection type head B: Male connector, M23, 12-pin, straight</li> <li>Signal type: Incremental</li> <li>Cable: 1 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded</li> </ul>                                   | STL-2312-G01MAA3 | 2061622  |  |  |
|                       | Connection type head A: Male connector, M12, 8-pin, straight, A-coded Signal type: Incremental Cable: CAT5, CAT5e Description: Incremental, shielded Connection systems: IDC quick connection Permitted cross-section: 0.14 mm² 0.34 mm²   | STE-1208-GA01    | 6044892  |  |  |
|                       | Connection type head A: Male connector, M23, 12-pin, straight, A-coded Signal type: HIPERFACE®, SSI, Incremental Description: HIPERFACE®, shieldedSSIIncremental Connection systems: Solder connection   | STE-2312-GX      | 6028548  |  |  |
|                       | Connection type head A: Male connector, M23, 12-pin, straight, A-coded Signal type: HIPERFACE <sup>®</sup> , SSI, Incremental Description: HIPERFACE <sup>®</sup> , shieldedSSIIncremental Connection systems: Solder connection   | STE-2312-G01     | 2077273  |  |  |
|                       | <ul> <li>Connection type head A: Female connector, JST, 8-pin, straight</li> <li>Connection type head B: Male connector, M23, 12-pin, straight</li> <li>Signal type: Incremental</li> <li>Cable: 2 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded</li> </ul>                                   | STL-2312-G02MAA3 | 2061504  |  |  |

# **DFS60B-TGEZ00S91 | DFS60**

### INCREMENTAL ENCODERS

|               | Brief description  | Туре        | part no. |  |  |
|---------------|--|-------------|----------|--|--|
| Mounting syst | Mounting systems   |             |          |  |  |
|               | Product family: Stator couplings     Description: Standard stator coupling   | BEF-DS00XFX | 2056812  |  |  |
|               | <ul> <li>Description: Clamping ring for metal hollow shaft</li> <li>Material: Steel</li> <li>Details: Metal</li> </ul> | BEF-KR-M    | 2064709  |  |  |

### SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

### **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

