

# DBS60E-BHAP02500

DBS60

**INCREMENTAL ENCODERS** 





### Ordering information

Туре	part no.
DBS60E-BHAP02500	1091006

Other models and accessories → www.sick.com/DBS60

Illustration may differ



### Detailed technical data

### Safety-related parameters

MTTF <sub>D</sub> (mean time to dangerous failure)	500 years (EN ISO 13849-1) 1)
--	-------------------------------

<sup>1)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40 °C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

#### Performance

Pulses per revolution	2,500
Measuring step	≤ 90°, electric/pulses per revolution
Measuring step deviation	± 18° / pulses per revolution
Error limits	Measuring step deviation x 3
Duty cycle	≤ 0.5 ± 5 %

### Interfaces

Communication interface	Incremental
Communication Interface detail	TTL / RS-422
Number of signal channels	6-channel
Initialization time	< 5 ms <sup>1)</sup>
Output frequency	+ 300 kHz <sup>2)</sup>
Load current	≤ 30 mA, per channel
Operating current	≤ 50 mA (without load)

<sup>1)</sup> Valid signals can be read once this time has elapsed.

#### **Electronics**

Connection type	Cable, 8-wire, with male connector, M12, 8-pin, universal, 0.5 m $^{1)}$	
Supply voltage	4.5 5.5 V	
Reference signal, number	1	
Reference signal, position	90°, electric, logically gated with A and B	

<sup>1)</sup> The universal cable connection is positioned so that it is possible to lay it without bends in a radial or axial direction.

 $<sup>^{2)}\,\</sup>mathrm{Up}$  to 450 kHz on request.

 $<sup>^{2)}</sup>$  Short-circuit opposite to another channel or GND permissible for max. 60 s. No protection signal against U<sub>S</sub>.

Reverse polarity protection	<b>✓</b>
Short-circuit protection of the outputs	<b>✓</b> <sup>2)</sup>

 $<sup>^{1)}</sup>$  The universal cable connection is positioned so that it is possible to lay it without bends in a radial or axial direction.

### Mechanics

Mechanical design	Blind hollow shaft	
Shaft diameter	15 mmFront clamp	
Flange type / stator coupling	2-sided stator coupling, slot, screw hole circle 63–83 mm	
Weight	+ 0.25 kg <sup>1)</sup>	
Shaft material	Stainless steel	
Flange material	Aluminum	
Housing material	Aluminum	
Material, cable	PVC	
Start up torque	+ 0.5 Ncm (+20 °C)	
Operating torque	0.4 Ncm (+20 °C)	
Permissible movement static	$\pm$ 0.3 mm (radial) $\pm$ 0.5 mm (axial) $^{2)}$	
Permissible movement dynamic	$\pm$ 0.1 mm (radial) $\pm$ 0.2 mm (axial) <sup>2)</sup>	
Operating speed	6,000 min <sup>-1 3)</sup>	
Maximum operating speed	9,000 min <sup>-1 4)</sup>	
Moment of inertia of the rotor	50 gcm <sup>2</sup>	
Bearing lifetime	3.6 x 10 <sup>9</sup> revolutions	
Angular acceleration	≤ 500,000 rad/s²	

 $<sup>^{1)}\,\</sup>mathrm{Based}$  on encoder with male connector or cable with male connector.

#### Ambient data

EMC	According to EN 61000-6-2 and EN 61000-6-3
Enclosure rating	IP67, housing side (IEC 60529) <sup>1)</sup> IP65, shaft side (IEC 60529)
Permissible relative humidity	90 % (Condensation not permitted)
Operating temperature range	-20 °C +85 °C <sup>2)</sup>
Storage temperature range	-40 °C +100 °C, without package
Resistance to shocks	250 g, 3 ms (EN 60068-2-27)
Resistance to vibration	30 g, 10 Hz 2,000 Hz (EN 60068-2-6)

 $<sup>^{1)}</sup>$  With mating connector fitted.

### Certificates

EU declaration of conformity	✓
------------------------------	---

 $<sup>^{2)}</sup>$  Short-circuit opposite to another channel or GND permissible for max. 60 s. No protection signal against U<sub>S</sub>.

 $<sup>^{2)}\,\</sup>mathrm{Not}$  apllicable for stator coupling type C and K.

 $<sup>^{3)}</sup>$  Allow for self-heating of 2.6 K per 1,000 rpm when designing the operating temperature range.

<sup>&</sup>lt;sup>4)</sup> Maximum speed which does not cause mechanical damage to the encoder. Impact on the service life and signal quality is possible. Please note the maximum output frequency.

<sup>&</sup>lt;sup>2)</sup> These values relate to all mechanical versions including recommended accessories unless otherwise noted.

### **DBS60E-BHAP02500 | DBS60**


### **INCREMENTAL ENCODERS**


UK declaration of conformity	✓
ACMA declaration of conformity	✓
China-RoHS	✓
cRUus certificate	✓
Information according to Art. 3 of Data Act (Regulation EU 2023/2854)	✓


### Classifications

ASS 5.0	27270501
ASS 5.1.4	27270501
ASS 6.0	27270590
ASS 6.2	27270590
ASS 7.0	27270501
ASS 8.0	27270501
ASS 8.1	27270501
ASS 9.0	27270501
ASS 10.0	27270501
ASS 11.0	27270501
ASS 12.0	27270501
/I 5.0	EC001486
/I 6.0	EC001486
/I 7.0	EC001486
/I 8.0	EC001486
PSC 16.0901	41112113

### **Dimensional drawing**





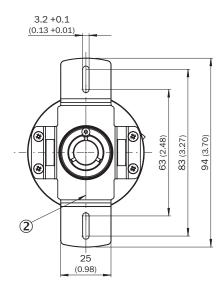

Dimensions in mm (inch)


XF7 values see shaft diameter table for blind hollow shaft

① Zero pulse mark on housing

② zero pulse mark on flange under stator coupling

TypeBlind hollow shaft	Shaft diameter XF7
DBS60x-BAxxxxxxxxDBS60x-B1xxxxxxxxx	6 mm
DBS60x-BBxxxxxxxxDBS60x-B2xxxxxxxxx	8 mm
DBS60x-BCxxxxxxxxDBS60x-B3xxxxxxxxx	3/8″
DBS60x-BDxxxxxxxxDBS60x-B4xxxxxxxx	10 mm
DBS60x-BExxxxxxxxDBS60x-B5xxxxxxxxx	12 mm
DBS60x-BFxxxxxxxxDBS60x-B6xxxxxxxxx	1/2"
DBS60x-BGxxxxxxxxDBS60x-B7xxxxxxxxx	14 mm
DBS60x-BHxxxxxxxxDBS60x-B8xxxxxxxxx	15 mm
DBS60x-BJxxxxxxxxx	5/8″
	-


### Attachment specifications Blind hollow shaft



customer side

TypeBlind hollow shaft	Shaft diameter xj7
DBS60x-BAxxxxxxxxDBS60x-B1xxxxxxxx	6 mm
DBS60x-BBxxxxxxxxDBS60x-B2xxxxxxxxx	8 mm
DBS60x-BCxxxxxxxxDBS60x-B3xxxxxxxxx	3/8"
DBS60x-BDxxxxxxxxDBS60x-B4xxxxxxxxx	10 mm
DBS60x-BExxxxxxxxDBS60x-B5xxxxxxxxx	12 mm
DBS60x-BFxxxxxxxxDBS60x-B6xxxxxxxxx	1/2"
DBS60x-BGxxxxxxxxDBS60x-B7xxxxxxxxx	14 mm
DBS60x-BHxxxxxxxxxDBS60x-B8xxxxxxxxx	15 mm
DBS60x-BJxxxxxxxxx	5/8"
	-

### PIN assignment



view of M12 male device connector on cable / housing


# DBS60E-BHAP02500 | DBS60

**INCREMENTAL ENCODERS** 


Wire colors (ca- ble connection)	Male connector M12, 8-pin	Male connector M23, 12-pin	TTL/HTL 6- channel signal	Explanation
Brown	1	6	A-	Signal wire
White	2	5	Α	Signal wire
Black	3	1	B-	Signal wire
Pink	4	8	В	Signal wire
Yellow	5	4	Z-	Signal wire
Purple	6	3	Z	Signal wire
Blue	7	10	GND	Ground connection
Red	8	12	+U <sub>s</sub>	Supply voltage
-	-	9	Not assigned	Not assigned
-	-	2	Not assigned	Not assigned
-	-	11	Not assigned	Not assigned
-	-	7	Not assigned	Not assigned
Screen	Screen	Screen	Screen	Screen connected to encoder housing

### Diagrams

### Pulses per revolution

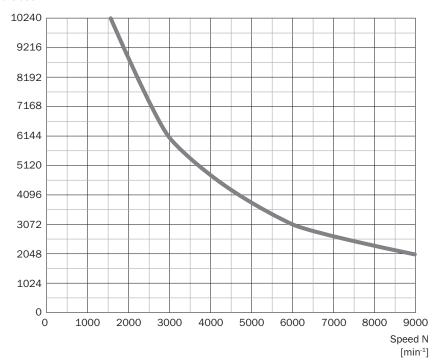

### Diagrams Signal outputs for electrical interfaces TTL and HTL

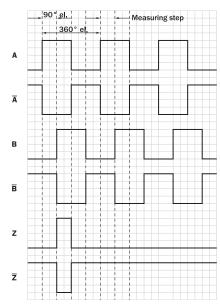

Cw with view on the encoder shaft in direction "A", compare dimensional drawing.

Supply voltage	Output
4,5 V 5,5 V	πL
10 V 30 V	πL
10 V 27 V	HTL
4,5 V 30 V	TTL/HTL universal
4,5 V 30 V	ΠL

### Recommended accessories

Other models and accessories → www.sick.com/DBS60

	Brief description	Туре	part no.
connectors ar	nd cables		
	Connection type head A: Flying leads Connection type head B: Flying leads Signal type: SSI, Incremental, HIPERFACE® Items supplied: By the meter Cable: 8-wire, PUR, halogen-free Description: SSI, shielded, Incremental, HIPERFACE®	LTG-2308-MWENC	6027529
<u></u>	<ul> <li>Connection type head A: Flying leads</li> <li>Connection type head B: Flying leads</li> <li>Signal type: SSI, Incremental</li> <li>Items supplied: By the meter</li> <li>Cable: 11-wire, PUR</li> <li>Description: SSI, shielded, Incremental</li> </ul>	LTG-2411-MW	6027530
<u></u>	<ul> <li>Connection type head A: Flying leads</li> <li>Connection type head B: Flying leads</li> <li>Signal type: SSI, Incremental</li> <li>Items supplied: By the meter</li> <li>Cable: 12-wire, PUR, halogen-free</li> <li>Description: SSI, shielded, Incremental</li> </ul>	LTG-2512-MW	6027531
<u></u>	<ul> <li>Connection type head A: Flying leads</li> <li>Connection type head B: Flying leads</li> <li>Signal type: SSI, TTL, HTL, Incremental</li> <li>Items supplied: By the meter</li> <li>Cable: 12-wire, UV and saltwater-resistant, PUR, halogen-free</li> <li>Description: SSI, shielded, TTL, HTL, Incremental</li> </ul>	LTG-2612-MW	6028516
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Incremental, SSI</li> <li>Cable: 2 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded, SSI</li> <li>Connection systems: Flying leads</li> </ul>	DOL-1208-G02MAC1	6032866
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Incremental, SSI</li> <li>Cable: 5 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded, SSI</li> <li>Connection systems: Flying leads</li> </ul>	DOL-1208-G05MAC1	6032867
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Incremental, SSI</li> <li>Cable: 10 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded, SSI</li> <li>Connection systems: Flying leads</li> </ul>	DOL-1208-G10MAC1	6032868
~	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Incremental, SSI</li> <li>Cable: 20 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded, SSI</li> <li>Connection systems: Flying leads</li> </ul>	DOL-1208-G20MAC1	6032869
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Incremental, SSI</li> <li>Cable: 25 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded, SSI</li> <li>Connection systems: Flying leads</li> </ul>	DOL-1208-G25MAC1	6067859
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight, A-coded</li> <li>Signal type: Incremental, SSI</li> <li>Cable: CAT5, CAT5e</li> <li>Description: Incremental, shieldedSSI</li> <li>Connection systems: IDC quick connection</li> <li>Permitted cross-section: 0.14 mm² 0.34 mm²</li> </ul>	DOS-1208-GA01	6045001
1	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight, A-coded</li> <li>Connection type head B: Male connector, M12, 8-pin, straight, A-coded</li> <li>Cable: 20 m, 8-wire, PUR, halogen-free</li> <li>Description: Shielded</li> </ul>	YF2AA8-200S01M- KA18	2099208

# DBS60E-BHAP02500 | DBS60

INCREMENTAL ENCODERS

	Brief description	Туре	part no.
	Permitted cross-section: ≤ 0.25 mm²     Note: Drag chain use     Application: Drag chain operation		
130	Connection type head A: Female connector, M12, 8-pin, straight, A-coded Connection type head B: Male connector, M12, 8-pin, straight, A-coded Cable: 2 m, 8-wire, PUR, halogen-free Description: Shielded Permitted cross-section: ≤ 0.25 mm² Note: Drag chain use Application: Drag chain operation	YF2AA8-020S01M- KA18	2099207
130	Connection type head A: Female connector, M12, 8-pin, straight, A-coded Connection type head B: Male connector, M12, 8-pin, straight, A-coded Cable: 5 m, 8-wire, PUR, halogen-free Description: Shielded Permitted cross-section: ≤ 0.25 mm² Note: Drag chain use Application: Drag chain operation	YF2AA8-050S01M- KA18	2099209
130	Connection type head A: Female connector, M12, 8-pin, straight, A-coded Connection type head B: Male connector, M12, 8-pin, straight, A-coded Cable: 10 m, 8-wire, PUR, halogen-free Description: Shielded Permitted cross-section: ≤ 0.25 mm² Note: Drag chain use Application: Drag chain operation	YF2AA8-100S01M- KA18	2099210

### SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

# **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

