

# DBS60E-B8ECD1024

DBS60

**INCREMENTAL ENCODERS** 





## Ordering information

Туре	part no.
DBS60E-B8ECD1024	1093670

Other models and accessories → www.sick.com/DBS60

Illustration may differ



#### Detailed technical data

## Safety-related parameters

MTTF <sub>D</sub> (mean time to dangerous failure)	500 years (EN ISO 13849-1) <sup>1)</sup>
MTTF <sub>D</sub> (mean time to dangerous failure)	500 years (EN ISO 13849-1) <sup>1)</sup>

<sup>1)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40 °C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

#### Performance

Pulses per revolution	1,024
Measuring step	≤ 90°, electric/pulses per revolution
Measuring step deviation	± 18° / pulses per revolution
Error limits	Measuring step deviation x 3
Duty cycle	≤ 0.5 ± 5 %

#### Interfaces

Communication interface	Incremental
Communication Interface detail	HTL / Push pull
Number of signal channels	6-channel
Initialization time	< 5 ms <sup>1)</sup>
Output frequency	+ 300 kHz <sup>2)</sup>
Load current	≤ 30 mA, per channel
Power consumption	≤ 1 W (without load)

 $<sup>^{1)}</sup>$  Valid signals can be read once this time has elapsed.

#### **Electronics**

Connection type	Male connector, M12, 8-pin, radial

 $<sup>^{1)}</sup>$  Short-circuit opposite to another channel, US or GND permissable for maximum 30 s.

 $<sup>^{2)}\,\</sup>mbox{Up}$  to 450 kHz on request.

Supply voltage	10 27 V
Reference signal, number	1
Reference signal, position	90°, electric, logically gated with A and B
Reverse polarity protection	✓
Short-circuit protection of the outputs	<b>✓</b> ¹)

 $<sup>^{1)}</sup>$  Short-circuit opposite to another channel, US or GND permissable for maximum 30 s.

#### Mechanics

Mechanical design	Blind hollow shaft
Shaft diameter	15 mm Front clamp
Flange type / stator coupling	1-sided stator coupling, slot, screw hole circle radius 31.5-48.5 mm
Weight	+ 0.25 kg <sup>1)</sup>
Shaft material	Stainless steel with plastic shaft
Flange material	Aluminum
Housing material	Aluminum
Start up torque	+ 0.5 Ncm (+20 °C)
Operating torque	0.4 Ncm (+20 °C)
Permissible movement static	$\pm$ 0.3 mm (radial) $\pm$ 0.5 mm (axial) <sup>2)</sup>
Permissible movement dynamic	$\pm$ 0.1 mm (radial) $\pm$ 0.2 mm (axial) <sup>2)</sup>
Operating speed	6,000 min <sup>-1 3)</sup>
Maximum operating speed	9,000 min <sup>-1 4)</sup>
Moment of inertia of the rotor	50 gcm <sup>2</sup>
Bearing lifetime	3.6 x 10 <sup>9</sup> revolutions
Angular acceleration	≤ 200,000 rad/s²

 $<sup>^{1)}</sup>$  Based on encoder with male connector or cable with male connector.

#### Ambient data

EMC	According to EN 61000-6-2 and EN 61000-6-3
Enclosure rating	IP67, housing side (IEC 60529) <sup>1)</sup> IP65, shaft side (IEC 60529)
Permissible relative humidity	90 % (Condensation not permitted)
Operating temperature range	-20 °C +85 °C <sup>2)</sup>
Storage temperature range	-40 °C +100 °C, without package
Resistance to shocks	200 g, 3 ms (EN 60068-2-27)
Resistance to vibration	30 g, 10 Hz 2,000 Hz (EN 60068-2-6)

<sup>&</sup>lt;sup>1)</sup> With mating connector fitted.

 $<sup>^{2)}\,\</sup>mathrm{Not}$  apllicable for stator coupling type C and K.

 $<sup>^{</sup>m 3)}$  Allow for self-heating of 2.6 K per 1,000 rpm when designing the operating temperature range.

<sup>4)</sup> Maximum speed which does not cause mechanical damage to the encoder. Impact on the service life and signal quality is possible. Please note the maximum output frequency.

<sup>&</sup>lt;sup>2)</sup> These values relate to all mechanical versions including recommended accessories unless otherwise noted.

## DBS60E-B8ECD1024 | DBS60

**INCREMENTAL ENCODERS** 


## Certificates


EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
China RoHS	✓
cULus certificate	✓
Information according to Art. 3 of Data Act (Regulation EU 2023/2854)	<b>✓</b>

## Classifications

ECLASS 5.0	27270501
ECLASS 5.1.4	27270501
ECLASS 6.0	27270590
ECLASS 6.2	27270590
ECLASS 7.0	27270501
ECLASS 8.0	27270501
ECLASS 8.1	27270501
ECLASS 9.0	27270501
ECLASS 10.0	27270501
ECLASS 11.0	27270501
ECLASS 12.0	27270501
ETIM 5.0	EC001486
ETIM 6.0	EC001486
ETIM 7.0	EC001486
ETIM 8.0	EC001486
UNSPSC 16.0901	41112113

## **Dimensional drawing**

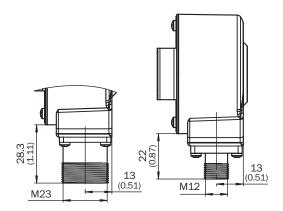

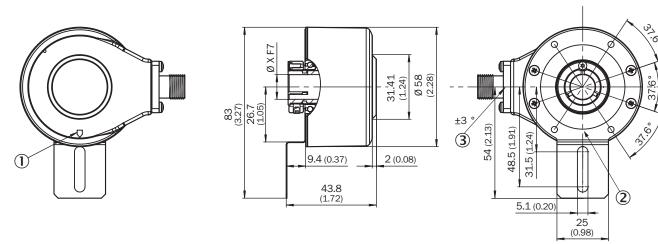

Dimensions in mm (inch)

XF7 values see shaft diameter table for blind hollow shaft

- ① Zero pulse mark on housing
- ② zero pulse mark on flange under stator coupling
- 3 male connector tolerance in relation to hole pattern

TypeBlind hollow shaft	Shaft diameter XF7
DBS60x-BAxxxxxxxx DBS60x-B1xxxxxxxxx	6 mm
DBS60x-BBxxxxxxxx DBS60x-B2xxxxxxxxx	8 mm
DBS60x-BCxxxxxxxx DBS60x-B3xxxxxxxxx	3/8″
DBS60x-BDxxxxxxxx DBS60x-B4xxxxxxxxx	10 mm
DBS60x-BExxxxxxxx DBS60x-B5xxxxxxxxx	12 mm
DBS60x-BFxxxxxxxx DBS60x-B6xxxxxxxxx	1/2"
DBS60x-BGxxxxxxxx DBS60x-B7xxxxxxxxx	14 mm
DBS60x-BHxxxxxxxxx DBS60x-B8xxxxxxxxx	15 mm
DBS60x-BJxxxxxxxxx	5/8″

TypeBlind hollow shaft	Shaft diameter XF7
-	-


## Attachment specifications Blind hollow shaft



#### customer side

TypeBlind hollow shaft	Shaft diameter xj7
DBS60x-BAxxxxxxxxx DBS60x-B1xxxxxxxxx	6 mm
DBS60x-BBxxxxxxxx DBS60x-B2xxxxxxxxx	8 mm
DBS60x-BCxxxxxxxx DBS60x-B3xxxxxxxxx	3/8"
DBS60x-BDxxxxxxxx DBS60x-B4xxxxxxxxx	10 mm
DBS60x-BExxxxxxxx DBS60x-B5xxxxxxxxx	12 mm
DBS60x-BFxxxxxxxx DBS60x-B6xxxxxxxxx	1/2"
DBS60x-BGxxxxxxxx DBS60x-B7xxxxxxxxx	14 mm
DBS60x-BHxxxxxxxxx DBS60x-B8xxxxxxxxx	15 mm
DBS60x-BJxxxxxxxxx	5/8″

## PIN assignment




view of M12 male device connector on cable / housing

	,	<u> </u>		
Wire colors (ca- ble connection)	Male connec- tor M12, 8-pin	Male connector M23, 12-pin	TTL/HTL 6- channel signal	Explanation
Brown	1	6	A-	Signal wire
White	2	5	Α	Signal wire
Black	3	1	B-	Signal wire


Wire colors (ca- ble connection)	Male connector M12, 8-pin	Male connector M23, 12-pin	TTL/HTL 6- channel signal	Explanation
Pink	4	8	В	Signal wire
Yellow	5	4	Z-	Signal wire
Purple	6	3	Z	Signal wire
Blue	7	10	GND	Ground connection
Red	8	12	+U <sub>s</sub>	Supply voltage
-	-	9	Not assigned	Not assigned
-	-	2	Not assigned	Not assigned
-	-	11	Not assigned	Not assigned
-	-	7	Not assigned	Not assigned
Screen	Screen	Screen	Screen	Screen connected to encoder housing

## Diagrams

#### Pulses per revolution

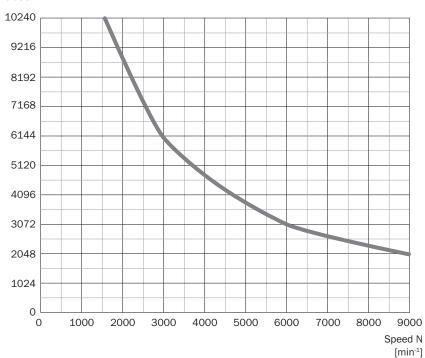

## Diagrams Signal outputs for electrical interfaces TTL and HTL

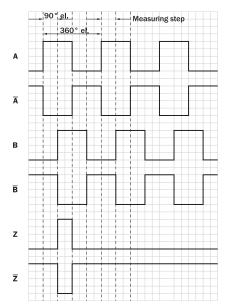

Cw with view on the encoder shaft in direction "A", compare dimensional drawing.

Supply voltage	Output
4,5 V 5,5 V	ΠL
10 V 30 V	πL
10 V 27 V	HTL
4,5 V 30 V	TTL/HTL universal
4,5 V 30 V	ΠL

#### Recommended accessories

Other models and accessories → www.sick.com/DBS60

	Brief description	Туре	part no.
onnectors a	nd cables		
	Connection type head A: Flying leads Connection type head B: Flying leads Signal type: SSI, Incremental, HIPERFACE Items supplied: By the meter Cable: 8-wire, PUR, halogen-free Description: SSI, shielded, Incremental, HIPERFACE  Description: SSI, shielded, Incremental, HIPERFACE	LTG-2308-MWENC	6027529
_	<ul> <li>Connection type head A: Flying leads</li> <li>Connection type head B: Flying leads</li> <li>Signal type: SSI, Incremental</li> <li>Items supplied: By the meter</li> <li>Cable: 11-wire, PUR</li> <li>Description: SSI, shielded, Incremental</li> </ul>	LTG-2411-MW	6027530
_	<ul> <li>Connection type head A: Flying leads</li> <li>Connection type head B: Flying leads</li> <li>Signal type: SSI, Incremental</li> <li>Items supplied: By the meter</li> <li>Cable: 12-wire, PUR, halogen-free</li> <li>Description: SSI, shielded, Incremental</li> </ul>	LTG-2512-MW	6027531
<u></u>	<ul> <li>Connection type head A: Flying leads</li> <li>Connection type head B: Flying leads</li> <li>Signal type: SSI, TTL, HTL, Incremental</li> <li>Items supplied: By the meter</li> <li>Cable: 12-wire, UV and saltwater-resistant, PUR, halogen-free</li> <li>Description: SSI, shielded, TTL, HTL, Incremental</li> </ul>	LTG-2612-MW	6028516
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Incremental, SSI</li> <li>Cable: 2 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded, SSI</li> <li>Connection systems: Flying leads</li> </ul>	DOL-1208-G02MAC1	6032866
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Incremental, SSI</li> <li>Cable: 5 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded, SSI</li> <li>Connection systems: Flying leads</li> </ul>	DOL-1208-G05MAC1	6032867
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Incremental, SSI</li> <li>Cable: 10 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded, SSI</li> <li>Connection systems: Flying leads</li> </ul>	DOL-1208-G10MAC1	6032868
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Incremental, SSI</li> <li>Cable: 20 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded, SSI</li> <li>Connection systems: Flying leads</li> </ul>	DOL-1208-G20MAC1	6032869
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Incremental, SSI</li> <li>Cable: 25 m, 8-wire, PUR, halogen-free</li> <li>Description: Incremental, shielded, SSI</li> <li>Connection systems: Flying leads</li> </ul>	DOL-1208-G25MAC1	6067859
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight, A-coded</li> <li>Signal type: Incremental, SSI</li> <li>Cable: CAT5, CAT5e</li> <li>Description: Incremental, shieldedSSI</li> <li>Connection systems: IDC quick connection</li> <li>Permitted cross-section: 0.14 mm² 0.34 mm²</li> </ul>	DOS-1208-GA01	6045001
1000	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight, A-coded</li> <li>Connection type head B: Male connector, M12, 8-pin, straight, A-coded</li> <li>Cable: 20 m, 8-wire, PUR, halogen-free</li> </ul>	YF2AA8-200S01M- KA18	2099208

	Brief description	Туре	part no.
	<ul> <li>Permitted cross-section: ≤ 0.25 mm²</li> <li>Note: Drag chain use</li> <li>Application: Drag chain operation</li> </ul>		
130	Connection type head A: Female connector, M12, 8-pin, straight, A-coded Connection type head B: Male connector, M12, 8-pin, straight, A-coded Cable: 2 m, 8-wire, PUR, halogen-free Description: Shielded Permitted cross-section: ≤ 0.25 mm² Note: Drag chain use Application: Drag chain operation	YF2AA8-020S01M- KA18	2099207
	Connection type head A: Female connector, M12, 8-pin, straight, A-coded Connection type head B: Male connector, M12, 8-pin, straight, A-coded Cable: 5 m, 8-wire, PUR, halogen-free Description: Shielded Permitted cross-section: ≤ 0.25 mm² Note: Drag chain use Application: Drag chain operation	YF2AA8-050S01M- KA18	2099209
130	Connection type head A: Female connector, M12, 8-pin, straight, A-coded Connection type head B: Male connector, M12, 8-pin, straight, A-coded Cable: 10 m, 8-wire, PUR, halogen-free Description: Shielded Permitted cross-section: ≤ 0.25 mm² Note: Drag chain use Application: Drag chain operation	YF2AA8-100S01M- KA18	2099210
	Connection type head A: Female connector, M12, 8-pin, angled Connection type head B: Flying leads Signal type: HIPERFACE <sup>®</sup> , Incremental Cable: 2 m, 8-wire, PUR, halogen-free Description: HIPERFACE <sup>®</sup> , shielded, Incremental	DOL-1208-W02MAC1	6037724
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, angled</li> <li>Connection type head B: Flying leads</li> <li>Signal type: HIPERFACE<sup>®</sup>, Incremental</li> <li>Cable: 5 m, 8-wire, PUR, halogen-free</li> <li>Description: HIPERFACE<sup>®</sup>, shielded, Incremental</li> </ul>	DOL-1208-W05MAC1	6037725
	Connection type head A: Female connector, M12, 8-pin, angled Connection type head B: Flying leads Signal type: HIPERFACE <sup>®</sup> , Incremental Cable: 10 m, 8-wire, PUR, halogen-free Description: HIPERFACE <sup>®</sup> , shielded, Incremental	DOL-1208-W10MAC1	6037726
	Connection type head A: Female connector, M12, 8-pin, angled Connection type head B: Flying leads Signal type: HIPERFACE <sup>®</sup> , Incremental Cable: 20 m, 8-wire, PUR Description: HIPERFACE <sup>®</sup> , shielded, Incremental	DOL-1208-W20MAC1	6037727
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, angled</li> <li>Connection type head B: Flying leads</li> <li>Cable: 2 m, 8-wire, PVC</li> <li>Description: Shielded</li> <li>Connection systems: Flying leads</li> </ul>	DOL-1208-W02MA	6020992
1/2	<ul> <li>Connection type head A: Female connector, M12, 8-pin, angled</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 2 m, 8-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, shielded</li> <li>Connection systems: Flying leads</li> </ul>	DOL-1208- W02MAS01	6029224
3	<ul> <li>Connection type head A: Female connector, M12, 8-pin, angled</li> <li>Connection type head B: Flying leads</li> <li>Cable: 2 m, 8-wire, PUR, halogen-free</li> <li>Description: Unshielded</li> </ul>	DOL-1208-W02MC	6035623
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, angled</li> <li>Connection type head B: Flying leads</li> <li>Cable: 5 m, 8-wire, PVC</li> <li>Description: Shielded</li> </ul>	DOL-1208-W05MA	6021033

# DBS60E-B8ECD1024 | DBS60

INCREMENTAL ENCODERS

	Brief description	Туре	part no.
	Connection systems: Flying leads		
1	<ul> <li>Connection type head A: Female connector, M12, 8-pin, angled</li> <li>Connection type head B: Flying leads</li> <li>Cable: 5 m, 8-wire, PUR</li> <li>Description: Unshielded</li> </ul>	DOL-1208-W05MC	6035624
7	<ul> <li>Connection type head A: Female connector, M12, 8-pin, angled</li> <li>Connection type head B: Flying leads</li> <li>Cable: 10 m, 8-wire, PUR, halogen-free</li> <li>Description: Unshielded</li> </ul>	DOL-1208-W10MC	6035625

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

## **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

