

# KTM-WP11101PS08

**CONTRAST SENSORS** 





## Ordering information

Туре	part no.
KTM-WP11101PS08	1095813

Other models and accessories → www.sick.com/KTM

Illustration may differ



#### Detailed technical data

#### **Features**

Dimensions (W x H x D)	12 mm x 31.5 mm x 21 mm
Sensing distance	≤ 12.5 mm
Sensing distance tolerance	± 3 mm
Housing design	Small
Light source	LED, RGB <sup>1)</sup>
Wave length	470 nm, 525 nm, 625 nm
Light emission	Long side of housing
Light spot size	1.6 mm x 9.5 mm
Light spot direction	Vertical <sup>2)</sup>
Receiving filters	None
Adjustment	Teach-in button
Teach-in mode	2-point teach-in static/dynamic + proximity to mark ET: Teach-in dynamic: Q-signal switches during teach-in (up to 10 ms time delay for 1st mark)

 $<sup>^{1)}</sup>$  Average service life: 100,000 h at T<sub>U</sub> = +25 °C.

#### **Electronics**

Supply voltage	12 V DC 24 V DC <sup>1)</sup>
Ripple	$\leq$ 5 $V_{pp}^{2}$

 $<sup>^{1)}</sup>$  Limit values: DC 12 V (-10 %) ... DC 24 V (+20 %). Operation in short-circuit protected network max. 8 A.

<sup>&</sup>lt;sup>2)</sup> In relation to long side of housing.

 $<sup>^{\</sup>rm 2)}$  May not fall below or exceed UV tolerances.

<sup>3)</sup> Without load.

<sup>4)</sup> With light/dark ratio 1:1.

 $<sup>^{5)}</sup>$  Signal transit time with resistive load.

 $<sup>^{6)}</sup>$  Total current of all Outputs.

Current consumption	< 50 mA <sup>3)</sup>
Switching frequency	15 kHz <sup>4)</sup>
Response time	32 μs <sup>5)</sup>
Jitter	15 μs
Switching output	PNP
Switching output (voltage)	PNP: HIGH = $U_V \le 2 \text{ V} / \text{LOW approx. } 0 \text{ V}$
Switching mode	Dark switching
Output current I <sub>max.</sub>	50 mA <sup>6)</sup>
Retention time (ET)	28 ms, non-volatile memory
Time delay	None
Protection class	III
Circuit protection	U <sub>V</sub> connections, reverse polarity protected Output Q short-circuit protected Interference pulse suppression

 $<sup>^{1)}</sup>$  Limit values: DC 12 V (-10 %) ... DC 24 V (+20 %) . Operation in short-circuit protected network max. 8 A.

## Mechanics

Housing material	ABS
Display	LED indicator green: power on LED indicator, yellow: Status switching output Q
Optics material	PMMA
Connection type	Male connector M8, 4-pin
Weight	20 g

#### Ambient data

Ambient operating temperature	-10 °C +55 °C
Ambient temperature, storage	-20 °C +75 °C
Shock load	According to IEC 60068
Enclosure rating	IP67
UL File No.	NRKH.E348498 & NRKH7.E348498

## Connection type/pinouts

Connection type	Male connector M8, 4-pin
Pinouts	
BN 1	+ (L+)
WH 2	ET
BU 3	- (M)
BK 4	Q

### Certificates

EU declaration of conformity
------------------------------

<sup>2)</sup> May not fall below or exceed U<sub>V</sub> tolerances.

 $<sup>^{</sup>m 3)}$  Without load.

<sup>&</sup>lt;sup>4)</sup> With light/dark ratio 1:1.

<sup>5)</sup> Signal transit time with resistive load.

<sup>6)</sup> Total current of all Outputs.

## KTM-WP11101PS08 | KTM


## **CONTRAST SENSORS**

UK declaration of conformity	✓
ACMA declaration of conformity	✓
Moroccan declaration of conformity	✓
China RoHS	✓
cULus certificate	✓
Photobiological safety (IEC EN 62471)	✓

#### Classifications

<b>ECLASS 5.0</b> 27270906	
<b>ECLASS 5.1.4</b> 27270906	
ECLASS 6.0 27270906	
ECLASS 6.2 27270906	
ECLASS 7.0 27270906	
ECLASS 8.0 27270906	
ECLASS 8.1 27270906	
ECLASS 9.0 27270906	
ECLASS 10.0 27270906	
ECLASS 11.0 27270906	
ECLASS 12.0 27270906	
ETIM 5.0 EC001820	
ETIM 6.0 EC001820	
ETIM 7.0 EC001820	
ETIM 8.0 EC001820	
UNSPSC 16.0901 39121528	


## Dimensional drawing KTM-Mxxxxx1P, KTM-Wxxxxx1P

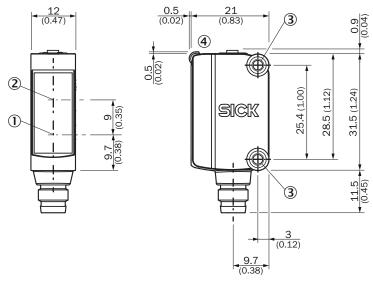

Dimensions in mm (inch)
① Center of optical axis, sender


- ② Center of optical axis, receiver
- 3 Mounting holes M3
- (4) display and adjustment elements

## Pinouts, see table Technical data: Connection type/pinouts



Male connector, M8, 4-pin, uncoded

## display and adjustment elements





- ① Teach-in button
- ② LED yellow
- 3 LED green


## Concept of operation Teach-in dynamic


#### 1. Position background

#### 2. Move at least the mark and background using the light spot.











Press the teach-in button and keep it pressed. LED flashing slowly.

Keep the teach-in button > 3 < 30 s pressed.

Release the teach-in button.

Yellow LED will illuminate, when emitted light is on the mark.






Teach via Teach button like standard KTM but darkswitching

- Q-Signal switches during teach-in
- Up to 10ms time delay at the 1.  $\mbox{mark}$
- Only for dark marks on bright background


## Setting the switching threshold (static)

#### 1. Position mark




Press and hold teach-in button > 1 < 3 s. Yellow LED flashes slowly.

#### 2. Position background



Press and hold teach-in button < 3 s. Yellow LED goes out.

## Sensing distance



#### Recommended accessories

Other models and accessories → www.sick.com/KTM

	Brief description	Туре	part no.		
Mounting syst	Mounting systems				
	<ul> <li>Description: Mounting bracket for wall mounting</li> <li>Material: Stainless steel</li> <li>Details: Stainless steel</li> <li>Items supplied: Mounting hardware included</li> <li>Suitable for: W8, W8G, W8 Laser, W8 Inox, G6, G6 Inox, W100 Laser, W100-2, KTM Core, KTM Prime, CSM, LUTM, W4S</li> </ul>	BEF-W100-A	5311520		
connectors ar	connectors and cables				
A Ro	<ul> <li>Connection type head A: Female connector, M8, 4-pin, straight, A-coded</li> <li>Connection type head B: Male connector, M12, 4-pin, straight, A-coded</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 5 m, 4-wire, PVC</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Zones with chemicals, Uncontaminated zones</li> </ul>	YF8U14-050VA3M2A14	2096609		
	<ul> <li>Connection type head A: Female connector, M8, 4-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 5 m, 4-wire, PVC</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Zones with chemicals, Uncontaminated zones</li> </ul>	YF8U14-050VA3XLEAX	2095889		

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

# **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

