

# DBS60B-TDHJB0000

DBS60

**INCREMENTAL ENCODERS** 





## Ordering information

Туре	part no.
DBS60B-TDHJB0000	1106878

Other models and accessories → www.sick.com/DBS60

Illustration may differ



#### Detailed technical data

### Safety-related parameters

MTTF <sub>D</sub> (mean time to dangerous failure)	500 years (EN ISO 13849-1) 1)

<sup>1)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40°C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

#### Performance

Pulses per revolution	10,000
Measuring step	≤ 90°, electric/pulses per revolution
Measuring step deviation	± 36° / pulses per revolution
Error limits	Measuring step deviation x 3
Duty cycle	≤ 0.5 ± 10 %

#### Interfaces

Communication interface	Incremental
Communication Interface detail	TTL / RS-422
Number of signal channels	6-channel
Initialization time	< 5 ms <sup>1)</sup>
Output frequency	+ 300 kHz <sup>2)</sup>
Load current	≤ 30 mA, per channel
Power consumption	≤ 1 W (without load)

 $<sup>^{1)}</sup>$  Valid signals can be read once this time has elapsed.

#### **Electronics**

Connection type	Cable, 8-wire, universal, 0.5 m <sup>1)</sup>	
Supply voltage	4.5 30 V	
Reference signal, number	1	
Reference signal, position	90°, electric, logically gated with A and B	

<sup>1)</sup> The universal cable connection is positioned so that it is possible to lay it without bends in a radial or axial direction.

<sup>&</sup>lt;sup>2)</sup> Up to 450 kHz on request.

 $<sup>^{2)}</sup>$  Short-circuit opposite to another channel or GND permissible for max. 60 s. No protection signal against U<sub>S</sub>.

Reverse polarity protection	<b>✓</b>
Short-circuit protection of the outputs	<b>✓</b> <sup>2)</sup>

 $<sup>^{1)}</sup>$  The universal cable connection is positioned so that it is possible to lay it without bends in a radial or axial direction.

#### Mechanics

Mechanical design	Through hollow shaft
Shaft diameter	10 mm Front clamp
Flange type / stator coupling	Stator coupling, 2-sided, screw hole circle 63 mm
Weight	+ 0.25 kg <sup>1)</sup>
Shaft material	Stainless steel
Flange material	Aluminum
Housing material	Aluminum
Material, cable	PVC
Start up torque	+ 0.5 Ncm (+20 °C)
Operating torque	0.4 Ncm (+20 °C)
Permissible movement static	$\pm$ 0.3 mm (radial) $\pm$ 0.5 mm (axial) $^{2)}$
Permissible movement dynamic	$\pm$ 0.1 mm (radial) $\pm$ 0.2 mm (axial) <sup>2)</sup>
Operating speed	6,000 min <sup>-1 3)</sup>
Maximum operating speed	9,000 min <sup>-1</sup> <sup>4)</sup>
Moment of inertia of the rotor	50 gcm <sup>2</sup>
Bearing lifetime	3.6 x 10 <sup>9</sup> revolutions
Angular acceleration	≤ 500,000 rad/s²

 $<sup>^{1)}</sup>$  Based on encoder with male connector or cable with male connector.

#### Ambient data

EMC	According to EN 61000-6-2 and EN 61000-6-3
Enclosure rating	IP65, housing side (IEC 60529) IP65, shaft side (IEC 60529)
Permissible relative humidity	90 % (Condensation not permitted)
Operating temperature range	-20 °C +85 °C <sup>1)</sup>
Storage temperature range	-40 °C +100 °C, without package
Resistance to shocks	250 g, 3 ms (EN 60068-2-27)
Resistance to vibration	30 g, 10 Hz 2,000 Hz (EN 60068-2-6)

 $<sup>^{1)}</sup>$  These values relate to all mechanical versions including recommended accessories unless otherwise noted.

#### Certificates

EU declaration of conformity
------------------------------

 $<sup>^{2)}</sup>$  Short-circuit opposite to another channel or GND permissible for max. 60 s. No protection signal against U<sub>S</sub>.

 $<sup>^{2)}\,\</sup>mathrm{Not}$  apllicable for stator coupling type C and K.

 $<sup>^{3)}</sup>$  Allow for self-heating of 2.6 K per 1,000 rpm when designing the operating temperature range.

<sup>&</sup>lt;sup>4)</sup> Maximum speed which does not cause mechanical damage to the encoder. Impact on the service life and signal quality is possible. Please note the maximum output frequency.

## **DBS60B-TDHJB0000 | DBS60**


**INCREMENTAL ENCODERS** 


ACMA declaration of conformity	✓
China RoHS	✓
cULus certificate	✓

#### Classifications

ECLASS 5.0	27270501
ECLASS 5.1.4	27270501
ECLASS 6.0	27270590
ECLASS 6.2	27270590
ECLASS 7.0	27270501
ECLASS 8.0	27270501
ECLASS 8.1	27270501
ECLASS 9.0	27270501
ECLASS 10.0	27270501
ECLASS 11.0	27270501
ECLASS 12.0	27270501
ETIM 5.0	EC001486
ETIM 6.0	EC001486
ETIM 7.0	EC001486
ETIM 8.0	EC001486
UNSPSC 16.0901	41112113

## Dimensional drawing

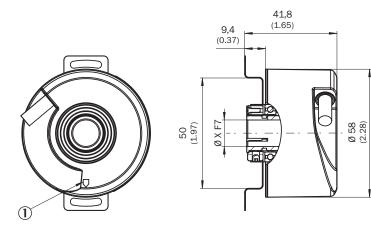



#### Dimensions in mm (inch)


XF7 values see shaft diameter table for through hollow shaft, clamping at the front

- ① Zero pulse mark on housing
- 2 zero pulse mark on flange under stator coupling

© zero paide mark or hange under stator deapling	
TypeThrough hollow shaft with front clamping	Shaft diameter XF7
DBS60x-TAxxxxxxxx DBS60x-T1xxxxxxxxx	6 mm
DBS60x-TBxxxxxxxx	8 mm

TypeThrough hollow shaft with front clamping	Shaft diameter XF7
DBS60x-T2xxxxxxxxx	
DBS60x-TCxxxxxxxxx DBS60x-T3xxxxxxxxx	3/8″
DBS60x-TDxxxxxxxx DBS60x-T4xxxxxxxxx	10 mm
DBS60x-TExxxxxxxxx DBS60x-T5xxxxxxxxx	12 mm
DBS60x-TFxxxxxxxxx DBS60x-T6xxxxxxxxx	1/2"
DBS60x-TGxxxxxxxx DBS60x-T7xxxxxxxxx	14 mm
DBS60x-THxxxxxxxxx DBS60x-T8xxxxxxxxx	15 mm
DBS60x-TJxxxxxxxxx	5/8″
	-

## Attachment specifications Through hollow shaft with front clamping




customer side

TypeThrough hollow shaft with front clamping	Shaft diameter xj7
DBS60x-TAxxxxxxxx DBS60x-T1xxxxxxxx	6 mm
DBS60x-TBxxxxxxxx DBS60x-T2xxxxxxxx	8 mm
DBS60x-TCxxxxxxxxx DBS60x-T3xxxxxxxxx	3/8″
DBS60x-TDxxxxxxxx DBS60x-T4xxxxxxxx	10 mm
DBS60x-TExxxxxxxx DBS60x-T5xxxxxxxx	12 mm
DBS60x-TFxxxxxxxx DBS60x-T6xxxxxxxx	1/2"
DBS60x-TGxxxxxxxx DBS60x-T7xxxxxxxx	14 mm
DBS60x-THxxxxxxxxx DBS60x-T8xxxxxxxxx	15 mm
DBS60x-TJxxxxxxxxx	5/8"

# DBS60B-TDHJB0000 | DBS60

INCREMENTAL ENCODERS


## PIN assignment




Wire colors (ca- ble connection)	Male connector M12, 8-pin	Male connector M23, 12-pin	TTL/HTL 6- channel signal	Explanation	
Brown	1	6	A-	Signal wire	
White	2	5	А	Signal wire	
Black	3	1	B-	Signal wire	
Pink	4	8	В	Signal wire	
Yellow	5	4	Z-	Signal wire	
Purple	6	3	Z	Signal wire	
Blue	7	10	GND	Ground connection	
Red	8	12	+U <sub>s</sub>	Supply voltage	
-	-	9	Not assigned	Not assigned	
-	-	2	Not assigned	Not assigned	
-	-	11	Not assigned	Not assigned	
-	-	7	Not assigned	Not assigned	
Screen	Screen	Screen	Screen	Screen connected to encoder housing	

## Diagrams



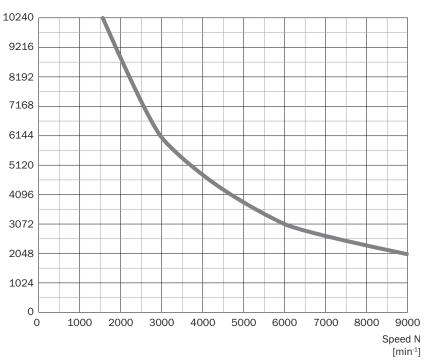

## Diagrams Signal outputs for electrical interfaces TTL and HTL



Cw with view on the encoder shaft in direction "A", compare dimensional drawing.

Supply voltage	Output
4,5 V 5,5 V	πL
10 V 30 V	ΠL
10 V 27 V	HTL

Supply voltage	Output
4,5 V 30 V	TTL/HTL universal
4,5 V 30 V	ΠL

## Recommended accessories

Other models and accessories → www.sick.com/DBS60

	Brief description	Туре	part no.		
connectors and cables					
	Connection type head A: Flying leads Connection type head B: Flying leads Signal type: SSI, Incremental, HIPERFACE Items supplied: By the meter Cable: 8-wire, PUR, halogen-free Description: SSI, shielded, Incremental, HIPERFACE  Description: SSI, shielded, Incremental, HIPERFACE	LTG-2308-MWENC	6027529		
<u></u>	Connection type head A: Flying leads Connection type head B: Flying leads Signal type: SSI, Incremental Items supplied: By the meter Cable: 11-wire, PUR Description: SSI, shielded, Incremental	LTG-2411-MW	6027530		
	Connection type head A: Flying leads Connection type head B: Flying leads Signal type: SSI, Incremental Items supplied: By the meter Cable: 12-wire, PUR, halogen-free Description: SSI, shielded, Incremental	LTG-2512-MW	6027531		
<b>\</b>	Connection type head A: Flying leads Connection type head B: Flying leads Signal type: SSI, TTL, HTL, Incremental Items supplied: By the meter Cable: 12-wire, UV and saltwater-resistant, PUR, halogen-free Description: SSI, shielded, TTL, HTL, Incremental	LTG-2612-MW	6028516		
	Connection type head A: Male connector, M23, 12-pin, straight, A-coded Signal type: HIPERFACE <sup>®</sup> , SSI, Incremental Description: HIPERFACE <sup>®</sup> , shieldedSSIIncremental Connection systems: Solder connection	STE-2312-G01	2077273		
	Connection type head A: Male connector, M23, 12-pin, straight, A-coded Signal type: HIPERFACE <sup>®</sup> , SSI, Incremental Description: HIPERFACE <sup>®</sup> , shieldedSSIIncremental Connection systems: Solder connection	STE-2312-GX	6028548		
	Connection type head A: Male connector, M12, 8-pin, straight, A-coded Signal type: Incremental Cable: CAT5, CAT5e Description: Incremental, shielded Connection systems: IDC quick connection Permitted cross-section: 0.14 mm² 0.34 mm²	STE-1208-GA01	6044892		

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

## **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

