



DATA SHEET

GSE6L-P6211

G6
Photoelectric sensors

PHOTOELECTRIC SENSORS

GSE6L-P6211

ORDERING INFORMATION

Type	part no.
GSE6L-P6211	1109730

Further device versions and accessories at www.sick.com/G6



Illustration may differ



DETAILED TECHNICAL DATA

FEATURES

Functional principle	Through-beam photoelectric sensor
Sensing range	Sensing range min. 0 m Sensing range max. 40 m Recommended sensing range for the best performance 0 m ... 30 m
Polarisation filter	No
Emitted beam	Light source Laser Type of light Visible red light Shape of light spot Point-shaped Light spot size (distance) \varnothing 3.5 mm (1,000 mm) Maximum dispersion of the emitted beam around the standardized transmission axis (squint angle) $< \pm 1.5^\circ$ (at $T_a = +23^\circ\text{C}$)
Key laser figures	Normative reference IEC 60825-1 / CDRH 21 CFR 1040.10 & 1040.11 Laser class 1 ¹⁾ Wave length 680 nm Pulse duration 3 μs Maximum pulse power ≤ 7.8 mW Average service life 100,000 h at $T_a = +25^\circ\text{C}$
Smallest detectable object (MDO) typ.	

¹⁾ Do not intentionally look into the laser beam. Never point the laser beam at people's eyes.

		3.5 mm, at 1 m distance (object with 90% remission factor (corresponds to standard white according to DIN 5033))
Adjustment	Potentiometer	For setting the sensing range
	Operating mode switch	For inverting the switching function (light/dark switching)
Display	LED green	Operating indicator Static on: power on
	LED yellow	Status of received light beam Static on: object present Static off: object not present

¹⁾ Do not intentionally look into the laser beam. Never point the laser beam at people's eyes.

SAFETY-RELATED PARAMETERS

MTTF ₀	1,005 years
DC _{avg}	0 %
T _M (mission time)	10 years

ELECTRONICS

Supply voltage U _B	10 V DC ... 30 V DC ¹⁾
Ripple	< 5 V _{pp}
Usage category	DC-13 (According to EN 60947-5-2)
Current consumption	≤ 20 mA, without load. At U _B = 24 V
Protection class	III
Digital output	
	Number 2
	Type PNP
	Switching mode Light/dark switching
	Signal voltage NPN HIGH/LOW Approx. U _B / ≤ 3 V
	Output current I _{max} ≤ 100 mA ²⁾
	Circuit protection outputs Reverse polarity protected Overcurrent protected Short-circuit protected
	Response time ≤ 625 μs
	Switching frequency 1,000 Hz ³⁾
Pin/Wire assignment	
	Function of pin 4/black (BK) Digital output, light switching, object present → output Q LOW
	Function of pin 4/black (BK) – detail The pin 4 function of the sensor can be switched Additional possible settings via operating mode switch

¹⁾ Limit values.

²⁾ At U_B > 24 V, I_{max} = 50 mA.

³⁾ With light/dark ratio 1:1.

MECHANICS

Housing	Rectangular
Dimensions (W x H x D)	12 mm x 31.5 mm x 21 mm
Connection	Cable with M8 male connector, 4-pin, 336 mm
Connection detail	
	Deep-freeze property Do not bend below 0 °C
	Conductor size 0.14 mm ²
	Cable diameter Ø 8 mm

PHOTOELECTRIC SENSORS - GSE6L-P6211

	Length of cable (L)	300 mm
Material	Housing	Plastic, ABS
	Front screen	Plastic, PMMA
	Cable	Plastic, PVC
	Male connector	Metal, copper alloy (C3604 CUZN39PB3)
Weight		Approx. 60 g

AMBIENT DATA

Enclosure rating	IP67 (EN 60529)
Ambient operating temperature	-20 °C ... +50 °C ^{1, 2)}
Ambient temperature, storage	-40 °C ... +70 °C
Typ. Ambient light immunity	Sunlight: ≤ 13,000 lx
Shock resistance	30 g, 11 ms (3 positive and 3 negative shocks along X, Y, Z axes, 18 total shocks (EN60068-2-27))
Vibration resistance	10 Hz ... 55 Hz (Amplitude 0.5 mm, 3 x 30 min (EN60068-2-6))
Air humidity	35 % ... 95 %, relative humidity (no condensation)
Electromagnetic compatibility (EMC)	EN 60947-5-2
UL File No.	NRKH.E348498 & NRKH7.E348498


¹⁾ As of $T_a \geq 45$ °C, a max. supply voltage $U_B = 24$ V and a max. load current $I_{max} = 50$ mA is permitted.

²⁾ Below $T_a = -20$ °C, a warm-up time of 3 seconds is required.

CERTIFICATES

EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
Moroccan declaration of conformity	✓
China RoHS	✓
cULus certificate	✓
Laser safety (IEC 60825-1) declaration of manufacturer	✓


PINOUTS

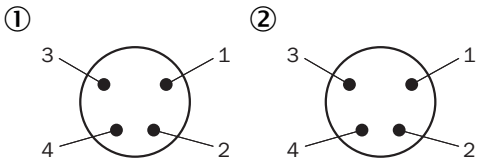

male connector M8, 4-pin

- ① receiver
- ② sender

CONNECTION DIAGRAM CD-057

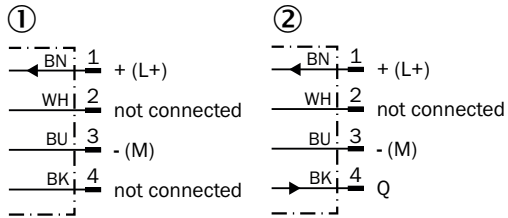

- ① sender
- ② receiver


TRUTH TABLE PNP - LIGHT SWITCHING

	Light switching Q (normally closed)	
	Object not present → Output HIGH	Object present → Output LOW
Light receive	✔	✘
Light receive indicator	☀	✘
Load resistance	⚡	✘

TRUTH TABLE PNP - DARK SWITCHING


	Dark switching \bar{Q} (normally open)	
	Object not present → Output LOW	Object present → Output HIGH
Light receive	✓	✗
Light receive indicator	☀	✗
Load resistance	✗	⚡

CHARACTERISTIC CURVE

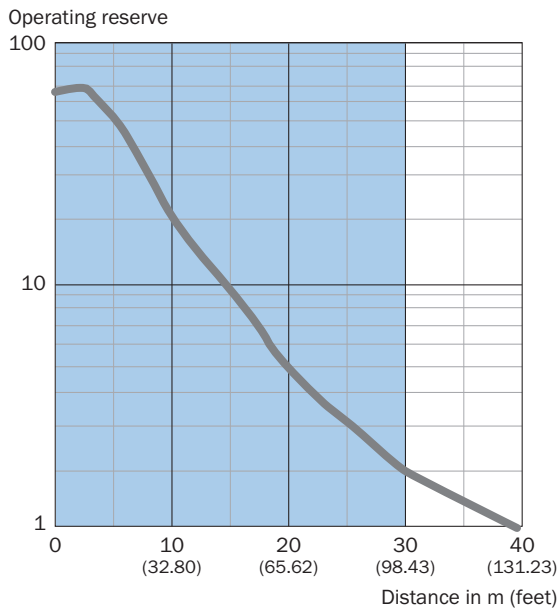


Recommended sensing range for the best performance

LIGHT SPOT SIZE



SENSING RANGE DIAGRAM

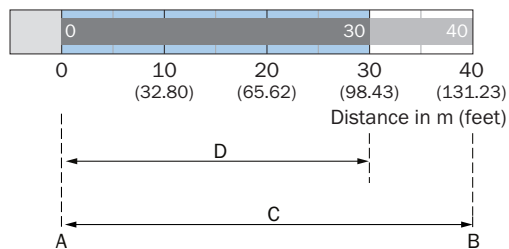

- A = Sensing range min. in m
- B = Sensing range max. in m
- C = Viewing range
- D = Adjustable switching threshold

Recommended sensing range for the best performance

Further information as well as suitable accessories, example applications and downloads such as CAD dimensional models, operating instructions and software can be found at www.sick.com/1109730



SICK AG
WALDKIRCH
GERMANY
SICK.COM

SICK AT A GLANCE

SICK is a leading global technology company for intelligent sensors and integrated solutions in industrial automation. Our technologies set benchmarks, making your industrial processes more efficient, safer and more sustainable – both in logistics and manufacturing operations.

SICK combines sensor intelligence with industry expertise and certified consulting services. We provide the ideal foundation for scalable as well as tailor-made automation solutions and create added value along the entire value chain. Our close partnerships with our customers are more than just a promise: Together, we optimize productivity, improve quality, protect health and safety, and help build a sustainable future. All with empathy and trust.

Since 1946, we have been developing innovative technologies with passion and a pioneering spirit. With a global network in around 40 countries, SICK has a global presence and is always close by. The company's headquarters are located in Waldkirch near Freiburg, Germany. Our customers benefit from our understanding of both local and global requirements, which enables us to deliver tailor-made solutions

SICK
Sensor Intelligence