

SICK.COM



DATA SHEET

WTB4FP-2216R150A00

W4
Photoelectric sensors

SICK Sensor Intelligence

PHOTOELECTRIC SENSORS

WTB4F-
P-2216R150A00

ORDERING INFORMATION

Type	part no.
WTB4FP-2216R150A00	1119989

Further device versions and accessories at www.sick.com/W4



Illustration may differ

DETAILED TECHNICAL DATA

FEATURES

Functional principle	Photoelectric proximity sensor	
Functional principle detail	Background suppression, MultiSwitch, distance value	
Sensing range	Sensing range min.	4 mm
	Sensing range max.	220 mm
Adjustable switching threshold for background suppression	15 mm ... 220 mm	
Reference object	Object with 90% remission factor (complies with standard white according to DIN 5033)	
Minimum distance between set sensing range and background (black 6% / white 90%)	3 mm, at a distance of 80 mm	
Recommended sensing range for the best performance	40 mm ... 140 mm	
Distance value	Measuring range	15 mm ... 220 mm
	Repeatability	0,3 mm ... 2,2 mm ^{1) 2) 3)}
	Accuracy	Typ. 3.0 mm at 15 ... 50 mm distance ¹⁾
		Typ. 4.5 mm at 50 ... 100 mm distance ¹⁾
		Typ. 6.5 mm at 100 ... 150 mm distance ¹⁾
		Typ. 12 mm at 150 ... 220 mm distance ¹⁾
	Distance value output	Via IO-Link
	Resolution	1 mm

¹⁾ 6% ... 90% remission factor.

²⁾ Equivalent to 1 σ.

³⁾ See repeatability characteristic lines.

Update rate of the distance value	20 ms	
Emitted beam	Light source	PinPoint LED
	Type of light	Visible red light
	Shape of light spot	Point-shaped
	Light spot size (distance)	Ø 4.2 mm (130 mm)
	Maximum dispersion of the emitted beam around the standardized transmission axis (squint angle)	< +/- 1.5° (at T _u = +23 °C)
Key LED figures	Normative reference	EN 62471:2008-09 IEC 62471:2006, modified
	LED risk group marking	Free group
	Wave length	635 nm
	Average service life	100,000 h at T _a = +25 °C
Smallest detectable object (MDO) typ.	0.2 mm, At 130 mm distance (object with remission factor of 90% (complies with standard white according to DIN 5033))	
Adjustment	Teach-in button	BluePilot For setting the sensing range
	IO-Link	For configuring the sensor parameters and Smart Task functions
Display	LED blue	BluePilot: Display of mode, display of output states Q ₁ (LED 1-3 permanently on) and Q ₁₂ (LED 5-7 permanently on)
	LED green	Operating indicator Static on: power on Flashing: IO-Link mode
	LED yellow	Status of received light beam Static on: object present Static off: object not present

¹⁾ 6% ... 90% remission factor.

²⁾ Equivalent to 1σ.

³⁾ See repeatability characteristic lines.

SAFETY-RELATED PARAMETERS

MTTF _D	642 years
DC _{avg}	0 %
T _M (mission time)	20 years

COMMUNICATION INTERFACE

IO-Link	✓, IO-Link V1.1
Data transmission rate	COM2 (38,4 kBaud)
Cycle time	2,3 ms
Process data length	16 Bit
Process data structure	Bit 0 = switching signal Q ₁ Bit 1 = switching signal Q ₁₂ Process data structure: A: Bit 2 ... 15 = Current receiver level (live). Process data structure B: Bit 2 ... 15 = Distance to object. Can be switched between A and B via IO-Link.
VendorID	26
DeviceID HEX	0x8002B4
DeviceID DEC	8389300
Compatible master port type	A
SIO mode support	Yes

ELECTRONICS

Supply voltage U_B	10 V DC ... 30 V DC ¹⁾																		
Ripple	$\leq 5 V_{pp}$																		
Usage category	DC-12 (According to EN 60947-5-2) DC-13 (According to EN 60947-5-2)																		
Current consumption	≤ 25 mA, without load. At $U_B = 24$ V																		
Protection class	III																		
Digital output	<table border="0"> <tr> <td>Number</td> <td>2 (individually adjustable)</td> </tr> <tr> <td>Type</td> <td>Push-pull: PNP/NPN</td> </tr> <tr> <td>Signal voltage PNP HIGH/LOW</td> <td>Approx. $U_B - 2.5$ V / 0 V</td> </tr> <tr> <td>Signal voltage NPN HIGH/LOW</td> <td>Approx. $U_B / < 2.5$ V</td> </tr> <tr> <td>Output current I_{max}</td> <td>≤ 100 mA</td> </tr> <tr> <td>Circuit protection outputs</td> <td>Reverse polarity protected Overcurrent protected Short-circuit protected</td> </tr> <tr> <td>Response time</td> <td>$\leq 1,000 \mu s$ ²⁾</td> </tr> <tr> <td>Repeatability (response time)</td> <td>360 μs</td> </tr> <tr> <td>Switching frequency</td> <td>500 Hz ³⁾</td> </tr> </table>	Number	2 (individually adjustable)	Type	Push-pull: PNP/NPN	Signal voltage PNP HIGH/LOW	Approx. $U_B - 2.5$ V / 0 V	Signal voltage NPN HIGH/LOW	Approx. $U_B / < 2.5$ V	Output current I_{max}	≤ 100 mA	Circuit protection outputs	Reverse polarity protected Overcurrent protected Short-circuit protected	Response time	$\leq 1,000 \mu s$ ²⁾	Repeatability (response time)	360 μs	Switching frequency	500 Hz ³⁾
Number	2 (individually adjustable)																		
Type	Push-pull: PNP/NPN																		
Signal voltage PNP HIGH/LOW	Approx. $U_B - 2.5$ V / 0 V																		
Signal voltage NPN HIGH/LOW	Approx. $U_B / < 2.5$ V																		
Output current I_{max}	≤ 100 mA																		
Circuit protection outputs	Reverse polarity protected Overcurrent protected Short-circuit protected																		
Response time	$\leq 1,000 \mu s$ ²⁾																		
Repeatability (response time)	360 μs																		
Switching frequency	500 Hz ³⁾																		
Pin/Wire assignment	<table border="0"> <tr> <td>Function of pin 4/black (BK)</td> <td>Digital output, dark switching, object present \rightarrow output Q_U LOW; IO-Link communication C ⁴⁾</td> </tr> <tr> <td>Function of pin 4/black (BK) – detail</td> <td>The pin 4 function of the sensor can be configured Additional possible settings via IO-Link</td> </tr> <tr> <td>Function of pin 2/white (WH)</td> <td>Digital output, dark switching, object present \rightarrow output Q_{L2} LOW ⁴⁾</td> </tr> <tr> <td>Function of pin 2/white (WH) – detail</td> <td>The pin 2 function of the sensor can be configured Additional possible settings via IO-Link</td> </tr> </table>	Function of pin 4/black (BK)	Digital output, dark switching, object present \rightarrow output Q_U LOW; IO-Link communication C ⁴⁾	Function of pin 4/black (BK) – detail	The pin 4 function of the sensor can be configured Additional possible settings via IO-Link	Function of pin 2/white (WH)	Digital output, dark switching, object present \rightarrow output Q_{L2} LOW ⁴⁾	Function of pin 2/white (WH) – detail	The pin 2 function of the sensor can be configured Additional possible settings via IO-Link										
Function of pin 4/black (BK)	Digital output, dark switching, object present \rightarrow output Q_U LOW; IO-Link communication C ⁴⁾																		
Function of pin 4/black (BK) – detail	The pin 4 function of the sensor can be configured Additional possible settings via IO-Link																		
Function of pin 2/white (WH)	Digital output, dark switching, object present \rightarrow output Q_{L2} LOW ⁴⁾																		
Function of pin 2/white (WH) – detail	The pin 2 function of the sensor can be configured Additional possible settings via IO-Link																		

¹⁾ Limit values.²⁾ Signal transit time with resistive load in switching mode.³⁾ With light/dark ratio 1:1.⁴⁾ This switching output must not be connected to another output.**MECHANICS**

Housing	Rectangular						
Design detail	Flat						
Dimensions (W x H x D)	16 mm x 40.1 mm x 12.1 mm						
Connection	Male connector M8, 4-pin						
Material	<table border="0"> <tr> <td>Housing</td> <td>Plastic, VISTAL®</td> </tr> <tr> <td>Front screen</td> <td>Plastic, PMMA</td> </tr> <tr> <td>Male connector</td> <td>Plastic, VISTAL®</td> </tr> </table>	Housing	Plastic, VISTAL®	Front screen	Plastic, PMMA	Male connector	Plastic, VISTAL®
Housing	Plastic, VISTAL®						
Front screen	Plastic, PMMA						
Male connector	Plastic, VISTAL®						
Weight	Approx. 30 g						
Maximum tightening torque of the fixing screws	0.4 Nm						

AMBIENT DATA

Enclosure rating	IP66 (EN 60529) IP67 (EN 60529)
Ambient operating temperature	-40 °C ... +60 °C
Ambient temperature, storage	-40 °C ... +75 °C
Typ. Ambient light immunity	Artificial light: $\leq 50,000$ lx Sunlight: $\leq 50,000$ lx
Shock resistance	30 g, 11 ms (3 positive and 3 negative shocks along X, Y, Z axes, 18 total shocks (EN60068-2-27))
Vibration resistance	10 Hz ... 1,000 Hz (Amplitude 1 mm, 3 x 30 min (EN60068-2-6))
Air humidity	35 % ... 95 %, relative humidity (no condensation)

Electromagnetic compatibility (EMC)	EN 60947-5-2
Resistance to cleaning agent	ECOLAB
UL File No.	NRKH.E181493 & NRKH7.E181493

SMART TASK

Smart Task name	Base logics
Logic function	Direct AND OR Window Hysteresis
Timer function	Deactivated Switch-on delay Off delay ON and OFF delay Impulse (one shot)
Inverter	Yes
Switching frequency	SIO Logic: 450 Hz ¹⁾ IOL: 450 Hz ²⁾
Response time	SIO Logic: 1100 µs ¹⁾ IOL: 1100 µs ²⁾
Repeatability	SIO Logic: 400 µs ¹⁾ IOL: 450 µs ²⁾
Switching signal	Switching signal Q _{L1} Switching output Switching signal Q _{L2} Switching output

¹⁾ Use of Smart Task functions without IO-Link communication (SIO mode).

²⁾ Use of Smart Task functions with IO-Link communication function.


DIAGNOSIS

Device temperature	Measuring range	Very cold, cold, moderate, warm, hot
Device status		Yes
Detailed device status		Yes
Operating hour counter		Yes
Operating hours counter with reset function		Yes
Quality of teach		Yes

CERTIFICATES


EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
Moroccan declaration of conformity	✓
China RoHS	✓
ECOLAB certificate	✓
cULus certificate	✓
IO-Link certificate	✓
Information according to Art. 3 of Data Act (Regulation EU 2023/2854)	✓

DISPLAY AND ADJUSTMENT ELEMENTS




- ① LED blue
- ② indicator switching output mode
- ③ indicator distance mode
- ④ Teach-in button
- ⑤ LED yellow
- ⑥ LED green

CONNECTION TYPE MALE CONNECTOR M8, 4-PIN



CONNECTION DIAGRAM CD-520



TRUTH TABLE PUSH-PULL: PNP/NPN - DARK SWITCHING QL2


	Dark switching Q_{L2} (normally closed (upper switch), normally open (lower switch))	
	Object not present → Output HIGH	Object present → Output LOW
Light receive	✗	✔
Light receive indicator	✗	☀
Load resistance to L+	✗	⚡
Load resistance to M	⚡	✗

TRUTH TABLE PUSH-PULL: PNP/NPN - DARK SWITCHING QL1


	Dark switching Q_{L1} (normally closed (upper switch), normally open (lower switch))	
	Object not present → Output HIGH	Object present → Output LOW
Light receive	⊗	☑
Light receive indicator	⊗	☀
Load resistance to L+	⊗	⚡
Load resistance to M	⚡	⊗

CHARACTERISTIC CURVE

Minimum distance in mm (y) between the set sensing range and white background (90 % remission)

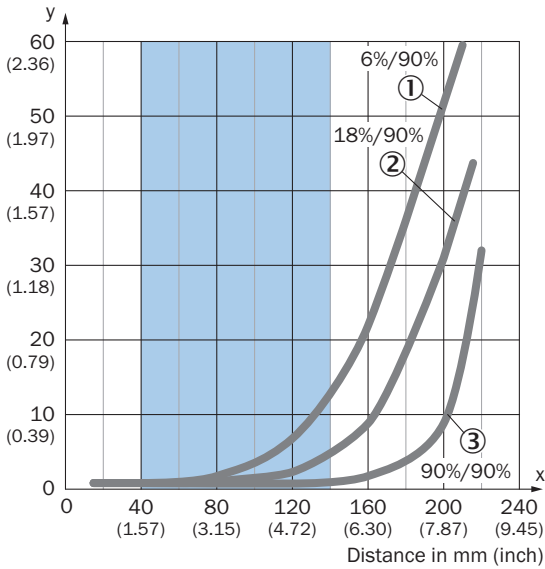

Example:
Safe suppression of the background

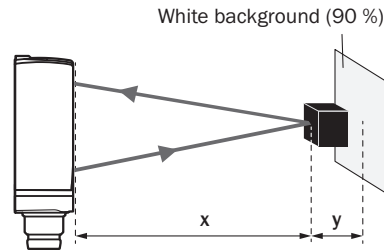



Black object (6 % remission)
Set sensing range $x = 120$ mm
Needed minimum distance to white background $y = 7$ mm

Recommended sensing range for the best performance

- ① Black object, 6% remission factor
- ② Gray object, 18% remission factor
- ③ White object, 90% remission factor


LIGHT SPOT SIZE

Dimensions in mm (inch)

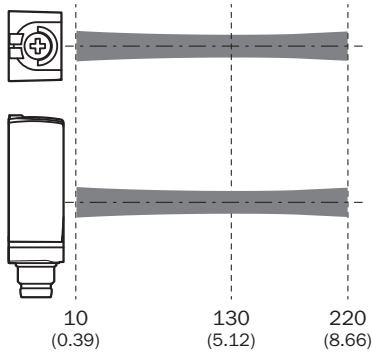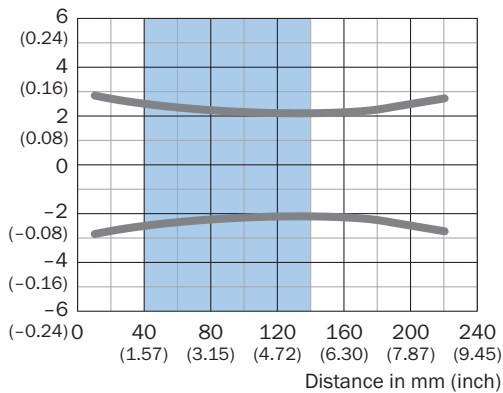

Recommended sensing range for the best performance

SENSING RANGE DIAGRAM

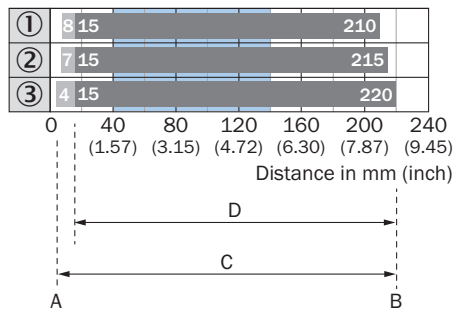


A = Sensing range min. in mm
 B = Sensing range max. in mm
 C = Viewing range
 D = Adjustable switching threshold for background suppression

Recommended sensing range for the best performance

- ① Black object, 6% remission factor
- ② Gray object, 18% remission factor
- ③ White object, 90% remission factor

REPEATABILITY

Repeatability in mm (inch)

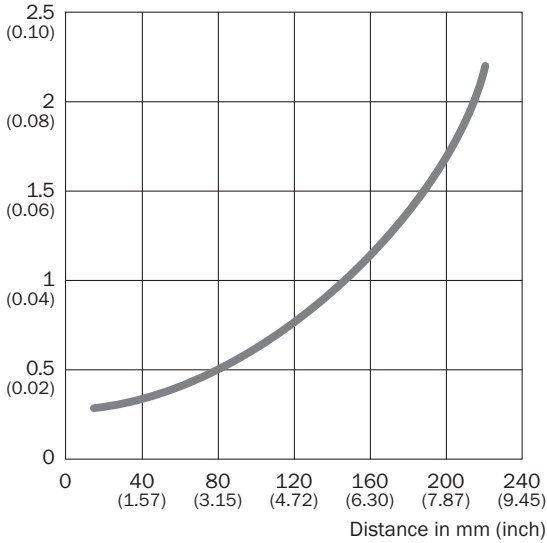

DIMENSIONAL DRAWING



Dimensions in mm (inch)

- ① Standard direction of the material being detected
- ② Center of optical axis, sender
- ③ Center of optical axis, receiver
- ④ M3 mounting hole
- ⑤ Connection
- ⑥ display and adjustment elements

Further information as well as suitable accessories, example applications and downloads such as CAD dimensional models, operating instructions and software can be found at www.sick.com/1119989



SICK AG
WALDKIRCH
GERMANY
SICK.COM

SICK AT A GLANCE

SICK is a leading global technology company for intelligent sensors and integrated solutions in industrial automation. Our technologies set benchmarks, making your industrial processes more efficient, safer and more sustainable – both in logistics and manufacturing operations.

SICK combines sensor intelligence with industry expertise and certified consulting services. We provide the ideal foundation for scalable as well as tailor-made automation solutions and create added value along the entire value chain. Our close partnerships with our customers are more than just a promise: Together, we optimize productivity, improve quality, protect health and safety, and help build a sustainable future. All with empathy and trust.

Since 1946, we have been developing innovative technologies with passion and a pioneering spirit. With a global network in around 40 countries, SICK has a global presence and is always close by. The company's headquarters are located in Waldkirch near Freiburg, Germany. Our customers benefit from our understanding of both local and global requirements, which enables us to deliver tailor-made solutions

SICK
Sensor Intelligence