



# RAY26P-34162330A00


RAY26 Reflex Array

PHOTOELECTRIC SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ



### Ordering information

| Type               | part no. |
|--------------------|----------|
| RAY26P-34162330A00 | 1221943  |

Other models and accessories → [www.sick.com/RAY26\\_Reflex\\_Array](http://www.sick.com/RAY26_Reflex_Array)

### Detailed technical data

#### Features

|  |   |
|--|---|
| <b>Functional principle</b>                | Photoelectric retro-reflective sensor   |
| <b>Functional principle detail</b>         | Without reflector minimum distance (autocollimation/coaxial optics), Reflex Array   |
| <b>Dimensions (W x H x D)</b>              | 24.6 mm x 82.5 mm x 53.3 mm   |
| <b>Housing design (light emission)</b>     | Rectangular   |
| <b>Minimum object size</b>                 | 3 mm, 5 mm, 10 mm, position-independent detection within the light array (factory setting), position-independent detection within the light array, position-independent detection within the light array, adjustable via IO-Link incl. adjustable conveyor belt suppression, adjustable via IO-Link incl. adjustable conveyor belt suppression, adjustable via IO-Link incl. adjustable conveyor belt suppression |
| <b>Detection height</b>                    | 55 mm   |
| <b>Sensing range max.</b>                  | 0 m ... 2 m <sup>1) 2)</sup><br>0 m ... 3 m <sup>1) 3)</sup><br>0 m ... 4.5 m <sup>1) 4)</sup>  |
| <b>Distance of the sensor to reflector</b> | ≥ 0 m   |
| <b>Conveyor belt suppression</b>           | Manual, via IO-Link   |
| <b>Type of light</b>                       | Visible red light   |
| <b>Light source</b>                        | PinPoint LED <sup>5)</sup>  |
| <b>Light spot size (distance)</b>          | 55 mm x 9 mm (1 m)  |
| <b>Wave length</b>                         | 635 nm  |
| <b>Adjustment</b>                          | BluePilot: Teach-in, IO-Link  |
| <b>Pin 2 configuration</b>                 | External Input (test), Teach-in, switching signal   |
| <b>AutoAdapt</b>                           | ✓   |

<sup>1)</sup> Reflector PL80A.

<sup>2)</sup> At minimum object size 3 mm.

<sup>3)</sup> At minimum object size 5 mm.

<sup>4)</sup> At minimum object size 10 mm.

<sup>5)</sup> Average service life: 100,000 h at T<sub>U</sub> = +25 °C.

|                             |  |
|-----------------------------|--|
| <b>Special applications</b> | Detecting objects with position tolerances, Detecting perforated objects, Detecting uneven, shiny objects, Detecting transparent objects, Detecting flat objects |
|-----------------------------|--|

<sup>1)</sup> Reflector PL80A.

<sup>2)</sup> At minimum object size 3 mm.

<sup>3)</sup> At minimum object size 5 mm.

<sup>4)</sup> At minimum object size 10 mm.

<sup>5)</sup> Average service life: 100,000 h at  $T_U = +25\text{ °C}$ .

## Mechanics/electronics

|  |   |
|--|---|
| <b>Supply voltage <math>U_B</math></b>     | 10 V DC ... 30 V DC <sup>1)</sup>   |
| <b>Ripple</b>                              | < 5 V <sub>pp</sub>   |
| <b>Current consumption</b>                 | 25 mA <sup>2)</sup><br>40 mA <sup>3)</sup>  |
| <b>Switching output</b>                    | Push-pull: PNP/NPN <sup>4)</sup>  |
| <b>Output: <math>Q_{L1}</math> / C</b>     | Switching output or IO-Link mode  |
| <b>Output function</b>                     | Factory setting: Pin 2 / white (MF): NPN normally closed (light switching), PNP normally open (dark switching), Pin 4 / black ( $Q_{L1}$ / C): NPN normally open (dark switching), PNP normally closed (light switching), IO-Link |
| <b>Switching mode</b>                      | Light/dark switching  |
| <b>Switching mode selector</b>             | Via IO-Link   |
| <b>Signal voltage PNP HIGH/LOW</b>         | Approx. $V_S - 2.5\text{ V} / 0\text{ V}$   |
| <b>Signal voltage NPN HIGH/LOW</b>         | Approx. $V_S / < 2.5\text{ V}$  |
| <b>Output current <math>I_{max}</math></b> | ≤ 100 mA  |
| <b>Response time</b>                       | ≤ 3 ms <sup>5)</sup>  |
| <b>Switching frequency</b>                 | 170 Hz <sup>6)</sup>  |
| <b>Connection type</b>                     | Cable with M12 male connector, 4-pin, 270 mm <sup>7)</sup>  |
| <b>Cable material</b>                      | Plastic, PVC  |
| <b>Circuit protection</b>                  | A <sup>8)</sup><br>B <sup>9)</sup><br>C <sup>10)</sup><br>D <sup>11)</sup>  |
| <b>Protection class</b>                    | III   |
| <b>Weight</b>                              | 100 g   |
| <b>Housing material</b>                    | Plastic, VISTAL®  |
| <b>Optics material</b>                     | Plastic, PMMA   |

<sup>1)</sup> Limit values.

<sup>2)</sup> 16 V DC ... 30 V DC, without load.

<sup>3)</sup> 10 V DC ... 16 V DC, without load.

<sup>4)</sup> Pin 4 and pin 2: This switching output must not be connected to another output.

<sup>5)</sup> Signal transit time with resistive load in switching mode. Different values possible in COM2 mode.

<sup>6)</sup> With light/dark ratio 1:1 in switching mode. Different values possible in IO-Link mode.

<sup>7)</sup> Do not bend below 0 °C.

<sup>8)</sup> A =  $V_S$  connections reverse-polarity protected.

<sup>9)</sup> B = inputs and output reverse-polarity protected.

<sup>10)</sup> C = interference suppression.

<sup>11)</sup> D = outputs overcurrent and short-circuit protected.

<sup>12)</sup> Avoid condensation on the front screen of the sensor and on the reflector.

<sup>13)</sup> Allowed temperature change after Teach +/- 20 K.

|                                      |   |
|--------------------------------------|---|
| <b>Enclosure rating</b>              | IP66<br>IP67                                    |
| <b>Ambient operating temperature</b> | -40 °C ... +60 °C <sup>12)</sup> <sup>13)</sup> |
| <b>Ambient temperature, storage</b>  | -40 °C ... +75 °C                               |
| <b>UL File No.</b>                   | NRKH.E181493 & NRKH7.E181493                    |

1) Limit values.

2) 16 V DC ... 30 V DC, without load.

3) 10 V DC ... 16 V DC, without load.

4) Pin 4 and pin 2: This switching output must not be connected to another output.

5) Signal transit time with resistive load in switching mode. Different values possible in COM2 mode.

6) With light/dark ratio 1:1 in switching mode. Different values possible in IO-Link mode.

7) Do not bend below 0 °C.

8) A = V<sub>S</sub> connections reverse-polarity protected.

9) B = inputs and output reverse-polarity protected.

10) C = interference suppression.

11) D = outputs overcurrent and short-circuit protected.

12) Avoid condensation on the front screen of the sensor and on the reflector.

13) Allowed temperature change after Teach +/- 20 K.

### Safety-related parameters

|                         |           |
|-------------------------|-----------|
| <b>MTTF<sub>D</sub></b> | 709 years |
| <b>DC<sub>avg</sub></b> | 0 %       |

### Communication interface

|                                       |  |
|---------------------------------------|--|
| <b>Communication interface</b>        | IO-Link V1.1   |
| <b>Communication Interface detail</b> | COM2 (38,4 kBaud)  |
| <b>Cycle time</b>                     | 2.3 ms   |
| <b>Process data length</b>            | 16 Bit   |
| <b>Process data structure</b>         | Bit 0 = switching signal Q <sub>L1</sub><br>Bit 1 = switching signal Q <sub>L2</sub><br>Bit 2 ... 15 = empty |
| <b>VendorID</b>                       | 26   |
| <b>DeviceID HEX</b>                   | 0x800217   |
| <b>DeviceID DEC</b>                   | 8389143  |

### Smart Task

|                        |   |
|------------------------|---|
| <b>Smart Task name</b> | Base logics   |
| <b>Logic function</b>  | Direct<br>AND<br>OR<br>Window<br>Hysteresis   |
| <b>Timer function</b>  | Deactivated<br>Switch-on delay<br>Off delay<br>ON and OFF delay<br>Impulse (one shot) |
| <b>Inverter</b>        | Yes   |

1) SIO Direct: sensor operation in standard I/O mode without IO-Link communication and without using internal sensor logic or time parameters (set to "direct"/"deactivated").

2) SIO Logic: Sensor operation in standard I/O mode without IO-Link communication. Sensor-internal logic or timing parameters plus Automation Functions used.

3) IOL: Sensor operation with full IO-Link communication and usage of logic, timing and Automation Function parameters.

|                                  |  |
|----------------------------------|--|
| <b>Switching frequency</b>       | SIO Direct: 170 Hz <sup>1)</sup><br>SIO Logic: 170 Hz <sup>2)</sup><br>IOL: 170 Hz <sup>3)</sup> |
| <b>Response time</b>             | SIO Direct: 3 ms <sup>1)</sup><br>SIO Logic: 3 ms <sup>2)</sup><br>IOL: 3 ms <sup>3)</sup>       |
| <b>Repeatability</b>             | SIO Direct: 1,5 ms <sup>1)</sup><br>SIO Logic: 1,5 ms <sup>2)</sup><br>IOL: 1,5 ms <sup>3)</sup> |
| <b>Switching signal</b>          |  |
| Switching signal Q <sub>L1</sub> | Switching output   |
| Switching signal Q <sub>L2</sub> | Switching output   |

<sup>1)</sup> SIO Direct: sensor operation in standard I/O mode without IO-Link communication and without using internal sensor logic or time parameters (set to "direct"/"deactivated").

<sup>2)</sup> SIO Logic: Sensor operation in standard I/O mode without IO-Link communication. Sensor-internal logic or timing parameters plus Automation Functions used.

<sup>3)</sup> IOL: Sensor operation with full IO-Link communication and usage of logic, timing and Automation Function parameters.

## Diagnosis

|                         |                            |
|-------------------------|----------------------------|
| <b>Device status</b>    | Yes                        |
| <b>Quality of teach</b> | Yes                        |
| <b>Quality of run</b>   | Yes, Contamination display |

## Certificates


|  |   |
|--|---|
| <b>EU declaration of conformity</b>  | ✓ |
| <b>UK declaration of conformity</b>  | ✓ |
| <b>ACMA declaration of conformity</b>  | ✓ |
| <b>Moroccan declaration of conformity</b>                                    | ✓ |
| <b>China RoHS</b>  | ✓ |
| <b>cULus certificate</b>   | ✓ |
| <b>Photobiological safety (DIN EN 62471) certificate</b>                     | ✓ |
| <b>Information according to Art. 3 of Data Act (Regulation EU 2023/2854)</b> | ✓ |

## Classifications


|                     |          |
|---------------------|----------|
| <b>ECLASS 5.0</b>   | 27270902 |
| <b>ECLASS 5.1.4</b> | 27270902 |
| <b>ECLASS 6.0</b>   | 27270902 |
| <b>ECLASS 6.2</b>   | 27270902 |
| <b>ECLASS 7.0</b>   | 27270902 |
| <b>ECLASS 8.0</b>   | 27270902 |
| <b>ECLASS 8.1</b>   | 27270902 |
| <b>ECLASS 9.0</b>   | 27270902 |
| <b>ECLASS 10.0</b>  | 27270902 |
| <b>ECLASS 11.0</b>  | 27270902 |
| <b>ECLASS 12.0</b>  | 27270902 |

|                |          |
|----------------|----------|
| ETIM 5.0       | EC002717 |
| ETIM 6.0       | EC002717 |
| ETIM 7.0       | EC002717 |
| ETIM 8.0       | EC002717 |
| UNSPSC 16.0901 | 39121528 |


Connection diagram Cd-390



Light spot size

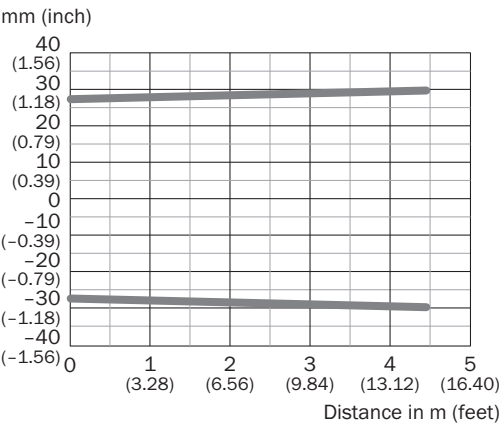

Sensing range diagram Sensing range diagram (MDO 5 mm)

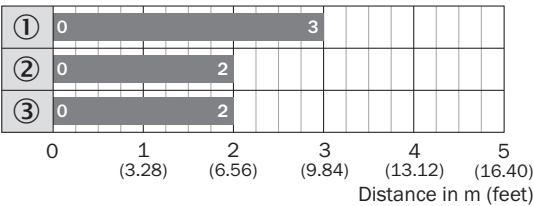

- Sensing range
- ① Reflector PL80A
  - ② Reflector PL81
  - ③ Reflector PL100

| Jump | Distance in m (feet) |
|------|----------------------|
| ①    | 4.5 (15.1)           |
| ②    | 3 (9.8)              |
| ③    | 3 (9.8)              |

- ① Reflector PL80A
- ② Reflector PL81
- ③ Reflector PL100

| Row | Start | End |
|-----|-------|-----|
| ①   | 0     | 2   |
| ②   | 0     | 2   |
| ③   | 0     | 2   |

0      1 (3.28)      2 (6.56)      3 (9.84)      4 (13.12)      5 (16.40)

Distance in m (feet)

- ① Reflector PL80A
- ② Reflector PL81
- ③ Reflector PL100






[illegible]

Dimensions in mm (inch)

- ① Center of optical axis
- ② Mounting hole, Ø 5.2 mm
- ③ Connection
- ④ BluePilot blue: AutoAdapt indicator during run mode
- ⑤ Teach-in button
- ⑥ LED indicator yellow: Status of received light beam
- ⑦ LED indicator green: Supply voltage active

### Recommended accessories

Other models and accessories → [www.sick.com/RAY26\\_Reflex\\_Array](http://www.sick.com/RAY26_Reflex_Array)

|   | Brief description  | Type               | part no. |
|---|--|--------------------|----------|
| reflectors and optics   |  |                    |          |
|    | <ul style="list-style-type: none"> <li><b>Description:</b> Rectangular, screw connection</li> <li><b>Dimensions:</b> 84 mm 84 mm</li> <li><b>Ambient operating temperature:</b> -30 °C ... +65 °C</li> </ul>   | PL80A              | 1003865  |
| Mounting systems  |  |                    |          |
|   | <ul style="list-style-type: none"> <li><b>Description:</b> Mounting bracket</li> <li><b>Material:</b> Steel</li> <li><b>Details:</b> Steel, zinc coated</li> <li><b>Items supplied:</b> Mounting hardware included</li> <li><b>Suitable for:</b> W23-2, W27-3, Reflex Array</li> </ul>   | BEF-WN-W23         | 2019085  |
| connectors and cables   |  |                    |          |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Male connector, M12, 4-pin, straight, A-coded</li> <li><b>Description:</b> Unshielded</li> <li><b>Connection systems:</b> Screw-type terminals</li> <li><b>Permitted cross-section:</b> ≤ 0.75 mm²</li> </ul>  | STE-1204-G         | 6009932  |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 4-pin, straight, A-coded</li> <li><b>Connection type head B:</b> Flying leads</li> <li><b>Signal type:</b> Sensor/actuator cable</li> <li><b>Cable:</b> 5 m, 4-wire, PVC</li> <li><b>Description:</b> Sensor/actuator cable, unshielded</li> <li><b>Application:</b> Uncontaminated zones, Zones with chemicals</li> </ul>  | YF2A14-050VB3XLEAX | 2096235  |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 4-pin, straight, A-coded</li> <li><b>Connection type head B:</b> Flying leads</li> <li><b>Signal type:</b> Sensor/actuator cable</li> <li><b>Cable:</b> 5 m, 4-wire, PUR, halogen-free</li> <li><b>Description:</b> Sensor/actuator cable, unshielded</li> <li><b>Application:</b> Drag chain operation, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul> | YF2A14-050UB3XLEAX | 2095608  |



## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

**For us, that is “Sensor Intelligence.”**

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)