

WLL170-2N192 WLL170

**FIBER-OPTIC SENSORS** 





#### Ordering information

Туре	part no.
WLL170-2N192	6029523

Included in delivery: BEF-WLL170 (1)

Other models and accessories → www.sick.com/WLL170

Illustration may differ



#### Detailed technical data

#### **Features**

Device type	Fiber-optic amplifier
Dimensions (W x H x D)	10.5 mm x 35.5 mm x 83.7 mm
Housing design (light emission)	Rectangular
Sensing range max.	0 mm 1,700 mm (Through-beam system) 1)
Sensing range	0 mm 45 mm, Proximity system <sup>2) 3)</sup> 0 mm 350 mm, Through-beam system <sup>4)</sup>
Focus	Approx. 65° <sup>5)</sup>
Type of light	Visible green light
Light source	LED <sup>6)</sup>
Angle of dispersion	Approx. 65° <sup>5)</sup>
Wave length	520 nm
Adjustment	Potentiometer, 10 turns
Indication	LED

<sup>1)</sup> LL3-TB02 and tip adapter LL3-TA01.

 $<sup>^{2)}</sup>$  Objects to be sensed with 90% reflectivity (based on DIN 5033 white standard). Sensing range depends on fiber-optic cable.

<sup>&</sup>lt;sup>3)</sup> LL3-DK06.

<sup>&</sup>lt;sup>4)</sup> LL3-TB01.

 $<sup>^{5)}</sup>$  See LL3 fiber-optic data.

 $<sup>^{6)}</sup>$  Average service life: 100,000 h at  $T_U$  = +25 °C.

### Mechanics/electronics

Supply voltage U <sub>B</sub>	10 V DC 30 V DC <sup>1)</sup>
Ripple	10 % <sup>2)</sup>
Current consumption	30 mA <sup>3)</sup>
Switching output	NPN
Number of switching outputs	1
Switching mode	Light/dark switching
Switching mode selector	Selectable via light/dark selector
Response time	≤ 250 µs <sup>4)</sup>
Switching frequency	2,000 Hz <sup>5)</sup>
Time functions	Off delay
Delay time	Selectable by sliding switch, ≤ 40 ms
Input	-
Connection type	Cable, 3-wire, 2 m <sup>6)</sup>
Cable material	Plastic, PVC
Conductor cross section	0.2 mm <sup>2</sup>
Cable diameter	Ø 3.8 mm
Circuit protection	A <sup>7)</sup> B <sup>8)</sup> C <sup>9)</sup> D <sup>10)</sup>
Protection class	III
Weight	70 g
Housing material	Plastic, ABS/PC
Enclosure rating	IP66 <sup>11)</sup>
Items supplied	BEF-WLL170 mounting bracket
Ambient operating temperature	-25 °C +55 °C
Ambient temperature, storage	-40 °C +70 °C
UL File No.	NRKH.E300503 & NRKH7.E300503

<sup>1)</sup> Limit values.

#### Certificates

EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓

 $<sup>^{2)}\,\</sup>mbox{May}$  not fall below or exceed  $\mbox{U}_{\mbox{\scriptsize V}}$  tolerances.

<sup>3)</sup> Without load.

 $<sup>^{4)}</sup>$  Signal transit time with resistive load.

<sup>&</sup>lt;sup>5)</sup> With light/dark ratio 1:1.

<sup>&</sup>lt;sup>6)</sup> Do not bend below 0 °C.

 $<sup>^{7)}</sup>$  A = V<sub>S</sub> connections reverse-polarity protected.

<sup>8)</sup> B = inputs and output reverse-polarity protected.

<sup>9)</sup> C = interference suppression.

<sup>10)</sup> D = outputs overcurrent and short-circuit protected.

<sup>11)</sup> With correctly attached fibre-optic cable LL3 and closed protection hood.

# WLL170-2N192 | WLL170

#### FIBER-OPTIC SENSORS

China RoHS	✓
cULus certificate	✓
Photobiological safety (DIN EN 62471) certificate	✓

#### Classifications

ECLASS 5.0	27270905
ECLASS 5.1.4	27270905
ECLASS 6.0	27270905
ECLASS 6.2	27270905
ECLASS 7.0	27270905
ECLASS 8.0	27270905
ECLASS 8.1	27270905
ECLASS 9.0	27270905
ECLASS 10.0	27270905
ECLASS 11.0	27270905
ECLASS 12.0	27270905
ETIM 5.0	EC002651
ETIM 6.0	EC002651
ETIM 7.0	EC002651
ETIM 8.0	EC002651
UNSPSC 16.0901	39121528

#### Adjustments WLL170-2




- (6) indicating pin correctly inserted LL3 fiber
- ① LED indicator orange, lights up when switching output is active
- (a) LED signal strength indicator green, lights up, when light received < 0.9 or >1.1 (switching threshold = 1)
- Sensitivity scale 270°
- ® Sensitivity control (10 revolutions)
- ① OFF delay selector switch: "OFF DLY" (on)/"OFF" (off), 40 ms fixed
- @ Selector switch: "L.ON" ( light switching) / "D.ON" ( dark switching)


#### Connection type



#### Connection diagram Cd-043



#### Dimensional drawing WLL170-2

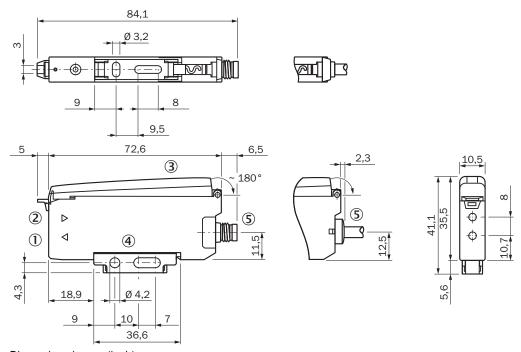

Dimensions in mm (inch)

- ① Sender LED, installation of LL3 fibre-optic cable (sender fibre)
- ② Receiver, installation of LL3 fibre optic cable (receiver fibre)
- 3 Protective hood, can be raised at both ends
- Mounting bracket, included with delivery
- ⑤ Connection

# WLL170-2N192 | WLL170

# FIBER-OPTIC SENSORS

# Recommended accessories Other models and accessories → www.sick.com/WLL170

	Brief description	Туре	part no.	
Mounting systems				
	<ul> <li>Description: Mounting bracket</li> <li>Material: Steel</li> <li>Details: Steel, zinc coated</li> <li>Items supplied: Without mounting hardware</li> <li>Suitable for: WLL170-2, WLL190-2</li> </ul>	BEF-WLL170	5306574	
	<ul> <li>Description: Rail end piece for block mounting</li> <li>Material: Stainless steel</li> <li>Details: Stainless steel</li> <li>Items supplied: Mounting hardware included</li> </ul>	BEF-EB01-W190	5313011	

# SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

# **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

