

# WLL180T-F333

WLL180

**FIBER-OPTIC SENSORS** 





### Ordering information

Туре	part no.
WLL180T-F333	6042429

Included in delivery: BEF-WLL180 (1)

Other models and accessories → www.sick.com/WLL180





#### Detailed technical data

#### **Features**

Device type	Fiber-optic amplifier
Device type detail	Expansion unit
Functional principle detail	Depending on the optical fiber cable used
Sensing range max.	Depending on the optical fiber cable used
Emitted beam	
Light source	LED
Type of light	Visible red light
Key LED figures	
Normative reference	EN 62471:2008-09   IEC 62471:2006, modified
LED risk group marking	Free group
Wave length	650 nm
Average service life	100,000 h at $T_a = +25  ^{\circ}\text{C}$
Adjustment	
Display + operating buttons	For configuring the sensor parameters
Display	
LED yellow	Status of digital output Permanently on: Switching output active Permanently off: Digital output not active
Display	Display of sensor functions
Items supplied	BEF-WLL180 mounting bracket

## Safety-related parameters

MTTF <sub>D</sub>	317 years
DC <sub>avg</sub>	0 %
T <sub>M</sub> (mission time)	20 years

#### Electronics

Supply voltage $\mathbf{U}_{\mathrm{B}}$	12 V DC 24 V DC <sup>1)</sup>
Ripple	≤ 10 % <sup>2)</sup>
Current consumption	$\leq$ 50 mA $^{3)}$
Protection class	III
Digital output	
Number	1
Туре	PNP <sup>4)</sup>
Switching mode	Light/dark switching
Switching mode selector	Manually selectable
Circuit protection outputs	Reverse polarity protected
	Overcurrent protected
	Short-circuit protected
Response time	≤ 16 µs
	≤ 70 µs
	≤ 250 µs
	≤ 2,000 µs
	≤ 8,000 µs
Switching frequency	31.2 kHz
	7.1 kHz
	2 kHz
	250 Hz
	62.5 Hz
Time functions	Without time delay, off delay, switch-on delay, ON and OFF delay, one shot
Delay time	Programmable, 0 ms 9,999 ms
Pin/Wire assignment	
Function of pin 4/black (BK)	Digital output, received light → Output Q1 HIGH
Function of pin 4/black (BK) - detail	The pin 4 function of the sensor can be configured

<sup>&</sup>lt;sup>1)</sup> +- 10%.

#### Mechanics

Housing	Rectangular
Dimensions (W x H x D)	10.5 mm x 34.6 mm x 71.9 mm
Connection	Connector M8, 3-pin
Material	
Housing	Plastic, ABS/PC

#### Ambient data

Enclosure rating	IP50 (EN 60529)
------------------	-----------------

<sup>1)</sup> Operating temperature fluctuates according to number of devices connected: 4–8 devices: -25 °C ... +50 °C (output current 50 mA) / 9–16 devices: -25 °C ... +45 °C (output current 20 mA).

 $<sup>^{2)}\,\</sup>mbox{May}$  not fall below or exceed  $\mbox{U}_{\mbox{\scriptsize V}}$  tolerances.

<sup>3)</sup> Without load.

<sup>&</sup>lt;sup>4)</sup> Selectable via menu.

Ambient operating temperature	-25 °C +55 °C <sup>1)</sup>
Ambient temperature, storage	-40 °C +70 °C
Typ. Ambient light immunity	Artificial light: ≤ 3,000 lx Sunlight: ≤ 10,000 lx
Shock resistance	50 g, $11$ ms (3 positive and 3 negative shocks along X, Y, Z axes, $18$ total shocks (EN60068-2-27))
Vibration resistance	10 Hz 55 Hz (Amplitude 1 mm, 3 x 30 min (EN60068-2-6))
Air humidity	35 % 85 %, relative humidity (no condensation)
Electromagnetic compatibility (EMC)	EN 60947-5-2
UL File No.	NRKH2.E300503 & NRKH8.E300503
RoHS certificate	<b>√</b>

 $<sup>^{1)}</sup>$  Operating temperature fluctuates according to number of devices connected: 4–8 devices: -25 °C ... +50 °C (output current 50 mA) / 9–16 devices: -25 °C ... +45 °C (output current 20 mA).

#### **Smart Task**

Timer function	Deactivated Switch-on delay Off delay
	ON and OFF delay
	Impulse (one shot) Switch-on delay and pulse

#### Certificates


EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
Moroccan declaration of conformity	✓
China RoHS	✓
Photobiological safety (DIN EN 62471) certificate	✓
Information according to Art. 3 of Data Act (Regulation EU 2023/2854)	✓

#### Classifications

ECLASS 5.0	27270905
ECLASS 5.1.4	27270905
ECLASS 6.0	27270905
ECLASS 6.2	27270905
ECLASS 7.0	27270905
ECLASS 8.0	27270905
ECLASS 8.1	27270905
ECLASS 9.0	27270905
ECLASS 10.0	27270905
ECLASS 11.0	27270905
ECLASS 12.0	27270905
ETIM 5.0	EC002651
ETIM 6.0	EC002651


ETIM 7.0	EC002651
ETIM 8.0	EC002651
UNSPSC 16.0901	39121528

#### Adjustments WLL180




- 3 Locking the fiber-optic cables
- 7 LED indicator orange, lights up when switching output is active
- ® Numeric display 2 x 4-digit; green: switching threshold, operating mode; red: actual value, Teach-in and function parameter
- step pushbutton > (manual switching threshold: higher/next function parameter)
- step pushbutton < (manual switching threshold: lower/previous function parameter)
  </p>
- 1 Mode/Enter-button
- 1 Teach-in button

#### Connection diagram Cd-362



#### Dimensional drawing Expansion unit

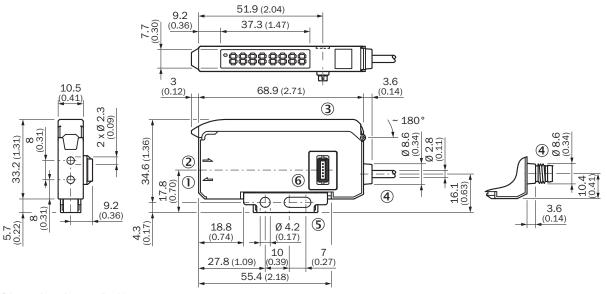

Dimensions in mm (inch)

① Sender LED, installation of LL3 fibre-optic cable (sender fibre)

# WLL180T-F333 | WLL180

## FIBER-OPTIC SENSORS

- ② Receiver, installation of LL3 fibre optic cable (receiver fibre)
- 3 protective hood opens approx. 180°
- 4 Connection
- (5) Mounting bracket, included with delivery
- 6 bus connector

#### Recommended accessories

Other models and accessories → www.sick.com/WLL180

	Brief description	Туре	part no.	
fiber-optic ser	iber-optic sensors			
	For fiber optic amplifiers: GLL70, WLL80, WLL180, GLL170(T), WLL24 Ex, KTL180 Functional principle: Proximity system Fiber length: 2,000 mm Thread diameter (housing): M6 Fiber material: Plastic Jacket material: Plastic Fiber head material: Stainless steel Included with delivery: Mounting, 2 x M6 hexagon nut, 2 x washer, FC fiber cutter (5304141)	LL3-DB01	5308074	
	For fiber optic amplifiers: GLL70, WLL80, WLL180, GLL170(T) Functional principle: Proximity system Fiber length: 2,000 mm Thread diameter (housing): M3 Fiber material: Plastic Jacket material: Plastic Fiber head material: Stainless steel Included with delivery: Mounting, 2 x M3 hexagon nut, 2 x washer, adapter sleeves, BF-WLL160-13 (1.3 mm) adapter sleeves, FC fiber cutter (5304141)	LL3-DT01	5308076	
	For fiber optic amplifiers: GLL70, WLL80, WLL180, GLL170(T) Functional principle: Proximity system Fiber length: 2,000 mm Smooth sleeve diameter: 3 mm Fiber material: Plastic Jacket material: Plastic Fiber head material: Stainless steel Included with delivery: Adapter sleeves, 1 x BF-WLL160-10 (1.0 mm) adapter sleeve, 1 x BF-WLL160-13 (1.3 mm) adapter sleeve, FC fiber cutter (5304141)	LL3-DR11	5326000	
	<ul> <li>For fiber optic amplifiers: GLL70, WLL80, WLL180, GLL170(T), WLL24 Ex</li> <li>Functional principle: Proximity system</li> <li>Fiber length: 2,000 mm</li> <li>Thread diameter (housing): M6</li> <li>Fiber material: Plastic</li> <li>Jacket material: Plastic</li> <li>Fiber head material: Plastic</li> <li>Included with delivery: Mounting, 1 x M6 hexagon nut, FC fiber cutter (5304141)</li> </ul>	LL3-DV05	5322549	
**	For fiber optic amplifiers: GLL70, WLL80, WLL180, GLL170(T), WLL24 Ex Functional principle: Proximity system Fiber length: 2,000 mm Thread diameter (housing): M6 Fiber material: Plastic Jacket material: Plastic Fiber head material: Stainless steel Included with delivery: Mounting, 2 x M6 hexagon nut, 2 x washer, FC fiber cutter (5304141)	LL3-DB02	5308083	
	<ul> <li>For fiber optic amplifiers: GLL70, WLL80, WLL180, GLL170(T), WLL24 Ex, KTL180</li> <li>Functional principle: Proximity system</li> <li>Fiber length: 2,000 mm</li> <li>Fiber material: Plastic</li> <li>Jacket material: Plastic</li> <li>Fiber head material: Plastic</li> <li>Included with delivery: Adapter sleeves, BF-WLL160-10 (1.0 mm) adapter sleeves, FC fiber cutter (5304141)</li> </ul>	LL3-DC38	5322472	
namanan e	<ul> <li>For fiber optic amplifiers: GLL70, WLL80, WLL180, GLL170(T), WLL24 Ex</li> <li>Functional principle: Through-beam system</li> <li>Fiber length: 2,000 mm</li> <li>Thread diameter (housing): M4</li> <li>Fiber material: Plastic</li> <li>Jacket material: Plastic</li> <li>Fiber head material: Stainless steel</li> <li>Included with delivery: Mounting, 4 x M4 hexagon nut, 4 x washer, FC fiber cutter (5304141)</li> </ul>	LL3-TB01	5308050	
	<ul> <li>For fiber optic amplifiers: GLL70, WLL80, WLL180, GLL170(T), WLL24 Ex</li> <li>Functional principle: Through-beam system</li> <li>Fiber length: 20,000 mm</li> <li>Thread diameter (housing): M12</li> <li>Fiber material: Plastic</li> <li>Jacket material: Plastic</li> <li>Fiber head material: Stainless steel</li> </ul>	LL3-TX01	5324173	

	Brief description	Туре	part no.		
	$ \hbox{\bf Included with delivery:} \ \hbox{Mounting, 4 x M12 hexagon nut, FC fiber cutter (5304141), protective cladding for fiber head } $				
Canana _	<ul> <li>For fiber optic amplifiers: GLL70, WLL80, WLL180, GLL170(T), WLL24 Ex</li> <li>Functional principle: Through-beam system</li> <li>Fiber length: 2,000 mm</li> <li>Thread diameter (housing): M4</li> <li>Fiber material: Plastic</li> <li>Jacket material: Plastic</li> <li>Fiber head material: Plastic</li> <li>Included with delivery: Mounting, 2 x M4 hexagon nut, FC fiber cutter (5304141)</li> </ul>	LL3-TV05	5322546		
	<ul> <li>For fiber optic amplifiers: GLL70, WLL80, WLL180, GLL170(T), WLL24 Ex</li> <li>Functional principle: Through-beam system</li> <li>Fiber length: 2,000 mm</li> <li>Fiber-optic head array width: 40 mm</li> <li>Fiber material: Plastic</li> <li>Jacket material: Plastic</li> <li>Fiber head material: Plastic</li> <li>Included with delivery: Mounting, 4 x M3 Phillips-head screw, FC fiber cutter (5304141), protective cladding for fiber head</li> </ul>	LL3-TS40	5323971		
	<ul> <li>For fiber optic amplifiers: GLL70, WLL80, WLL180, GLL170(T), WLL24 Ex</li> <li>Functional principle: Through-beam system</li> <li>Fiber length: 2,000 mm</li> <li>Smooth sleeve diameter: 6 mm</li> <li>Fiber material: Plastic</li> <li>Jacket material: Chemical-resistant plastic</li> <li>Fiber head material: Chemical-resistant plastic</li> <li>Included with delivery: FC fiber cutter (5304141)</li> </ul>	LL3-TY01	5308066		
integration modules and adapters					
	Description: PROFINET coupler for WLL180T, KTL180 and AOD1. Features: PROFINET IRT; transmission rates 10 Mbaud – 100 Mbaud; M12 PROFINET connection; M8 voltage supply connection, 4-pin; full read/write functionality for the process and service data of the connected sensors. See operating instructions for additional information and technical details	WI180C-PN	6068088		
	Description: EtherCAT coupler for WLL180T, KTL180 and AOD1. Features: EtherCAT; transmission rates of up to 100 Mbaud; M12 EtherCAT connection; M8 voltage supply connection, 4-pin; full read/write functionality for the process and service data of the connected sensors. See operating instructions for additional information and technical details	WI180C-EC	6068089		
The state of the s	Description: IO-Link Smart Sensor Gateway for WLL180T, KTL180 and AOD1; Features: IO-Link; COM3; M8 connection, 4-pin; full read/write functionality for the process and service data of the connected sensors. See operating instructions for additional information and technical details	WI180C-IOA00	6071650		

	Brief description	Туре	part no.
connectors	s and cables		
	<ul> <li>Connection type head A: Female connector, M8, 3-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 2 m, 3-wire, PVC</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Zones with chemicals, Uncontaminated zones</li> </ul>	YF8U13-020VA1XLEAX	2095860
	<ul> <li>Connection type head A: Female connector, M8, 3-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 5 m, 3-wire, PVC</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Zones with chemicals, Uncontaminated zones</li> </ul>	YF8U13-050VA1XLEAX	2095884
	<ul> <li>Connection type head A: Female connector, M8, 3-pin, angled, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 2 m, 3-wire, PVC</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Zones with chemicals, Uncontaminated zones</li> </ul>	YG8U13-020VA1XLEAX	2096165
	<ul> <li>Connection type head A: Female connector, M8, 3-pin, angled, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 5 m, 3-wire, PVC</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Zones with chemicals, Uncontaminated zones</li> </ul>	YG8U13-050VA1XLEAX	2096166
-	Connection type head A: Female connector, M8, 3-pin, straight, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 0.6 m, 3-wire, PVC Description: Sensor/actuator cable, unshielded Application: Zones with chemicals, Uncontaminated zones	YF8U13- C60VA1XLEAX	2146368

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

# **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

