



# WLL80I-1HT6Y4DZA71Z1Z1

## WLL80

FIBER-OPTIC SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ



Ordering information

Type	part no.
WLL80I-1HT6Y4DZA71Z1Z1	6083349

Included in delivery: BEF-WLL180 (1)  
Other models and accessories → [www.sick.com/WLL80](http://www.sick.com/WLL80)

Detailed technical data

Features

Device type		Fiber-optic amplifier
Device type detail		Stand-alone
Functional principle detail		Depending on the optical fiber cable used
Sensing range max.		Depending on the optical fiber cable used
Emitted beam	Light source	LED
	Type of light	Infrared light
Key LED figures		
	Normative reference	EN 62471:2008-09   IEC 62471:2006, modified
	LED risk group marking	Free group
	Wave length	1,450 nm
	Average service life	100,000 h at T <sub>a</sub> = +25 °C
Adjustment		
	IO-Link	For configuring the sensor parameters and Smart Task functions
	Wire/pin	For deactivating the sender and executing the test logic/for setting the sensing range/for resetting the counter
	Display + operating buttons	For configuring the sensor parameters
Display		
	LED green	Operating indicator Static on: power on Flashing: IO-Link mode
	LED yellow 1	Status of received light beam Static on: object present

	LED yellow 2	Static off: object not present Flashing: Executing teach-in/teach-in error
		Status of received light beam Static on: object present Static off: object not present Flashing: Executing teach-in/teach-in error
	Display	Display of sensor functions Menu languages: German, English, Chinese, Korean, Japanese
Items supplied		BEF-WLL180 mounting bracket

## Safety-related parameters

MTTF <sub>D</sub>	390.5 years
DC <sub>avg</sub>	0%
T <sub>M</sub> (mission time)	20 years

## Communication interface

IO-Link		✓, IO-Link V1.1
	Data transmission rate	COM3 (230.4 kbit/s)
	Cycle time	0.5 ms
	Process data length	32 Bit
	Process data structure	Bit 0 = switching signal Q <sub>L1</sub>
		Bit 1 = switching signal Q <sub>L2</sub>
		Bit 2 = detection signal Q <sub>int.1</sub>
		Bit 3 = detection signal Q <sub>int.2</sub>
		Bit 16 ... 31 = Current receiver level (live)
	Compatible master port type	A
	SIO mode support	Yes

## Electronics

Supply voltage U <sub>B</sub>		12 V DC ... 30 V DC <sup>1) 2)</sup>
Ripple		± 10 % <sup>3)</sup>
Current consumption		≤ 50 mA <sup>4)</sup>
Protection class		III
Digital output		
	Number	2 (individually adjustable)
	Type	Push-pull: PNP/NPN <sup>5)</sup>
		PNP
		NPN: open collector
	Switching mode	Light/dark switching
	Signal voltage PNP HIGH/LOW	Approx. U <sub>B</sub> -2.5 V / 0 V
	Signal voltage NPN HIGH/LOW	Approx. U <sub>B</sub> / < 2.5 V

<sup>1)</sup> Limit values.

<sup>2)</sup> IO-Link mode: 18 VDC ... 30 VDC.

<sup>3)</sup> May not fall below or exceed U<sub>y</sub> tolerances.

<sup>4)</sup> Without load.

<sup>5)</sup> Selectable via menu.

<sup>6)</sup> With light/dark ratio 1:1.

Output current $I_{\max.}$	$\leq 100 \text{ mA}$
Circuit protection outputs	Reverse polarity protected
	Overcurrent protected
	Short-circuit protected
Response time	$\leq 16 \text{ } \mu\text{s}$
	$\leq 70 \text{ } \mu\text{s}$
	$\leq 250 \text{ } \mu\text{s}$
	$\leq 500 \text{ } \mu\text{s}$
	$\leq 1,000 \text{ } \mu\text{s}$
	$\leq 2,000 \text{ } \mu\text{s}$
	$\leq 8,000 \text{ } \mu\text{s}$
Switching frequency	31.2 kHz <sup>6)</sup>
	7.1 kHz
	2 kHz
	1 kHz
	500 Hz
	250 Hz
	62.5 Hz
Time functions	Switch-on delay, off delay, ON and OFF delay, Impulse (one shot), Switch-on delay and pulse, deactivated
Delay time	Adjustment via operating buttons / via IO-Link, 0 ms ... 30,000 ms
<b>Pin/Wire assignment</b>	
Function of pin 4/black (BK)	Digital output, object present → Output $Q_{L1}$ HIGH
	IO-Link communication C
Function of pin 4/black (BK) – detail	The pin 4 function of the sensor can be configured
	Additional possible settings via IO-Link
Function of pin 2/white (WH)	Digital output, object present → Output $Q_{L2}$ HIGH
Function of pin 2/white (WH) – detail	The pin 2 function of the sensor can be configured
	Additional possible settings via IO-Link

<sup>1)</sup> Limit values.

<sup>2)</sup> IO-Link mode: 18 VDC ... 30 VDC.

<sup>3)</sup> May not fall below or exceed  $U_Y$  tolerances.

<sup>4)</sup> Without load.

<sup>5)</sup> Selectable via menu.

<sup>6)</sup> With light/dark ratio 1:1.

## Mechanics

<b>Housing</b>	Rectangular
<b>Dimensions (W x H x D)</b>	10.5 mm x 33.2 mm x 79.9 mm
<b>Connection</b>	Cable, 4-wire, 2 m
<b>Connection detail</b>	
Deep-freeze property	Do not bend below 0 °C
Conductor size	0.18 mm <sup>2</sup>
Cable diameter	Ø 4 mm

	Length of cable (L)	2 m
<b>Material</b>		
	Housing	Plastic, PC
	Protection hood	Plastic, PC
	Operating buttons	Plastic, Rubber
	Cable	Plastic, PVC
<b>Weight</b>		Approx. 75 g

## Ambient data

<b>Enclosure rating</b>	IP54 (EN 60529)
<b>Ambient operating temperature</b>	-25 °C ... +55 °C
<b>Ambient temperature, storage</b>	-40 °C ... +70 °C
<b>Typ. Ambient light immunity</b>	Artificial light: ≤ 16,000 lx Sunlight: ≤ 67,000 lx
<b>Shock resistance</b>	50 g, 11 ms (3 positive and 3 negative shocks along X, Y, Z axes, 18 total shocks (EN60068-2-27))
<b>Vibration resistance</b>	10 Hz ... 55 Hz (Amplitude 1 mm, 3 x 30 min (EN60068-2-6))
<b>Air humidity</b>	35 % ... 85 %, relative humidity (no condensation)
<b>Electromagnetic compatibility (EMC)</b>	EN 60947-5-2

## Smart Task

<b>Smart Task name</b>	Counter + debouncing
<b>Logic function</b>	Direct WINDOW Hysteresis
<b>Timer function</b>	Deactivated Switch-on delay Off delay ON and OFF delay Impulse (one shot) Switch-on delay and pulse
<b>Inverter</b>	Yes
<b>Switching signal</b>	
	Switching signal Q <sub>L1</sub> Switching output
	Switching signal Q <sub>L2</sub> Switching output

## Diagnosis

<b>Quality of run</b>	Yes
-----------------------	-----

## Certificates


<b>EU declaration of conformity</b>	✓
<b>UK declaration of conformity</b>	✓
<b>ACMA declaration of conformity</b>	✓
<b>Moroccan declaration of conformity</b>	✓
<b>China RoHS</b>	✓
<b>cULus certificate</b>	✓
<b>IO-Link certificate</b>	✓
<b>Photobiological safety (DIN EN 62471) certificate</b>	✓

Information according to Art. 3 of Data Act (Regulation EU 2023/2854)	✓
--	---

Classifications


ECLASS 5.0	27270905
ECLASS 5.1.4	27270905
ECLASS 6.0	27270905
ECLASS 6.2	27270905
ECLASS 7.0	27270905
ECLASS 8.0	27270905
ECLASS 8.1	27270905
ECLASS 9.0	27270905
ECLASS 10.0	27270905
ECLASS 11.0	27270905
ECLASS 12.0	27270905
ETIM 5.0	EC002651
ETIM 6.0	EC002651
ETIM 7.0	EC002651
ETIM 8.0	EC002651
UNSPSC 16.0901	39121528

display and adjustment elements

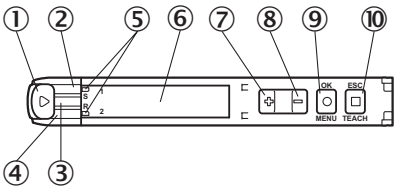


- ① Fiber optic interlock
- ② LED yellow 1
- ③ LED green
- ④ LED yellow 2
- ⑤ Indicator for correctly inserted fibers
- ⑥ Display
- ⑦ (+) button
- ⑧ (-) pushbutton
- ⑨ Menu/OK pushbutton
- ⑩ Teach-in/escape pushbutton


Connection type Cable, 4-wire



## Connection diagram Cd-530



## Dimensional drawing

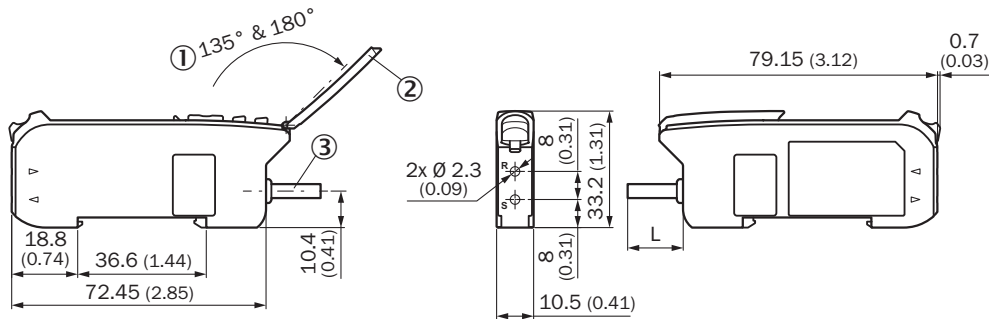

Dimensions in mm (inch)

- ① aperture angle  
② Hinged cover for the pushbuttons  
③ Connection

## Recommended accessories

Other models and accessories → [www.sick.com/WLL80](http://www.sick.com/WLL80)

	Brief description	Type	part no.
fiber-optic sensors			
	<ul style="list-style-type: none"> <li>For fiber optic amplifiers: GLL70, WLL80, WLL180, GLL170(T)</li> <li>Functional principle: Through-beam system</li> <li>Fiber length: 1,000 mm</li> <li>Thread diameter (housing): M4</li> <li>Fiber material: Glass</li> <li>Jacket material: Stainless steel</li> <li>Fiber head material: Stainless steel</li> <li>Included with delivery: Mounting, 4 x M4 hexagon nut, 2 x washer</li> </ul>	LL3-TW01	5315233
	<ul style="list-style-type: none"> <li>For fiber optic amplifiers: GLL70, WLL80, WLL180, GLL170(T)</li> <li>Functional principle: Proximity system</li> <li>Fiber length: 1,000 mm</li> <li>Thread diameter (housing): M6</li> <li>Fiber material: Glass</li> <li>Jacket material: Stainless steel</li> <li>Fiber head material: Stainless steel</li> <li>Included with delivery: Mounting, 2 x M6 hexagon nut, 1 x washer</li> </ul>	LL3-DW01	5315234
	<ul style="list-style-type: none"> <li>For fiber optic amplifiers: GLL70, WLL80, WLL180, GLL170(T)</li> <li>Functional principle: Through-beam system</li> <li>Fiber length: 2,000 mm</li> <li>Thread diameter (housing): M4</li> <li>Fiber material: Glass</li> <li>Jacket material: Stainless steel</li> <li>Fiber head material: Brass</li> </ul>	LL3-TH08	5325978

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

**For us, that is “Sensor Intelligence.”**

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)