



## M40S-043003AAO, M40E-043003RBO

M4000 Advanced

**MULTIPLE LIGHT BEAM SAFETY DEVICES** 





### Ordering information

System part	Туре	Part no.
Sender	M40S-043003AA0	1200073
Receiver	M40E-043003RB0	1200100

Other models and accessories → www.sick.com/M4000\_Advanced

Illustration may differ



### Detailed technical data

### **Features**

Scanning range	0.5 m 70 m, configurable
Low scanning range	0.5 m 20 m
Great scanning range	9 m 70 m
Number of beams	4
Beam separation	300 mm
Response time	10 ms
Synchronization	Optical synchronisation

### Safety-related parameters

Туре	Type 4 (IEC 61496-1)
Safety integrity level	SIL3 (IEC 61508) SILCL3 (EN 62061)
Category	Category 4 (EN ISO 13849)
Performance level	PL e (EN ISO 13849)
$\ensuremath{PFH_D}$ (mean probability of a dangerous failure per hour)	6.6 x 10 <sup>-9</sup> (EN ISO 13849)
T <sub>M</sub> (mission time)	20 years (EN ISO 13849)
Safe state in the event of a fault	At least one OSSD is in the OFF state.

### **Functions**

	Functions	Delivery status
Beam coding	✓	Uncoded
Restart interlock	✓	Internal
External device monitoring (EDM)	✓	Activated
Sender test	✓	Deactivated
Configurable scanning range	✓	0.5 m 20 m
Configurable application diagnostic output	✓	Contamination (OWS)
Safe SICK device communication via EFI	✓	

	Functions	Delivery status
Differentiation between man and material (muting)	✓	

#### Interfaces

System connection	Hirschmann male connector M26, 12-pin
Permitted cable length	50 m <sup>1)</sup>
Permitted cross-section	≥ 0.75 mm²
Extension connection	Female connector M12, 5-pin
Configuration connection	Female connector M8, 4-pin
Configuration method	PC with CDS (Configuration and Diagnostic Software)
Display elements	LEDs 7-segment display
Fieldbus, industrial network	
Integration via Flexi Soft safety controller	CANopen <sup>2)</sup> DeviceNet™ EtherCAT® EtherNet/IP™ Modbus TCP PROFIBUS DP PROFINET

 $<sup>^{1)}</sup>$  Depending on load, power supply and wire cross-section. The technical specifications must be observed.

### Electrical data

Protection class	III (IEC 61140)
Supply voltage V <sub>S</sub>	24 V DC (19.2 V DC 28.8 V DC) <sup>1)</sup>
Residual ripple	≤ 10 % <sup>2)</sup>
Power consumption	0.2 A: 0.6 A (depending on type)
Output signal switching devices (OSSDs)	2 PNP semiconductors, short-circuit protected, cross-circuit monitored <sup>3)</sup>
ON state, switching voltage HIGH	24 V DC (V <sub>S</sub> - 2.25 V DC V <sub>S</sub> )
OFF state, switching voltage LOW	≤ 2 V DC
Current-carrying capacity per OSSD	≤ 500 mA

<sup>1)</sup> The external voltage supply must be capable of buffering brief mains voltage failures of 20 ms as specified in EN 60204-1. Suitable power supplies are available as accessories from SICK.

### Mechanical data

Dimensions	See dimensional drawing
Housing cross-section	52 mm x 55.5 mm
Material	
Housing	Aluminum alloy ALMGSI 0.5, powder coated
Front screen	Polycarbonate, scratch-resistant coating

### Ambient data

Enclosure rating	IP65 (EN 60529)
Ambient operating temperature	-30 °C +55 °C

<sup>&</sup>lt;sup>2)</sup> For additional information on Flexi Soft -> www.sick.com/Flexi\_Soft.

 $<sup>^{2)}</sup>$  Within the limits of V<sub>S</sub>.

 $<sup>^{3)}</sup>$  Applies to the voltage range between  $-30\ V$  and  $+30\ V.$ 

# M40S-043003AA0, M40E-043003RB0 | M4000 Advanced MULTIPLE LIGHT BEAM SAFETY DEVICES

Storage temperature	-30 °C +70 °C
Air humidity	15 % 95 %, Non-condensing
Shock resistance	10 g, 16 ms (IEC 60068-2-29)


### Other information

Wave length 950 nm	
--------------------	--

### Classifications

ECI@ss 5.1.4       27272703         ECI@ss 6.0       27272703         ECI@ss 6.2       27272703         ECI@ss 7.0       27272703         ECI@ss 8.0       27272703         ECI@ss 8.1       27272703         ECI@ss 9.0       27272703         ECI@ss 10.0       27272703         ECI@ss 11.0       27272703         ETIM 5.0       EC001832		
ECI@ss 6.0       27272703         ECI@ss 6.2       27272703         ECI@ss 7.0       27272703         ECI@ss 8.0       27272703         ECI@ss 8.1       27272703         ECI@ss 9.0       27272703         ECI@ss 10.0       27272703         ECI@ss 11.0       27272703         ETIM 5.0       EC001832	ECI@ss 5.0	27272703
ECI@ss 6.2 27272703 ECI@ss 7.0 27272703 ECI@ss 8.0 27272703 ECI@ss 8.1 27272703 ECI@ss 9.0 27272703 ECI@ss 10.0 27272703 ECI@ss 11.0 27272703 ETIM 5.0 ECO01832	ECI@ss 5.1.4	27272703
ECI@ss 7.0       27272703         ECI@ss 8.0       27272703         ECI@ss 8.1       27272703         ECI@ss 9.0       27272703         ECI@ss 10.0       27272703         ECI@ss 11.0       27272703         ETIM 5.0       EC001832	ECI@ss 6.0	27272703
ECI@ss 8.0       27272703         ECI@ss 8.1       27272703         ECI@ss 9.0       27272703         ECI@ss 10.0       27272703         ECI@ss 11.0       27272703         ETIM 5.0       EC001832	ECI@ss 6.2	27272703
ECI@ss 8.1 27272703  ECI@ss 9.0 27272703  ECI@ss 10.0 27272703  ECI@ss 11.0 27272703  ETIM 5.0 EC001832	ECI@ss 7.0	27272703
ECI@ss 9.0 27272703 ECI@ss 10.0 27272703 ECI@ss 11.0 27272703 ETIM 5.0 EC001832	ECI@ss 8.0	27272703
ECI@ss 10.0       27272703         ECI@ss 11.0       27272703         ETIM 5.0       EC001832	ECI@ss 8.1	27272703
ECI@ss 11.0 27272703 ETIM 5.0 EC001832	ECI@ss 9.0	27272703
ETIM 5.0 EC001832	ECI@ss 10.0	27272703
	ECI@ss 11.0	27272703
ETIM 6 0 F0001832	ETIM 5.0	EC001832
E1114 6.0	ETIM 6.0	EC001832
<b>ETIM 7.0</b> EC001832	ETIM 7.0	EC001832
<b>ETIM 8.0</b> EC001832	ETIM 8.0	EC001832
<b>UNSPSC 16.0901</b> 46171620	UNSPSC 16.0901	46171620

### Dimensional drawing (Dimensions in mm (inch))

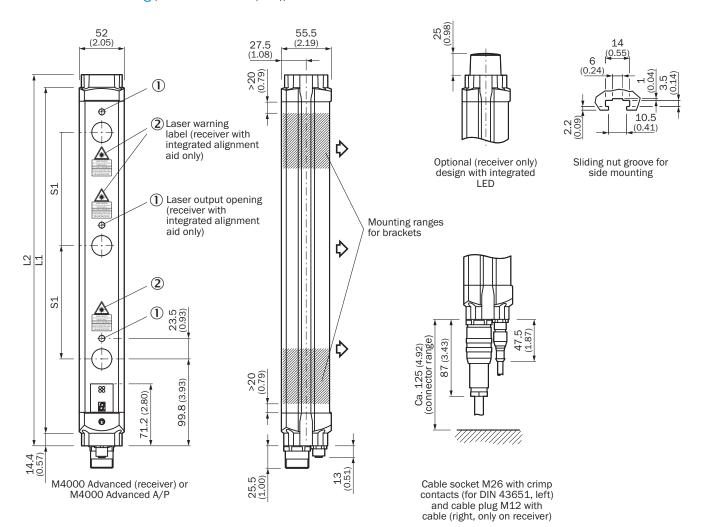

#### Illustration sender (receiver mirror image)

Number of beams	Beam separation S1	L1	L2
2	500 (19.69)	643 (25.31)	672 (26.46)
	600 (23.62)	743 (29.25)	772 (30.39)
3	220 (8.66)	583 (22.95)	612 (24.09)
	400 (15.75)	943 (37.13)	972 (38.27)
	450 (17.72)	1,043 (41.06)	1,072 (42.20)
4	220 (8.66)	803 (31.61)	832 (32.76)
	300 (11.81)	1,043 (41.06)	1,072 (42.20)
5	220 (8.66)	1,023 (40.28)	1,052 (41.42)
6		1,243 (48.94)	1,272 (50.08)
7		1,462 (57.56)	1,491 (58.70)
8		1,682 (66.22)	1,711 (67.36)

### Recommended accessories

Other models and accessories → www.sick.com/M4000\_Advanced

	Brief description	Туре	Part no.
Alignment aid	ds		
	Laser alignment aid for various sensors, laser class 2 (IEC 60825). Do not look into the beam!, 19 mm x 67.3 mm x 66.9 mm	AR60	1015741
	Adapter AR60 for M4000 and M4000 Curtain	AR60 adapter, M4000	4040006
Muting acces	sories		
	Parallel muting (2 sensors), muting sensor brackets for mounting on M4000 housing profile or device columns with external mounting grooves	Muting arm kit M4000, 2 sensors, parallel muting	2060157
	Parallel muting (2 sensors), muting sensor brackets for mounting on M4000 housing profile or device column with external mounting grooves	Muting arm kit M4000, 2 sensors, parallel muting	2060156
Mounting bra	ckets and plates		
	4 pieces, Mounting kit 1, mounting bracket, rigid, L-shaped, including fixing screws and washers	BEF-3WNGBAST4	7021352
Plug connect	ors and cables		
	Head A: female connector, M26, 12-pin, straight Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 5 m	DOL-0612G05M075KM0	2022545
	Head A: female connector, M26, 12-pin, straight Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 10 m	DOL-0612G10M075KM0	2022547
	Head A: female connector, M26, 12-pin, straight Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 20 m	DOL-0612G20M075KM0	2022549
	Head A: male connector, M8, 4-pin, straight Head B: male connector, USB-A, straight Cable: PVC, unshielded, 2 m	DSL-8U04G02M025KM1	6034574
	Head A: male connector, M8, 4-pin, straight Head B: male connector, USB-A, straight Cable: PVC, unshielded, 10 m	DSL-8U04G10M025KM1	6034575
No to	Head A: female connector, M12, 5-pin, straight, A-coded Head B: male connector, M12, 5-pin, straight, A-coded Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 2 m	YF2A15-020UB5M2A15	2096009
	Head A: female connector, M12, 5-pin, straight, A-coded Head B: male connector, M12, 5-pin, straight, A-coded Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 0.6 m	YF2A15-C60UB5M2A15	2096006
	Head A: female connector, M26, 12-pin, straight Cable: unshielded 12 crimping contacts enclosed	DOS-0612G000GA3KM0	6020757
	Head A: female connector, M26, 12-pin, angled Cable: unshielded 12 crimping contacts enclosed	DOS-0612W000GA3KM0	6020758

# M40S-043003AA0, M40E-043003RB0 | M4000 Advanced MULTIPLE LIGHT BEAM SAFETY DEVICES

	Brief description	Туре	Part no.		
Terminal and alignment brackets					
	4 pieces, Mounting kit 6, side bracket, rotatable, zinc diecast	BEF-1SHABAZN4	2019506		
9	4 pieces, Omega bracket, rotatable, fixable with only one screw, for mounting on the swivel mount, including spacer discs	BEF-2SMGEAAL4	2044846		
	4 pieces, Mounting kit 12, rotatable, swivel mount	BEF-2SMGEAKU4	2030510		
Switching am	Switching amplifiers				
reesee.	<ul> <li>Applications: Muting switching amplifier</li> <li>Compatible sensor types: M4000 Advanced multiple light beam safety devices</li> <li>Connection type: Female connector M12, 5-pin</li> <li>Housing width: 76.5 mm</li> </ul>	UE403-A0930	1026287		

### SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

### **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

