



DATA SHEET

WTB26I-24161422A00

W26
Photoelectric sensors

SICK

Sensor Intelligence



Illustration may differ

PHOTOELECTRIC SENSORS

WTB26I-24161422A00

ORDERING INFORMATION

Type	part no.
WTB26I-24161422A00	1109760

Further device versions and accessories at www.sick.com/W26



DETAILED TECHNICAL DATA

FEATURES

Functional principle	Photoelectric proximity sensor
Functional principle detail	Background suppression
Sensing range	
Sensing range min.	30 mm
Sensing range max.	3,000 mm
Adjustable switching threshold for background suppression	180 mm ... 3,000 mm
Reference object	Object with 90% remission factor (complies with standard white according to DIN 5033)
Minimum distance between set sensing range and background (black 6% / white 90%)	190 mm, at a distance of 1000 mm
Recommended sensing range for the best performance	200 mm ... 1,000 mm
Emitted beam	
Light source	LED
Type of light	Infrared light
Shape of light spot	Point-shaped
Light spot size (distance)	Ø 14 mm (1,000 mm)
Maximum dispersion of the emitted beam around the standardized transmission axis (squint angle)	< +/- 1.0° (at T ₀ = +23 °C)
Key LED figures	
Normative reference	EN 62471:2008-09 IEC 62471:2006, modified
LED risk group marking	Free group
Wave length	850 nm
Average service life	100,000 h at T _a = +25 °C
Adjustment	
Teach-Turn adjustment 1	BluePilot For setting the sensing range
Teach-Turn adjustment 2	BluePilot For configuring the time function
IO-Link	For configuring the sensor parameters and Smart Task functions
Display	
LED blue	BluePilot: sensing range indicator
LED green	Operating indicator

LED yellow	Static on: power on Flashing: IO-Link mode Status of received light beam Static on: object present Static off: object not present
------------	---

SAFETY-RELATED PARAMETERS

MTTF _D	507 years
DC _{avg}	0 %
T _M (mission time)	20 years

COMMUNICATION INTERFACE

IO-Link	✓, IO-Link V1.1
Data transmission rate	COM2 (38,4 kBaud)
VendorID	26
DeviceID HEX	0x800238
DeviceID DEC	8389176
Compatible master port type	A
SIO mode support	Yes

ELECTRONICS

Supply voltage U _B	10 V DC ... 30 V DC ¹⁾																				
Ripple	≤ 5 V _{pp}																				
Usage category	DC-12 (According to EN 60947-5-2) DC-13 (According to EN 60947-5-2)																				
Current consumption	≤ 30 mA, without load. At U _B = 24 V																				
Protection class	III																				
Digital output	<table> <tr> <td>Number</td><td>2 (Complementary)</td></tr> <tr> <td>Type</td><td>Push-pull: PNP/NPN</td></tr> <tr> <td>Switching mode</td><td>Light/dark switching</td></tr> <tr> <td>Signal voltage PNP HIGH/LOW</td><td>Approx. U_B - 2.5 V / 0 V</td></tr> <tr> <td>Signal voltage NPN HIGH/LOW</td><td>Approx. U_B / < 2.5 V</td></tr> <tr> <td>Output current I_{max.}</td><td>≤ 100 mA</td></tr> <tr> <td>Circuit protection outputs</td><td>Reverse polarity protected Overcurrent and short-circuit protected</td></tr> <tr> <td>Response time</td><td>≤ 2.5 ms ²⁾</td></tr> <tr> <td>Repeatability (response time)</td><td>150 μs</td></tr> <tr> <td>Switching frequency</td><td>200 Hz ³⁾</td></tr> </table>	Number	2 (Complementary)	Type	Push-pull: PNP/NPN	Switching mode	Light/dark switching	Signal voltage PNP HIGH/LOW	Approx. U _B - 2.5 V / 0 V	Signal voltage NPN HIGH/LOW	Approx. U _B / < 2.5 V	Output current I _{max.}	≤ 100 mA	Circuit protection outputs	Reverse polarity protected Overcurrent and short-circuit protected	Response time	≤ 2.5 ms ²⁾	Repeatability (response time)	150 μs	Switching frequency	200 Hz ³⁾
Number	2 (Complementary)																				
Type	Push-pull: PNP/NPN																				
Switching mode	Light/dark switching																				
Signal voltage PNP HIGH/LOW	Approx. U _B - 2.5 V / 0 V																				
Signal voltage NPN HIGH/LOW	Approx. U _B / < 2.5 V																				
Output current I _{max.}	≤ 100 mA																				
Circuit protection outputs	Reverse polarity protected Overcurrent and short-circuit protected																				
Response time	≤ 2.5 ms ²⁾																				
Repeatability (response time)	150 μs																				
Switching frequency	200 Hz ³⁾																				
Pin/Wire assignment	<table> <tr> <td>Function of pin 4/black (BK)</td><td>Digital output, light switching, object present → output Q_{LI} HIGH; IO-Link communication C ⁴⁾</td></tr> <tr> <td>Function of pin 4/black (BK) – detail</td><td>The pin 4 function of the sensor can be configured Additional possible settings via IO-Link</td></tr> <tr> <td>Function of pin 2/white (WH)</td><td>Digital output, dark switching, object present → output Q̄_{LI} LOW ⁴⁾</td></tr> <tr> <td>Function of pin 2/white (WH) – detail</td><td>The pin 2 function of the sensor can be configured Additional possible settings via IO-Link</td></tr> </table>	Function of pin 4/black (BK)	Digital output, light switching, object present → output Q _{LI} HIGH; IO-Link communication C ⁴⁾	Function of pin 4/black (BK) – detail	The pin 4 function of the sensor can be configured Additional possible settings via IO-Link	Function of pin 2/white (WH)	Digital output, dark switching, object present → output Q̄ _{LI} LOW ⁴⁾	Function of pin 2/white (WH) – detail	The pin 2 function of the sensor can be configured Additional possible settings via IO-Link												
Function of pin 4/black (BK)	Digital output, light switching, object present → output Q _{LI} HIGH; IO-Link communication C ⁴⁾																				
Function of pin 4/black (BK) – detail	The pin 4 function of the sensor can be configured Additional possible settings via IO-Link																				
Function of pin 2/white (WH)	Digital output, dark switching, object present → output Q̄ _{LI} LOW ⁴⁾																				
Function of pin 2/white (WH) – detail	The pin 2 function of the sensor can be configured Additional possible settings via IO-Link																				

¹⁾ Limit values.

²⁾ Signal transit time with resistive load in switching mode.

³⁾ With light/dark ratio 1:1.

⁴⁾ This switching output must not be connected to another output.

MECHANICS

Housing	Rectangular
Dimensions (W x H x D)	24.6 mm x 82.5 mm x 53.3 mm
Connection	Male connector M12, 4-pin
Material	
Housing	Plastic, VISTAL®
Front screen	Plastic, PMMA
Male connector	Plastic, VISTAL®
Weight	Approx. 80 g
Maximum tightening torque of the fixing screws	1.3 Nm

AMBIENT DATA

Enclosure rating	IP66 (EN 60529) IP67 (EN 60529) IP69 (EN 60529) ¹⁾
Ambient operating temperature	-40 °C ... +60 °C
Ambient temperature, storage	-40 °C ... +75 °C
Shock resistance	50 g, 11 ms (25 positive and 25 negative shocks per axis, for X, Y, Z axes, 150 shocks in total (EN60068-2-27)) 50 g, 6 ms (5,000 positive and 5,000 negative shocks per axis, for X, Y, Z axes, 30,000 shocks in total (EN60068-2-27))
Vibration resistance	10 Hz ... 2,000 Hz (Amplitude 0.5 mm / 10 g, 20 sweeps per axis, for X, Y, Z axes, 1 octave/min, (EN60068-2-6))
Air humidity	35 % ... 95 %, relative humidity (no condensation)
Electromagnetic compatibility (EMC)	EN 60947-5-2
Resistance to cleaning agent	ECOLAB
UL File No.	NRKH.E181493 & NRKH7.E181493

¹⁾ Replaces IP69K with ISO 20653: 2013-03.

SMART TASK

Smart Task name	Base logics
Logic function	Direct AND OR Window Hysteresis
Timer function	Deactivated Switch-on delay Off delay ON and OFF delay Impulse (one shot)
Inverter	Yes
Switching frequency	SIO Logic: 200 Hz ¹⁾ IOL: 200 Hz ²⁾
Response time	SIO Logic: 2,5 ms ¹⁾ IOL: 2,5 ms ²⁾
Repeatability	SIO Logic: 300 µs ¹⁾ IOL: 400 µs ²⁾
Switching signal	
Switching signal Q _⊥	Switching output
Switching signal Q̄ _⊥	Switching output

¹⁾ Use of Smart Task functions without IO-Link communication (SIO mode).

²⁾ Use of Smart Task functions with IO-Link communication function.


DIAGNOSIS

Device status	Yes
Quality of teach	Yes

CERTIFICATES

EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
Moroccan declaration of conformity	✓
China RoHS	✓
China Compulsory Product Certification (CCC) exempt	✓
ECOLAB certificate	✓
cULus certificate	✓
IO-Link certificate	✓
Photobiological safety (DIN EN 62471) certificate	✓
Information according to Art. 3 of Data Act (Regulation EU 2023/2854)	✓


DIMENSIONAL DRAWING, SENSOR

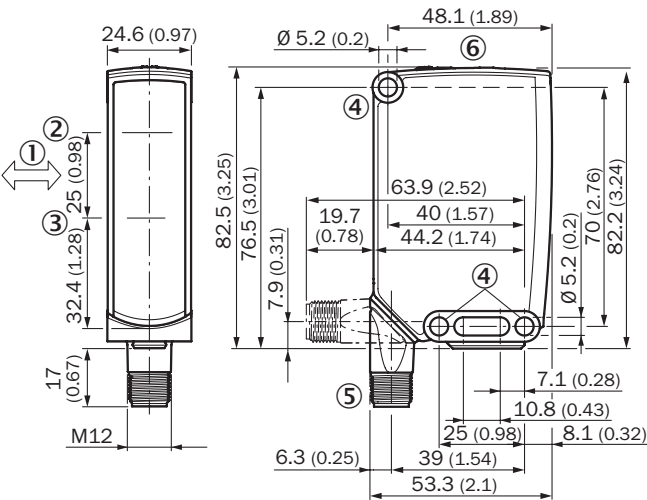

Dimensions in mm (inch)


- ① Standard direction of the material being detected
- ② Center of optical axis, sender
- ③ Center of optical axis, receiver
- ④ Mounting hole, Ø 5.2 mm
- ⑤ Connection
- ⑥ display and adjustment elements

DISPLAY AND ADJUSTMENT ELEMENTS




- ① LED indicator green
- ② LED indicator yellow
- ③ Teach-Turn adjustment 1
- ④ LED blue 1
- ⑤ Teach-Turn adjustment 2
- ⑥ LED blue 2

CONNECTION TYPE M12 MALE CONNECTOR, 4-PIN



CONNECTION DIAGRAM CD-390



TRUTH TABLE PUSH-PULL: PNP/NPN – DARK SWITCHING $\bar{Q}$


	Dark switching $\bar{Q}$ (normally closed (upper switch), normally open (lower switch))	
	Object not present → Output HIGH	Object present → Output LOW
Light receive	✗	✓
Light receive indicator	✗	☀
Load resistance to L+	✗	⚡
Load resistance to M	⚡	✗

TRUTH TABLE PUSH-PULL: PNP/NPN - LIGHT SWITCHING Q

	Light switching Q (normally open (upper switch), normally closed (lower switch))	
	Object not present → Output LOW	Object present → Output HIGH
Light receive	✗	✓
Light receive indicator	✗	☀
Load resistance to L+	⚡	✗
Load resistance to M	✗	⚡

CHARACTERISTIC CURVE


Minimum distance in mm (y) between the set sensing range and white background (90 % remission)

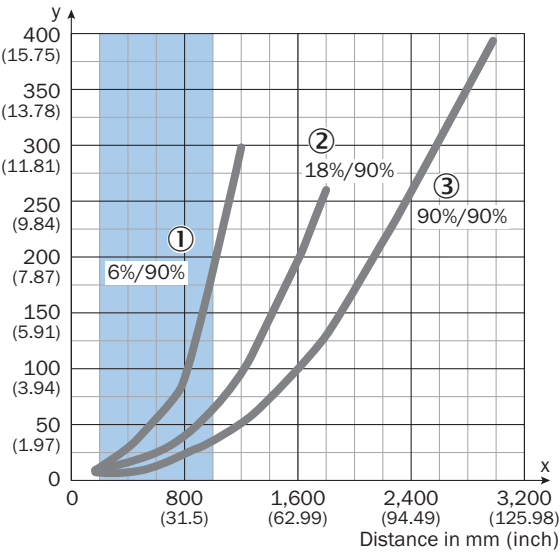

Recommended sensing range for the best performance


- ① Black object, 6% remission factor
- ② Gray object, 18% remission factor
- ③ White object, 90% remission factor

Example:
Safe suppression of the background

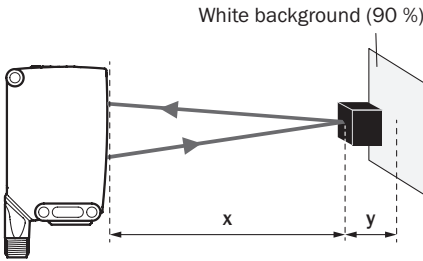


Black object (6 % remission)
Set sensing range x = 1,000 mm
Needed minimum distance to white background y = 190 mm

LIGHT SPOT SIZE

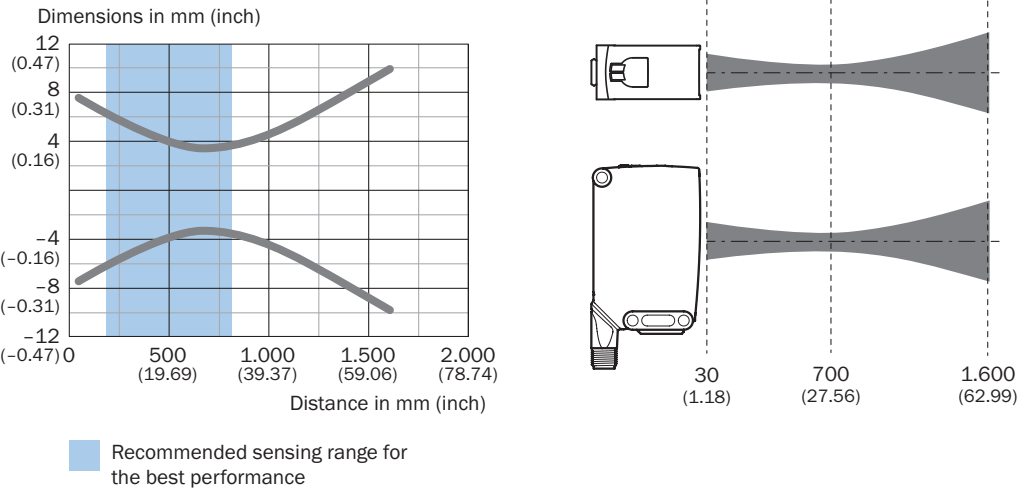

SENSING RANGE DIAGRAM

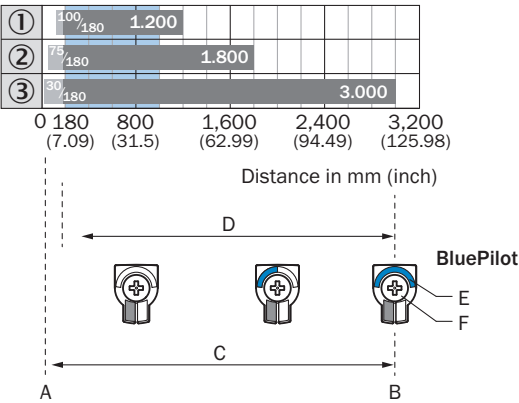

Recommended sensing range for the best performance

1	Black object, 6% remission factor
2	Gray object, 18% remission factor
3	White object, 90% remission factor
A	Sensing range min. in mm
B	Sensing range max. in mm
C	Field of view
D	Adjustable switching threshold for background suppression
E	Sensing range indicator
F	Teach-Turn adjustment

Further information as well as suitable accessories, example applications and downloads such as CAD dimensional models, operating instructions and software can be found at www.sick.com/1109760



SICK AG
WALDKIRCH
GERMANY
SICK.COM

SICK AT A GLANCE

SICK is a leading global technology company for intelligent sensors and integrated solutions in industrial automation. Our technologies set benchmarks, making your industrial processes more efficient, safer and more sustainable – both in logistics and manufacturing operations.

SICK combines sensor intelligence with industry expertise and certified consulting services. We provide the ideal foundation for scalable as well as tailor-made automation solutions and create added value along the entire value chain. Our close partnerships with our customers are more than just a promise: Together, we optimize productivity, improve quality, protect health and safety, and help build a sustainable future. All with empathy and trust.

Since 1946, we have been developing innovative technologies with passion and a pioneering spirit. With a global network in around 40 countries, SICK has a global presence and is always close by. The company's headquarters are located in Waldkirch near Freiburg, Germany. Our customers benefit from our understanding of both local and global requirements, which enables us to deliver tailor-made solutions

SICK
Sensor Intelligence