SICK.COM



技術資料

FLA-PWRI00001

Flexi Loop
安全感測器串接

SICK Sensor Intelligence



安全感測器串接

FLA-PWRI00001

訂購資訊

型號	貨號
FLA-PWRI00001	1061715


更多裝置規格與配件請參閱： www.sick.com/Flexi_Loop

詳細技術資料

證書


EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
China RoHS	✓
UK-Type-Examination approval	✓
cULus certificate	✓
cTUVus認證	✓
EC-Type-Examination approval	✓
EC-Type-Examination approval (Machinery Regulation)	✓
Information according to Art. 3 of Data Act (Regulation EU 2023/2854)	✓

尺寸圖 FLA-PWRI00001

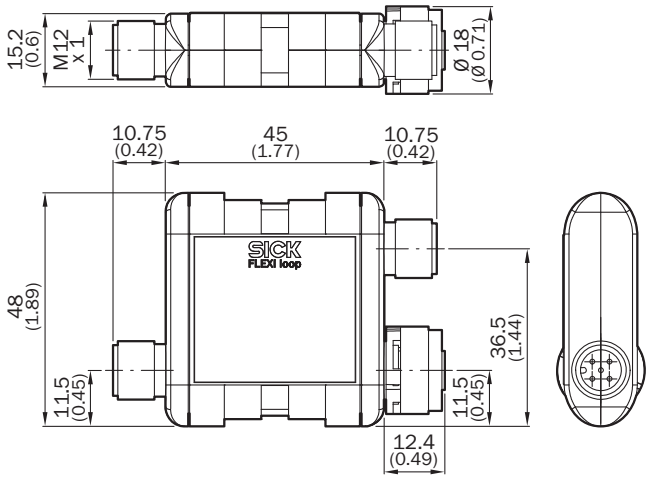

尺寸 (mm)

針腳分配

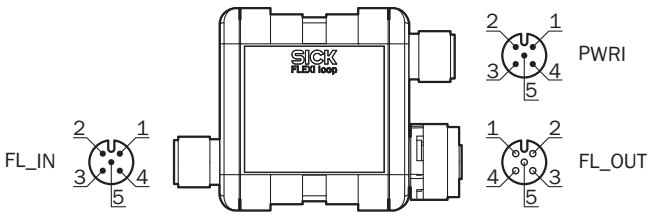

連接Flexi Soft時，引腳分配FL_IN僅適用于安全感測器串聯首個Loop節點。其他Flexi-Loop節點可透過附M12插頭的標準型電纜線與FL_OUT相連。

接頭	引腳	信號	描述	電纜線顏色編碼
FL_IN	1	VDC	24 V電源電壓	棕色
	2	DATA_OUT	輸出至Flexi Soft輸入In +1	白色
	3	GND	接地電源電壓	藍色
	4	SAFE_OUT	安全關閉信號，輸出至Flexi Soft輸入In	黑色
	5	DATA_IN	從Flexi Soft輸出Xn的輸入	灰色
PWRI	1	VDC	所連電源供應器的24 V電源電壓	棕色
	2	VDC	所連電源供應器的24 V電源電壓	白色
	3	GND	所連電源供應器的接地	藍色
	4	GND	所連電源供應器的接地	黑色
	5	NC	未連接	灰色
指定顏色適用於使用預集束電纜線時（無保證）。				

關於合適配件、應用範例及下載內容（如CAD尺寸模型、操作說明、軟體等）的其他資訊請參閱:
www.sick.com/1061715

SICK AG
WALDKIRCH
GERMANY
SICK.COM

SICK企業情況總纜

SICK是世界領先的專業為工業自動化提供智慧型感測器解決方案與一體化解決方案的技術企業。我們的技術為全球樹立了標準，令您在物流與生產領域的工業流程更高效、更安全、更具永續性。

SICK將感測器智慧與對行業的深刻理解及獲得認證的顧問服務有機結合。我們提供了打造可擴充的客製化自動化解決方案的理想基礎，並為整條價值創造鏈帶來附加價值。我們與客戶建立了密切的合作夥伴關係，這不止是一項承諾：我們還將攜手改進生產效率，提高品質，保護人員健康與安全，並保障未來的永續發展。這一切都建立在相互理解、相互信任的基礎上。

自1946年創辦開始，SICK始終懷有對技術的熱愛，發揚先驅精神，積極研發一系列創新技術。SICK在全球大約40個國家與地區構建起了網路，以此開展跨國經營，並始終伴您左右。企業總部位於德國弗萊堡附近的瓦爾德基爾希。我們將對本地及全球化要求的認識轉化為客製化解決方案，令客戶大為受益。

SICK
Sensor Intelligence