

M40S-034013AA0

M4000 Advanced

SAFETY MULTIBEAM SENSORS





Ordering information

| Scanning range | Number of beams | Beam sep- aration | System part | Туре | Part no. |
|--------------------------|--------------------|----------------------|-------------|--------------------|----------|
| 0.5 m 70 m, configurable | 3 | 400 mm | Sender | M40S- 034013AA0 | 1200069 |

Other models and accessories → www.sick.com/M4000_Advanced

Illustration may differ



Detailed technical data

Features

| Scanning range | 0.5 m 70 m, configurable |
|--------------------------------|--------------------------|
| Low scanning range | 0.5 m 20 m |
| Great scanning range | 9 m 70 m |
| Number of beams | 3 |
| Beam separation | 400 mm |
| Response time | 10 ms |
| Synchronization | Optical synchronisation |
| Integrated laser alignment aid | ✓ |

Safety-related parameters

| Туре | Type 4 (IEC 61496-1) |
|-------------------------------------------------------------------------|----------------------------------------|
| Safety integrity level | SIL 3 (IEC 61508) |
| Category | Category 4 (EN ISO 13849) |
| Performance level | PL e (EN ISO 13849) |
| $\ensuremath{PFH_D}$ (mean probability of a dangerous failure per hour) | 6.6 x 10 ⁻⁹ (EN ISO 13849) |
| T _M (mission time) | 20 years (EN ISO 13849) |
| Safe state in the event of a fault | At least one OSSD is in the OFF state. |

Functions

| | Functions | Delivery status |
|--------------------------------------------|-----------|---------------------|
| Beam coding | ✓ | Uncoded |
| Restart interlock | ✓ | |
| External device monitoring (EDM) | ✓ | |
| Sender test | ✓ | Deactivated |
| Configurable scanning range | ✓ | |
| Configurable application diagnostic output | ✓ | Contamination (OWS) |

| | Functions | Delivery status |
|---------------------------------------------------|----------------------------------------|-----------------|
| Safe SICK device communication via EFI | ✓ | |
| Differentiation between man and material (muting) | 1 | |
| Type of human-material differentiation | Flexible, configurable 4-signal muting | |

Interfaces

| System connection | Hirschmann male connector M26, 12-pin |
|--------------------------|-----------------------------------------------------|
| Permitted cable length | 50 m ¹⁾ |
| Permitted cross-section | ≥ 0.75 mm² |
| Configuration connection | Female connector M8, 4-pin |
| Configuration method | PC with CDS (Configuration and Diagnostic Software) |
| Display elements | LEDs 7-segment display |

 $^{^{1)}}$ Depending on load, power supply and wire cross-section. The technical specifications must be observed.

Electrical data

| Protection class | III (IEC 61140) |
|-------------------------------|---------------------------------------------|
| Supply voltage V _S | 24 V DC (19.2 V DC 28.8 V DC) ¹⁾ |
| Residual ripple | ≤ 10 % ²⁾ |
| Power consumption | ≤ 0.2 A |

¹⁾ The external voltage supply must be capable of buffering brief mains voltage failures of 20 ms as specified in EN 60204-1. Suitable power supplies are available as accessories from SICK.

Mechanical data

| Dimensions | See dimensional drawing |
|-----------------------|------------------------------------------|
| Housing cross-section | 52 mm x 55.5 mm |
| Material | |
| Housing | Aluminum alloy ALMGSI 0.5, powder coated |
| Front screen | Polycarbonate, scratch-resistant coating |

Ambient data

| Enclosure rating | IP65 (EN 60529) |
|-------------------------------|------------------------------|
| Ambient operating temperature | -30 °C +55 °C |
| Storage temperature | -30 °C +70 °C |
| Air humidity | 15 % 95 %, Non-condensing |
| Shock resistance | 10 g, 16 ms (IEC 60068-2-29) |

Other information

| Wave length | 850 nm |
|--------------------------------|--------|
| Integrated laser alignment aid | ✓ |

Classifications

| eCl@ss 5.0 | 27272703 |
|--------------|----------|
| eCl@ss 5.1.4 | 27272703 |

 $^{^{2)}}$ Within the limits of V_S .

| eCl@ss 6.0 | 27272703 |
|----------------|----------|
| | |
| eCl@ss 6.2 | 27272703 |
| eCl@ss 7.0 | 27272703 |
| eCl@ss 8.0 | 27272703 |
| eCl@ss 8.1 | 27272703 |
| eCl@ss 9.0 | 27272703 |
| eCl@ss 10.0 | 27272703 |
| eCl@ss 11.0 | 27272703 |
| eCl@ss 12.0 | 27272703 |
| ETIM 5.0 | EC001832 |
| ETIM 6.0 | EC001832 |
| ETIM 7.0 | EC001832 |
| ETIM 8.0 | EC001832 |
| UNSPSC 16.0901 | 46171620 |

Dimensional drawing (Dimensions in mm (inch))

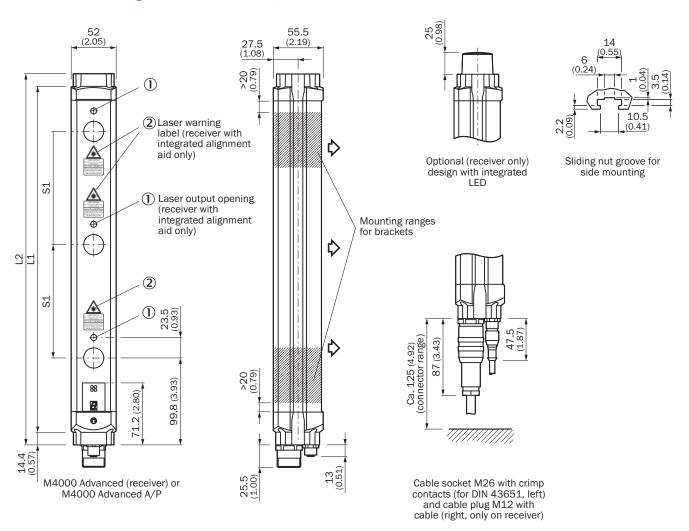


Illustration sender (receiver mirror image)

| Number of beams | Beam separation S1 | L1 | L2 |
|-----------------|--------------------|---------------|---------------|
| 2 | 500 (19.69) | 643 (25.31) | 672 (26.46) |
| | 600 (23.62) | 743 (29.25) | 772 (30.39) |
| 3 | 220 (8.66) | 583 (22.95) | 612 (24.09) |
| | 400 (15.75) | 943 (37.13) | 972 (38.27) |
| | 450 (17.72) | 1,043 (41.06) | 1,072 (42.20) |
| 4 | 220 (8.66) | 803 (31.61) | 832 (32.76) |
| | 300 (11.81) | 1,043 (41.06) | 1,072 (42.20) |
| 5 | 220 (8.66) | 1,023 (40.28) | 1,052 (41.42) |
| 6 | | 1,243 (48.94) | 1,272 (50.08) |
| 7 | | 1,462 (57.56) | 1,491 (58.70) |
| 8 | | 1,682 (66.22) | 1,711 (67.36) |

Recommended accessories

Other models and accessories → www.sick.com/M4000_Advanced

| | Brief description | Туре | Part no. |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|----------|
| Alignment ai | ds | | |
| | Laser alignment aid for various sensors, laser class 2 (IEC 60825). Do not look into the beam!, 19 mm x 67.3 mm x 66.9 mm | AR60 | 1015741 |
| | Adapter AR60 for M4000 and M4000 Curtain | AR60 adapter, M4000 | 4040006 |
| Muting acces | ssories | | |
| | Parallel muting (2 sensors), muting sensor brackets for mounting on M4000 housing profile or device columns with external mounting grooves | Muting arm kit M4000, 2 sensors, parallel muting | 2060157 |
| | Parallel muting (2 sensors), muting sensor brackets for mounting on M4000 housing profile or device column with external mounting grooves | | 2060156 |
| Mounting bra | ackets and plates | | |
| | 4 pieces, Mounting kit 1, mounting bracket, rigid, L-shaped, including fixing screws and washers | BEF-3WNGBAST4 | 7021352 |
| Plug connect | ors and cables | | |
| | Head A: female connector, M26, 12-pin, straight Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 5 m | DOL-0612G05M075KM0 | 2022545 |
| | Head A: female connector, M26, 12-pin, straight Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 10 m | DOL-0612G10M075KM0 | 2022547 |
| | Head A: female connector, M26, 12-pin, straight Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 20 m | DOL-0612G20M075KM0 | 2022549 |

M40S-034013AA0 | M4000 Advanced SAFETY MULTIBEAM SENSORS

| | Brief description | Туре | Part no. | | | |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------|--|--|--|
| | Head A: male connector, M8, 4-pin, straight Head B: male connector, USB-A, straight Cable: PVC, unshielded, 2 m | DSL-8U04G02M025KM1 | 6034574 | | | |
| | Head A: male connector, M8, 4-pin, straight Head B: male connector, USB-A, straight Cable: PVC, unshielded, 10 m | DSL-8U04G10M025KM1 | 6034575 | | | |
| No No | Head A: female connector, M12, 5-pin, straight, A-coded Head B: male connector, M12, 5-pin, straight, A-coded Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 2 m | YF2A15-020UB5M2A15 | 2096009 | | | |
| | Head A: female connector, M12, 5-pin, straight, A-coded Head B: male connector, M12, 5-pin, straight, A-coded Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 0.6 m | YF2A15-C60UB5M2A15 | 2096006 | | | |
| | Head A: female connector, M26, 12-pin, straight Cable: unshielded 12 crimping contacts enclosed | DOS-0612G000GA3KM0 | 6020757 | | | |
| | Head A: female connector, M26, 12-pin, angled Cable: unshielded 12 crimping contacts enclosed | DOS-0612W000GA3KM0 | 6020758 | | | |
| Terminal and | alignment brackets | | | | | |
| | 4 pieces, Mounting kit 6, side bracket, rotatable, zinc diecast | BEF-1SHABAZN4 | 2019506 | | | |
| 9 | 4 pieces, Omega bracket, rotatable, fixable with only one screw, for mounting on the swivel mount, including spacer discs | BEF-2SMGEAAL4 | 2044846 | | | |
| | 4 pieces, Mounting kit 12, rotatable, swivel mount | BEF-2SMGEAKU4 | 2030510 | | | |
| Switching an | Switching amplifiers | | | | | |
| 999988 | Applications: Muting switching amplifier Compatible sensor types: M4000 Advanced multiple light beam safety devices | UE403-A0930 | 1026287 | | | |
| | | | | | | |

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com

