


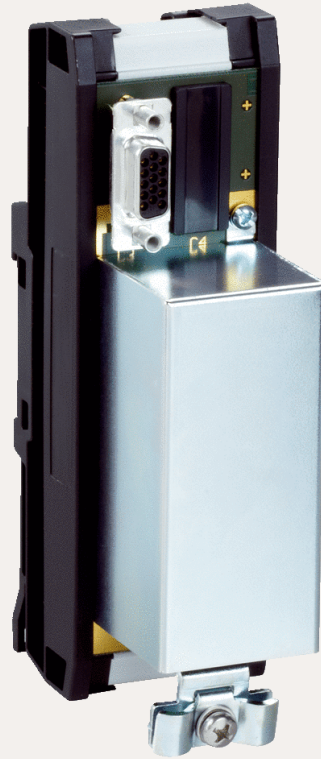

DATA SHEET

FX3-EBX400002

Interface modules
Integration modules and adapters

SICK

Sensor Intelligence



INTEGRATION MODULES AND ADAPTERS

FX3-EBX400002

ORDERING INFORMATION

Type	part no.
FX3-EBX400002	2068729

Further device versions and accessories at www.sick.com/Interface_modules



DETAILED TECHNICAL DATA


FEATURES

Product segment	Integration modules and adapters
Product	Interface modules
Specialty	Dual encoder connector box

CERTIFICATES


EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
China RoHS	✓
cULus certificate	✓

DIMENSIONAL DRAWING

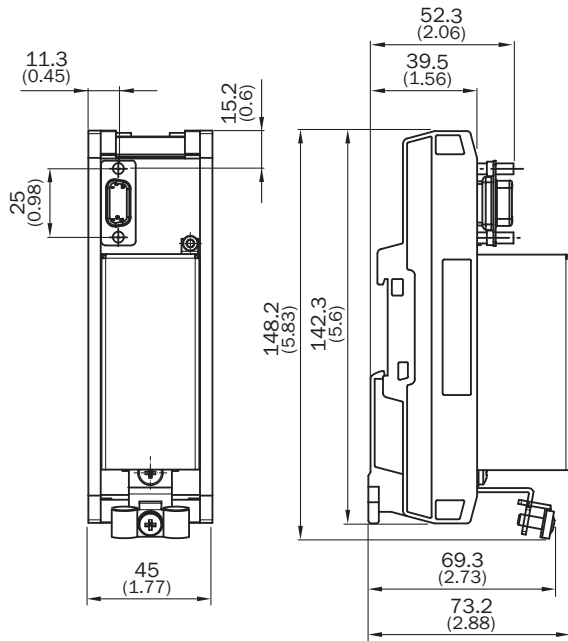

Dimensions in mm (inch)


PIN ASSIGNMENT

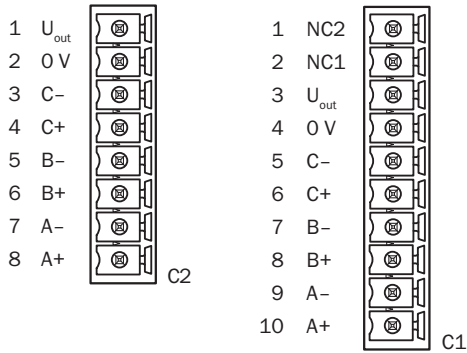

Spring terminals	PIN	Signal	Description
C1	1	NC2	Do not connect. Used to forward a signal.
	2	NC1	Do not connect. Used to forward a signal.
	3	U _{out}	Encoder voltage supply of the on-board voltage supply of this motor feedback splitter box
	4	ENC1_0V	GND encoder connection
	5	ENC1_C-	Encoder 1, channel C, negative signal
	6	ENC1_C+	Encoder 1, channel C, positive signal
	7	ENC1_B-	Encoder 1, channel B, negative signal
	8	ENC1_B+	Encoder 1, channel B, positive signal
	9	ENC1_A-	Encoder 1, channel A, negative signal
	10	ENC1_A+	Encoder 1, channel A, positive signal
-	-	-	-
C1	1	U _{out}	Encoder voltage supply of the voltage controller of this connection box
	2	ENC_0V	GND encoder connection

Spring terminals	PIN	Signal	Description
	3	ENC2_C-	Encoder 2, channel C, negative signal
	4	ENC2_C+	Encoder 2, channel C, positive signal
	5	ENC2_B-	Encoder 2, channel B, negative signal
	6	ENC2_B+	Encoder 2, channel B, positive signal
	7	ENC2_A-	Encoder 2, channel A, negative signal
	8	ENC2_A+	Encoder 2, channel A, positive signal

PIN ASSIGNMENT



PIN	Signal	Description
1	ENC1_A+	Encoder 1, signal pair A, positive signal
2	ENC1_A-	Encoder 1, signal pair A, negative signal
3	ENC1_24V	24 V voltage supply for encoder 1
4	ENC2_A+	Encoder 2, signal pair A, positive signal
5	ENC2_A-	Encoder 2, signal pair A, negative signal
6	ENC1_B+	Encoder 1, signal pair B, positive signal
7	ENC1_B-	Encoder 1, signal pair B, negative signal
8	ENC_0V	0 V voltage supply for encoder 1 and encoder 2
9	ENC2_B+	Encoder 2, signal pair B, positive signal
10	ENC2_B-	Encoder 2, signal pair B, negative signal
11	ENC1_C+	Encoder 1, signal pair C, positive signal
12	ENC1_C-	Encoder 1, signal pair C, negative signal
13	ENC2_24V	24 V voltage supply for encoder 2
14	ENC2_C+	Encoder 2, signal pair C, positive signal
15	ENC2_C-	Encoder 2, signal pair C, negative signal

Further information as well as suitable accessories, example applications and downloads such as CAD di-
mensional models, operating instructions and software can be found at www.sick.com/2068729



SICK AG
WALDKIRCH
GERMANY
SICK.COM

SICK AT A GLANCE

SICK is a leading global technology company for intelligent sensors and integrated solutions in industrial automation. Our technologies set benchmarks, making your industrial processes more efficient, safer and more sustainable – both in logistics and manufacturing operations.

SICK combines sensor intelligence with industry expertise and certified consulting services. We provide the ideal foundation for scalable as well as tailor-made automation solutions and create added value along the entire value chain. Our close partnerships with our customers are more than just a promise: Together, we optimize productivity, improve quality, protect health and safety, and help build a sustainable future. All with empathy and trust.

Since 1946, we have been developing innovative technologies with passion and a pioneering spirit. With a global network in around 40 countries, SICK has a global presence and is always close by. The company's headquarters are located in Waldkirch near Freiburg, Germany. Our customers benefit from our understanding of both local and global requirements, which enables us to deliver tailor-made solutions

SICK
Sensor Intelligence