

# STS030-HN030-AK22

STS

MOTOR FEEDBACK SYSTEMS

**SICK**  
Sensor Intelligence.




Illustration may differ

### Ordering information

Type	part no.
STS030-HN030-AK22	1121155

Other models and accessories → [www.sick.com/STS](http://www.sick.com/STS)

### Detailed technical data

#### Features

<b>Items supplied</b>	Magnetic tape not included with delivery, Mounting screws not included with delivery.
-----------------------	---

#### Safety-related parameters

<b>MTTF<sub>D</sub> (mean time to dangerous failure)</b>	190 years (EN ISO 13849) <sup>1)</sup>
--	--

<sup>1)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 60 °C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

#### Performance

<b>Sine/cosine periods per revolution</b>	70
<b>Number of the absolute ascertainable revolutions</b>	1
<b>Total number of steps</b>	2,240 via RS485
<b>Measuring step</b>	4.52 " For interpolation of the sine/cosine signals with, e. g., 12 bits
<b>Available memory area</b>	1,792 Byte
<b>System accuracy</b>	± 0.09° <sup>1)</sup>
<b>Repeatability</b>	0.01° <sup>1)</sup>
<b>Pin length</b>	2 mm

<sup>1)</sup> Typical values for mechanical runout of the system from ≤ 50 µm and +20 °C.

#### Interfaces

<b>Type of code for the absolute value</b>	Binary
<b>Code sequence</b>	Increasing, when turning the shaft For clockwise rotation, looking in direction "A" (see dimensional drawing)
<b>Communication interface</b>	HIPERFACE®

#### Electronics

<b>Connection type</b>	Male connector, 8-pin
<b>Supply voltage</b>	7 V DC ... 12 V DC
<b>Recommended supply voltage</b>	8 V DC
<b>Current consumption</b>	250 mA <sup>1)</sup>

<sup>1)</sup> Without load.

## Mechanics

<b>Shaft version</b>	Through hollow shaft
<b>Material, sensor head</b>	Aluminum
<b>Material, magnetic tape</b>	17410 Hard ferrite 9/28 P
<b>Material, ring</b>	Aluminum
<b>Dimensions</b>	See dimensional drawing
<b>Weight</b>	≤ 0.15 kg (sensor head) ≤ 0.25 kg (Magnetic tape ring)
<b>Moment of inertia of the rotor</b>	85 gcm <sup>2</sup>
<b>Operating speed</b>	10,500 min <sup>-1</sup>
<b>Angular acceleration</b>	≤ 50,000 rad/s <sup>2</sup>
<b>Permissible radial shaft movement</b>	≤ 0.6 mm <sup>1)</sup>
<b>Permissible axial shaft movement</b>	± 0.5 mm <sup>1)</sup>

<sup>1)</sup> Relative to the installation position, as described in the assembly instructions (order nr. 8026831) and in the proposed customer fitting.

## Ambient data

<b>Operating temperature range</b>	-30 °C ... +105 °C, sensor head -30 °C ... +100 °C, Magnetic tape ring
<b>Storage temperature range</b>	-30 °C ... +100 °C, without package
<b>Relative humidity/condensation</b>	95 %, Condensation not permitted
<b>Resistance to shocks</b>	100 g, 6 ms (according to EN 60068-2-27)
<b>Frequency range of resistance to vibrations</b>	20 g, 10 Hz ... 2,000 Hz (EN 60068-2-6)
<b>EMC</b>	According to EN 61000-6-2 and EN 61000-6-4 <sup>1)</sup>
<b>Enclosure rating</b>	IP00
<b>Temperature coefficient magnetic tape</b>	(11 ± 1) μm/K/m
<b>Maximum permitted ambient field strength</b>	< 3 kA/m ... 4 kA/m (3.8 mT ... 5 mT), to guarantee compliance with the quoted accuracy values <sup>2)</sup>
<b>Maximum permitted field strength</b>	< 150 kA/m (< 190 mT), to ensure that the magnetic tape is not permanently damaged

<sup>1)</sup> The EMC according to the standards quoted is achieved when the motor feedback system is mounted in an electrically conductive housing, which is connected to the central earthing point of the motor controller via a cable screen. Please observe the information in the mounting instructions (part number 8026831).


<sup>2)</sup> The maximum permitted external field influence is reached when the position value deviates from the original value (without external field influence) by more than 5 μm. This value is reached when, at the sensor location, a field strength of 3 kA/m to 4 kA/m (3.8 mT to 5 mT) occurs in addition to the field strength of the magnetic tape.

## Classifications

<b>ECLASS 5.0</b>	27270590
<b>ECLASS 5.1.4</b>	27270590
<b>ECLASS 6.0</b>	27270590
<b>ECLASS 6.2</b>	27270590
<b>ECLASS 7.0</b>	27270590
<b>ECLASS 8.0</b>	27270590
<b>ECLASS 8.1</b>	27270590
<b>ECLASS 9.0</b>	27270590
<b>ECLASS 10.0</b>	27273805
<b>ECLASS 11.0</b>	27273901


<b>ECLASS 12.0</b>	27273901
<b>ETIM 5.0</b>	EC001486
<b>ETIM 6.0</b>	EC001486
<b>ETIM 7.0</b>	EC001486
<b>ETIM 8.0</b>	EC001486
<b>UNSPSC 16.0901</b>	41112113

Dimensional drawing Distance between sensor head and magnetic ring

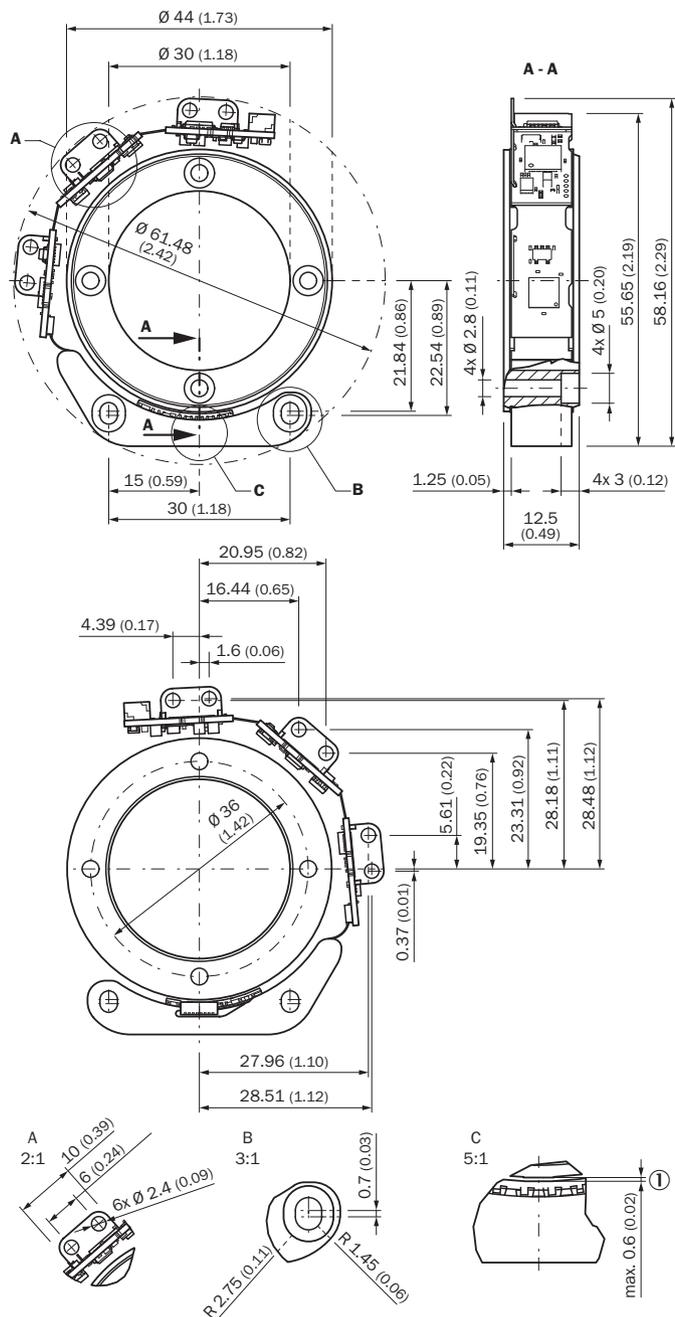


Dimensions in mm (inch)

Attachment specifications

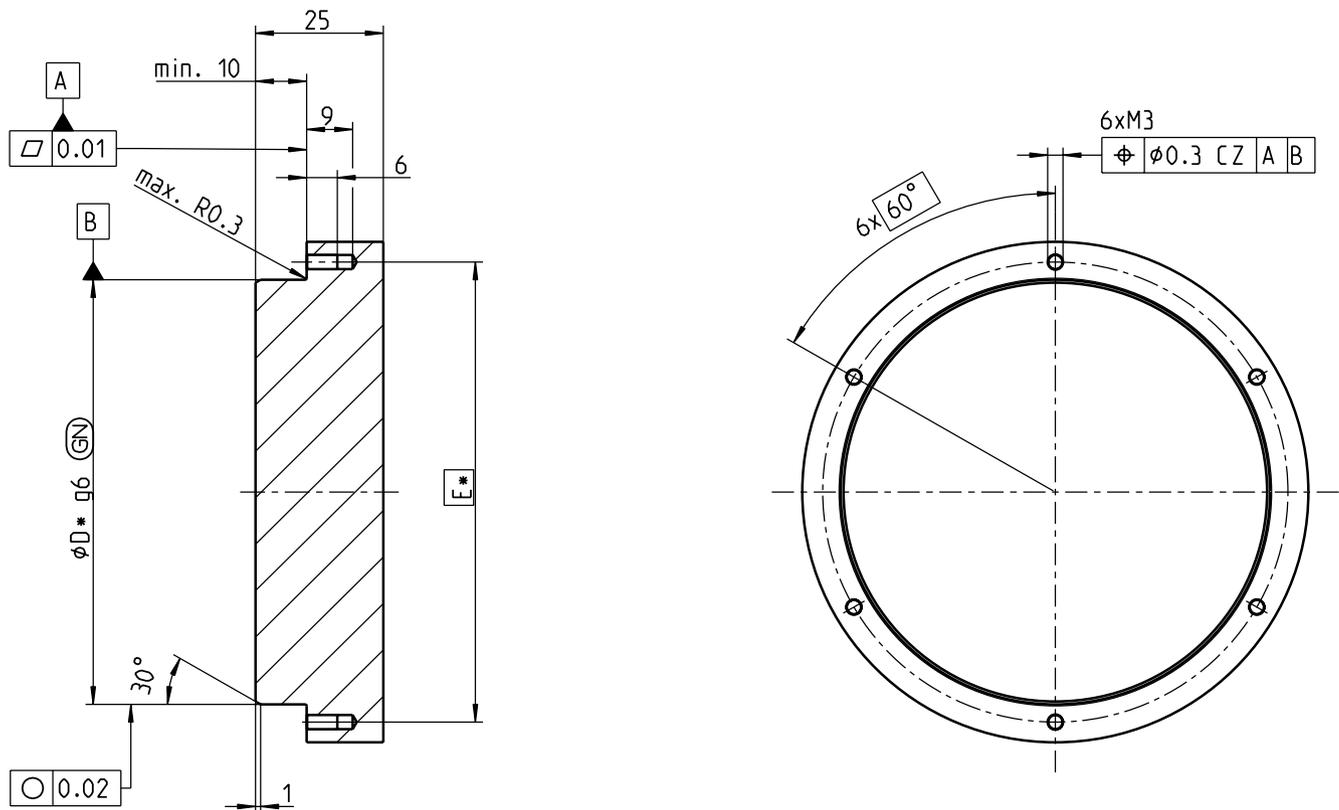

Type	Ø D	Ø E
STS030	30 mm	36 mm
STS065	65 mm	72 mm
STS084	84 mm	91 mm


PIN assignment View of the plug-in face

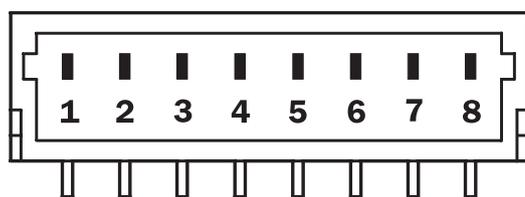

PIN	Signal	Wire colors (cable connection)	Explanation
1	U <sub>S</sub>	Red	Supply voltage
2	+ SIN	White	Process data channel
3	REFSIN	Brown	Process data channel
4	+ COS	Pink	Process data channel
5	REFCOS	Black	Process data channel
6	GND	Blue	Ground connection
7	Data +	Gray or yellow	Parameter channel RS 485

PIN	Signal	Wire colors (cable connection)	Explanation
8	Data -	Green or purple	Parameter channel RS 485
The GND connection (0 V) of the supply voltage is not connected to the housing			

### Position tolerance

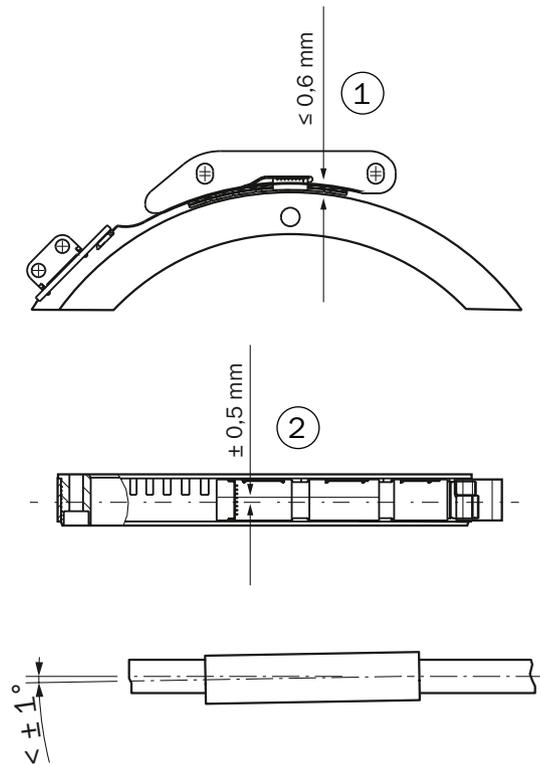

- ① Distance between sensor head and magnetic ring
- ② axial tolerances

Operation note Overview of supported commands for HIPERFACE<sup>®</sup>


Command byte	Function	Comments
42h	Read position	
43h	Set position	
44h	Read analog value	
		Channel number 48h - Temperature in °C F0h - Temperature compatible to product families SCx °C * 2,048 - 40
46h	Read counter	
47h	Increment Counter	
49h	Delete counter	
4Ah	Read data	
4Bh	Store data	
4Ch	Determine status of a data field	
4Dh	Create data field	
4Eh	Determine available memory area	
4Fh	Change access code	
50h	Read encoder status	
52h	Read out type label	Encoder type = FFh
53h	Encoder reset	
55h	Allocate encoder address	
56h	Read serial number and program version	
6Ch	Read Synchronization Offset	

Operation note Overview of warnings and fault indications

	Status code	Description
Error type	00h	The encoder has not detected any faults
Initialization	01h	Incorrect alignment data
	02h	Incorrect internal angular offset
	03h	Data field partitioning table destroyed
	04h	Analog limit values not available
	05h	Internal I2C bus inoperative
	06h	Internal checksum error
Protocol	07h	Encoder reset occurred as a result of program monitoring
	09h	Parity error
	0Ah	Checksum of transmitted data is incorrect
	0Bh	Unknown command code
	0Ch	Number of transmitted data is incorrect
	0Dh	Transmitted command argument is not allowed
Data	0Eh	The selected data field may not be written to
	0Fh	Incorrect access code
	10h	Size of specified data field cannot be changed
	11h	Specified word address lies outside the data field
Position	12h	Access to non-existent data field
	01h	Analog signals outside specification
	1Fh	Speed too high, no position formation possible
Other	20h	Singleturn position unreliable
	1Ch	Value monitoring of the analog signals (process data)
	1Dh	Transmitter current critical or P2RAM-Error
	1Eh	Encoder temperature critical
	08h	Counter overflow

For more information on the interface see HIPERFACE® - description, part no. 8010701

Operation note

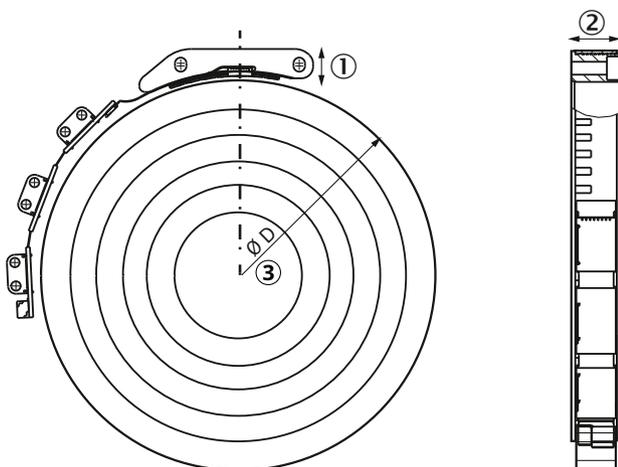

- ① Height 10 mm
- ② encoder width 12. mm
- ③ Magnet ring sizes

Parameter	Inner diameter
D1	30 mm

<b>Parameter</b>	<b>Inner diameter</b>
D4	65 mm
D5	84 mm
Dx	Weitere Ringgrößen auf Anfrage

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)