

DBS36E-BBENZOS36

DBS36/50

INCREMENTAL ENCODERS

SICK
Sensor Intelligence.

Illustration may differ

Ordering information

Type	part no.
DBS36E-BBENZ0S36	1094131

Other models and accessories → www.sick.com/DBS36_50



Detailed technical data

Features

Special device	✓
Specialty	Customized flange adapter Customized label Cable, 8-wire, universal, 10 m with customer-specific cable end (the wires for Z and Z- are cut and the A- and B- wires are merged into heat-shrink tubing) Additional customer-specific packaging label (with bar code for project BAA633A1 (format 128))
Standard reference device	DBS36E-BBEN01024, 1073604
Additional information	Project BAA633A1

Safety-related parameters

MTTF_D (mean time to dangerous failure)	600 years (EN ISO 13849-1) ¹⁾
--	--

¹⁾ This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40 °C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

Performance

Pulses per revolution	1,024
Measuring step	90°, electric/pulses per revolution
Measuring step deviation	± 18° / pulses per revolution
Error limits	± 54° / pulses per revolution
Duty cycle	≤ 0.5 ± 5 %

Interfaces

Communication interface	Incremental
Communication Interface detail	HTL / Push pull
Number of signal channels	6-channel
Initialization time	< 3 ms
Output frequency	≤ 300 kHz
Load current	≤ 30 mA
Power consumption	≤ 0.5 W (without load)

Electronics

Connection type	Special version
Connection type Detail	Cable, 8-wire, universal, 10 m with customer-specific cable end (the wires for Z and Z- are cut and the A- and B- wires are merged into heat-shrink tubing)
Supply voltage	7 ... 30 V
Reference signal, number	1
Reference signal, position	90°, electric, logically gated with A and B
Reverse polarity protection	✓
Short-circuit protection of the outputs	✓ ¹⁾

¹⁾ The short-circuit rating is only given if Us and GND are connected correctly.

Mechanics

Mechanical design	Blind hollow shaft
Shaft diameter	8 mm Front clamp ¹⁾
Weight	+ 150 g (with connecting cable)
Shaft material	Stainless steel
Flange material	Aluminum
Housing material	Aluminum
Material, cable	PVC
Start up torque	+ 0.5 Ncm (+20 °C)
Operating torque	0.4 Ncm (+20 °C)
Permissible movement static	± 0.3 mm (radial) ± 0.5 mm (axial) ²⁾
Permissible movement dynamic	± 0.1 mm (radial) ± 0.2 mm (axial) ²⁾
Operating speed	6,000 min ⁻¹ ³⁾
Maximum operating speed	≤ 8,000 min ⁻¹ ⁴⁾
Moment of inertia of the rotor	0.8 gcm ²
Bearing lifetime	2 x 10 ⁹ revolutions
Angular acceleration	≤ 500,000 rad/s ²

¹⁾ Order collets for 5 mm, 6 mm and 1/4" mm separately as accessories.

²⁾ Higher values are possible using limited bearing life.

³⁾ Allow for self-heating of 4.7 K per 1,000 rpm when designing the operating temperature range.

⁴⁾ No permanent operation. Decreasing signal quality.

Ambient data

EMC	According to EN 61000-6-2 and EN 61000-6-3 (class A)
Enclosure rating	IP65
Permissible relative humidity	90 % (Condensation not permitted)
Operating temperature range	-20 °C ... +85 °C, -35 °C ... +95 °C on request
Storage temperature range	-40 °C ... +100 °C, without package
Resistance to shocks	100 g, 6 ms (EN 60068-2-27)
Resistance to vibration	20 g, 10 Hz ... 2,000 Hz (EN 60068-2-6)


Certificates

EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
China RoHS	✓
cRUus certificate	✓
Information according to Art. 3 of Data Act (Regulation EU 2023/2854)	✓

Classifications

ECLASS 5.0	27270501
ECLASS 5.1.4	27270501
ECLASS 6.0	27270590
ECLASS 6.2	27270590
ECLASS 7.0	27270501
ECLASS 8.0	27270501
ECLASS 8.1	27270501
ECLASS 9.0	27270501
ECLASS 10.0	27270501
ECLASS 11.0	27270501
ECLASS 12.0	27270501
ETIM 5.0	EC001486
ETIM 6.0	EC001486
ETIM 7.0	EC001486
ETIM 8.0	EC001486
UNSPSC 16.0901	41112113

Dimensional drawing

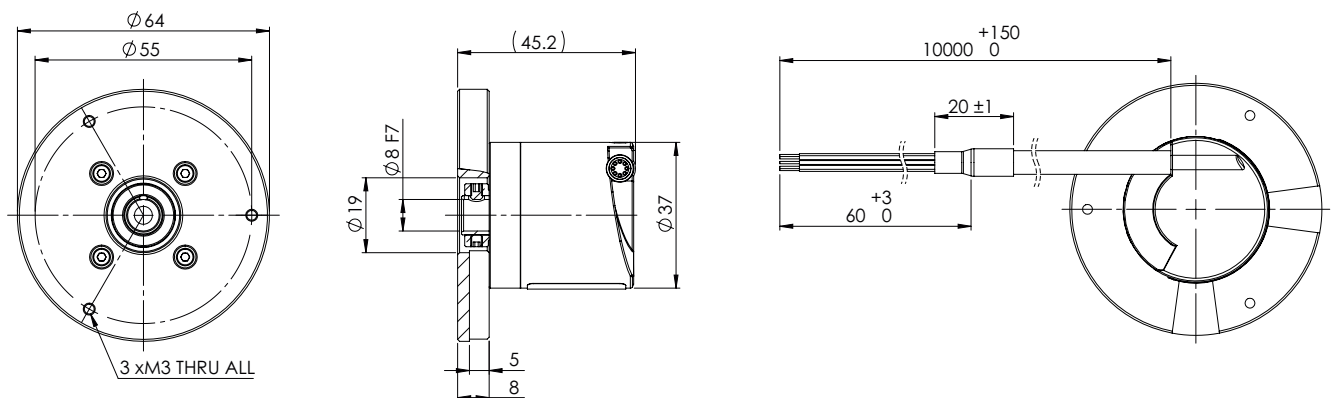

Dimensions in mm (inch)

Attachment specifications



	Encoder	
6 mm	DBS36E-BA	2056390Premounted
5 mm	DBS36E-BB	2066991
6 mm		2056390
1/4"		On request
8 mm		Not required

PIN assignment




Wire color	Signal TTL/ HTL 6-channel	Explanation
brown	A-	Signal wire
white	A	Signal wire
black	B-	Signal wire
pink	B	Signal wire
Yellow	Z-	Signal wire
purple	Z	Signal wire
blue	GND	Ground connection of the encoder
Red	+Us	Supply voltage
-	Not connected	Not connected
-	Not connected	Not connected
-	Not connected	Not connected
-	Not connected	Not connected
Shield	Shield	Shield (connected with housing on the encoder side)

Type label Packaging label

SICK	Lines	VDC	Driver
	1024	7..30V	HTL
Incr. Encoder	DBS36E- BBENZ0S36		
Ident. Nr. YYWW - cn	1094131 1804-0001		
Sick, D-79183 Waldkirch	 Made in Malaysia		

	Otis
	A United Technologies Company
ENCODER INCREMENTAL BAA633A1	
ATENÇÃO: ESTE É UM INSTRUMENTO DELICADO PARA MEDIÇÃO. QUEDA, DESCUIDO NO MANUSEIO, OU ESFORÇOS RADIAIS OU AXIAIS EXCESSIVOS PODEM DANIFICA- LO.	

Type label

SICK	OTIS Part Nr:	Lines	VDC	Driver																				
	BAA633A1	1024	7..30V Class2	HTL																				
Incr.Encoder	DBS36E- BBENZ0S36																							
Ident. Nr. YYWW - cn	1094131 1804-0001																							
 Made in Malaysia	 	<table border="1"> <thead> <tr> <th>Signal</th> <th>Wire Color</th> <th>Signal</th> <th>Wire Color</th> </tr> </thead> <tbody> <tr> <td>+ US</td> <td>Red</td> <td>A</td> <td>White</td> </tr> <tr> <td>GND</td> <td>Blue</td> <td>A-</td> <td>Brown</td> </tr> <tr> <td>Z</td> <td>Lilac</td> <td>B</td> <td>Pink</td> </tr> <tr> <td>Z-</td> <td>Yellow</td> <td>B-</td> <td>Black</td> </tr> </tbody> </table>			Signal	Wire Color	Signal	Wire Color	+ US	Red	A	White	GND	Blue	A-	Brown	Z	Lilac	B	Pink	Z-	Yellow	B-	Black
Signal	Wire Color	Signal	Wire Color																					
+ US	Red	A	White																					
GND	Blue	A-	Brown																					
Z	Lilac	B	Pink																					
Z-	Yellow	B-	Black																					

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com